

321Madlazim.pdf

by


Submission date: 09-Mar-2018 01:40AM (UTC+0700)

Submission ID: 927366550

File name: 321Madlazim.pdf (2.36M)

Word count: 3320

Character count: 17231

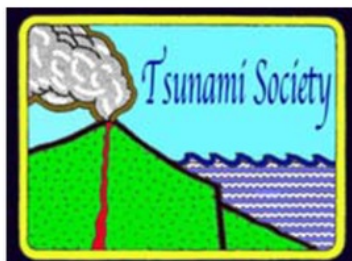

ISSN 8755-6839

SCIENCE OF TSUNAMI HAZARDS

Journal of Tsunami Society International

Volume 32

Number 1

2013

ASSESSMENT OF TSUNAMI GENERATION POTENTIAL THROUGH RAPID ANALYSIS OF SEISMIC PARAMETERS

Case study: Comparison of the Sumatra Earthquakes
of 6 April and 25 October 2010

Madlazim

*Physics Department, Faculty of Mathematics and Sciences, Surabaya State University
(UNESA) Jl. Ketintang, Surabaya 60231, INDONESIA.
e-mail: m_lazim@physics.its.ac.id*

ABSTRACT

The purpose of the research was to estimate P-wave rupture durations (T_{dur}), dominant periods (T_d) and rupture durations greater than 50 seconds (T_{50Ex}) for two large, shallow earthquakes, which occurred off the coast of Sumatra on 6 April and 25 October 2010. Although both earthquakes had similar parameters of magnitude and focal depth, the 25 October event ($M_w=7.8$) generated a tsunami while the 6 April event ($M_w=7.8$) did not. Analysis of the above stated parameters helped understand the mechanisms of tsunami generation of these two earthquakes. Measurements from vertical component broadband P-wave quake velocity records and determination of the above stated parameters could provide a direct procedure for assessing rapidly the potential for tsunami generation. The results of the present study and the analysis of the seismic parameters helped explain why one event generated a tsunami, while the other one did not.

Keywords: *P-wave; rupture duration; dominant period; rupture duration greater than 50 seconds; direct procedure.*

Vol. 32, No. 1, page 29 (2013)

1. INTRODUCTION

Seismological agencies such as the Japan Meteorology Agency (JMA), the Indonesian Tsunami Early Warning System (Ina-TEWS), the Tsunami Warning Center of West Coast/Alaska (WCATWC) and the Pacific Tsunami Warning Center (PTWC), measure and determine quickly earthquake parameters of location, depth and magnitude. Based on assigned threshold limits for earthquakes that have the potential to generate a tsunami with a height of 0.5 meters or more, JMA provides a warning for Japan in about three minutes after the origin time (OT). Similarly applying the same earthquake threshold criteria, Ina-TEWS provides early warning in about five minutes after OT. Both WCATWC and PTWC issue tsunami warnings in about five to ten minutes after OT, for shallow, North America and Pacific earthquakes, which have magnitudes greater than ($M_w \geq 7.5$). In spite of the fact that all warnings that are issued by these centers are based on earthquake parameters that meet criteria of location, depth < 70 km and magnitude > 7 , not all such earthquakes generate tsunamis and some of the warnings that may be issued are improperly labeled as “false”. However, none of the warnings issued in real-time can be considered as false. There is simply not sufficient seismic data in real-time to assess the tsunami potential of each event. Thus, a method that can help evaluate an event’s additional, initial seismic parameters, may lead to better assessment of its potential for the generation of a destructive tsunami.

The present study was undertaken to evaluate two large, shallow earthquakes, which occurred off the coast of Sumatra on 6 April and 25 October 2010. Although both earthquakes had similar parameters of magnitude and focal depth, the 25 October event ($M_w=7.8$) generated a tsunami while the 6 April event ($M_w=7.8$) did not.

2. SEISMIC SETTING AND EARTHQUAKE PARAMETERS

Indonesia is one of the most seismically active zones on earth. Most earthquakes near the Sunda Trench are shallow, but deeper earthquakes also occur along the Benioff/Wadati zone as the Australia-Indian Plate subducts beneath the Sunda micro-plate. Figure 1 shows the historic seismic activity from 1997 to 2012 near the epicenters of the two earthquakes of 6 April and 25 October 2010. Both of these earthquakes fit well the pattern of focal depths that occur near the subsurface boundary of Australia-Indian tectonic plate and of the Sunda microplate.

As shown in Figure 1, the Centroid Moment Tensors (CMT) of both 2010 events had almost identical CMT parameters. However the 25 October earthquake generated a tsunami while the 6 April event did not. Although, moment magnitude (M_w) is usually a good discriminant for many earthquakes as to their potential for tsunami generation, events characterized as “tsunami earthquakes, can generate larger tsunami waves than would be expected from just their moment magnitude (Kanamori, 1972; Satake, 2002; Polet & Kanamori, 2009; Lomax & Michelini, 2011).

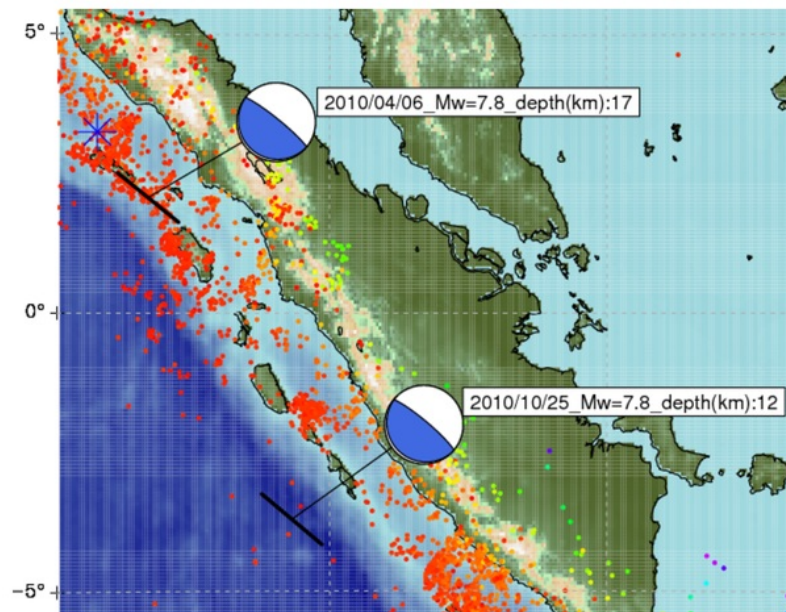


Figure 1. Centroid Moment Tensors (CMT) of the 6 April and 25 October 2010 earthquakes. Both events were shallow, had magnitudes of $M_w=7.8$ and reverse focal mechanism.

(<http://www.globalcmt.org/CMTsearch.html>). <Figure produced by using CRAN-R and GEOMAP (Madlazi, 2010; Lees, 2012)>.

The potential for tsunami generation by an shallow focus earthquake near the coast or at sea, relates to its seafloor crustal displacements, which depend on length L , width W , mean slip D , (LWD) and depth, z , of an earthquake's rupture. Correlation between LWD and M_0 can be written as:

$$M_0 = \mu LWD$$

or

$$LWD = M_0/\mu,$$

where μ is the shear modulus at the source. The seafloor displacement and thus tsunami potential should scale with:

$$LWD = M_0/\mu.$$

If μ is taken as constant for all shallow earthquakes, M_0 and the corresponding M_w should be good discriminants for tsunami potential; indeed, for a point source, the tsunami wave amplitude is expected to be directly proportional to M_0 (Okal 1988). These effects can cause an underestimate by

M_w of an effective LWD value to explain the observed tsunami waves (Okal, 1988; Satake, 1994; Geist and Bilek, 2001; Lay and Bilek, 2007; Polet and Kanamori, 2009; Lomax and Michelini, 2011). To estimate M_w one cannot use a direct procedure, but may use an indirect procedure. However LWD can be estimated by using a direct procedure (Madlazim, 2011a, b, c, d).

T_{50Ex} and T_{dur} , have good correlation to the tsunami size measures because T_{50Ex} and T_{dur} is related directly to a component of the LWD source - the rupture length

$$L: T_{dur} \propto L/v_r,$$

where v_r is the rupture velocity (Lomax and Michelini, 2009; Lomax and Michelini, 2011; Madlazim, 2011b). Furthermore, v_r with S -wave velocity and shear modulus μ , increases with depth while v_r is found to be very low at shallow depth for tsunami earthquakes (Geist and Bilek, 2001; Polet and Kanamori, 2009; Lomax and Michelini, 2011). The dominant period T_d , as the peak τ_c value is obtained is applied with a 5 second sliding time window from 0 to 55 seconds after P wave arrival (Lomax and Michelini, 2011). The definition of T_d follows from assessment of numerous possible parameters with the goal of better discrimination of a tsunamigenic earthquake. The value of 5 seconds for the time window is sufficient to identify if T_d is greater or less than about 10 seconds.

The present study measured P -wave rupture duration (T_{dur}), dominant period (T_d) and rupture duration greater than 50 second (T_{50Ex}) for the two large Sumatra earthquakes as recorded by the vertical components of seismographs, for the purpose of describing why the 25 October event ($M_w=7.8$) generated a tsunami while the 6 April event ($M_w=7.8$) did not.

3. DATA

The research criteria for the analysis of the two Sumatra earthquakes were: (1) what occurred after 2008 on the data available by the GEOFON-BMKG network; (2) the centroid depth was shallow (≤ 20 km); (3) the moment magnitudes in the Global CMT catalog of both earthquakes are almost identical at 7.8; (4) the half duration is almost the same at about 20 seconds; (5) the focal mechanism types are almost the same (reverse). The CMT parameters of the earthquakes are shown in Figure 1 and Table 1 below. In conducting the investigation, we retrieved BHZ channel waveforms of the GEOFON-BMKG network stations for these earthquakes from GEOFON-BMKG (Fig. 2). As described in Madlazim (2011b), data was used from the stations within the epicentral distance ranging from $4^\circ - 15^\circ$. This was done in order to avoid scattering due to the upper mantle or D structures (Shearer and Earle, 2004; Hara, 2007).

Table 1. Comparison of CMT parameters of the 6 April and 25 October 2010 Sumatra earthquakes

Event	Lat	Long	Depth	St1; St2	Dp1; Dp2	Sl1; Sl2	Mw	HD (s)
2010/04/06 22:15	2.07	96.74	17.6	307; 129	7; 83	88; 90	7.8	19.5
2010/10/25 14:42	3.71	99.32	12.0	316; 130	8; 82	98; 89	7.8	19.9

(<http://www.globalcmt.org/>). St1: strike 1, Dp1: dip 1. Sl1: slip 1, HD: Half duration

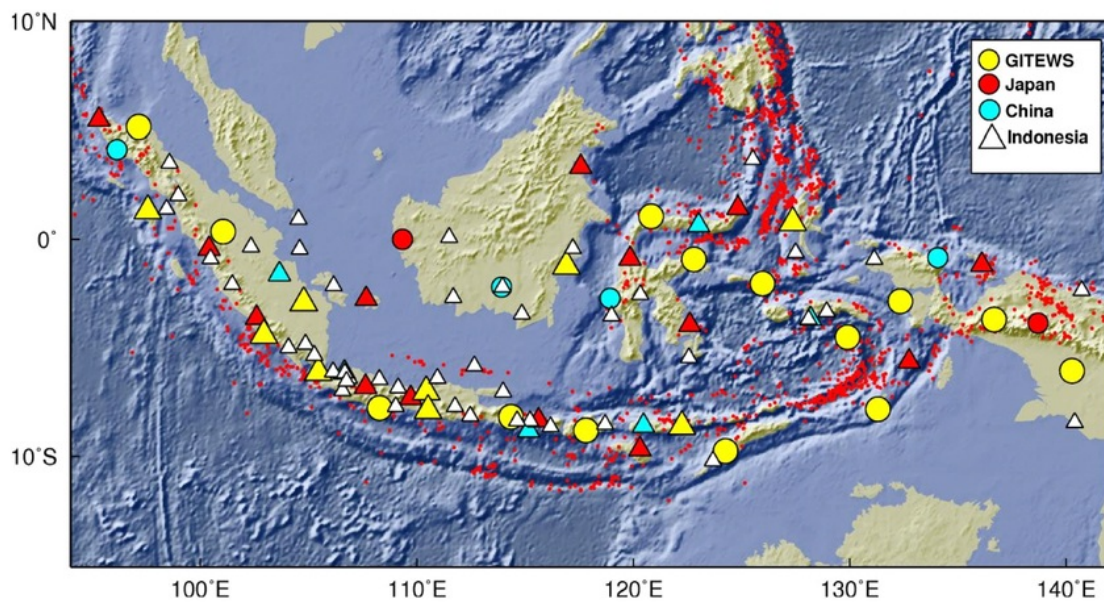


Figure 2. Stations used to estimate T_{dur} , T_d and $T50Ex$ for the 6 April and 25 October 2010 earthquakes. (www.fdsn.org/meetings/.../fdsn_indoc_net.ppt)

4. METHOD

We determined T_{dur} for the earthquakes, through high-frequency (HF) analysis of the vertical-component, broadband seismograms as described in the literature (Lomax and Michelini, 2005; Lomax et al., 2007; Lomax and Michelini, 2009; Lomax and Michelini, 2011; Madlazim, 2011b). T_d The estimation was done by using direct procedure, namely: (1) by refining the vertical component velocity seismograms recorded by the GEOFON-BMKG networks by using a Butterworth filter at high frequency (5 - 20 Hz); (2) by picking the arrival time of the P wave automatically; (3) by integrating the vertical component velocity seismograms and comparing with the vertical component

acceleration seismograms, multiplied by 2π ; and (4) by the value of T_d which is the culmination of the results of such integration. For estimating $T50Ex$ we used a direct procedure by the following steps: (1) to (2) the same as those estimated T_d ; (3) by calculating the rms amplitude (A_r) and $T50$; and (4) by calculating $T50Ex$ which is a comparison between $T50/A_r$. Figure 3 and 4 are flow charts which outline the direct procedure of P-wave dominant period and $T50Ex$, respectively.

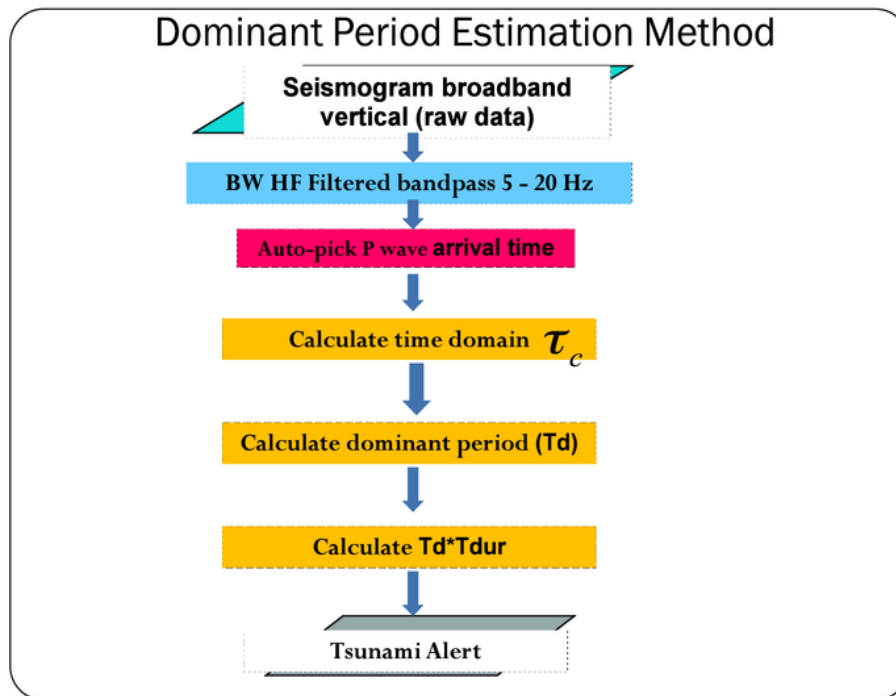


Figure 3. Direct procedure to estimate P-wave dominant periods

The importance of Tsunami generation “ I_t ”, of the two Sumatra earthquakes was determined based on 0 - 4 descriptive indices “ I ”, of tsunami effects (deaths, injuries, damage, houses destroyed), and maximum water height “ h ” in meters from the NOAA/WDC Historical Tsunami Database (http://www.ngdc.noaa.gov/hazard/tsu_db.shtml) in order to determine the potential of earthquake tsunami generation, where:

$$I_t = i_{\text{height}} + i_{\text{deaths}} + i_{\text{injuries}} + i_{\text{damage}} + i_{\text{houses-destroyed}}$$

where $i_{\text{height}} = 4, 3, 2, 1, 0$ for $h = 10, 3, 0.5$ m, $h > 0$ m, $h = 0$ m respectively (Lomax and Michelini, 2009). Based on this equation, we got values of $I_t = 1$ (no tsunami) for the 6 April 2010 earthquake and $I_t = 13$ (tsunami) for the 25 October 2010, event.

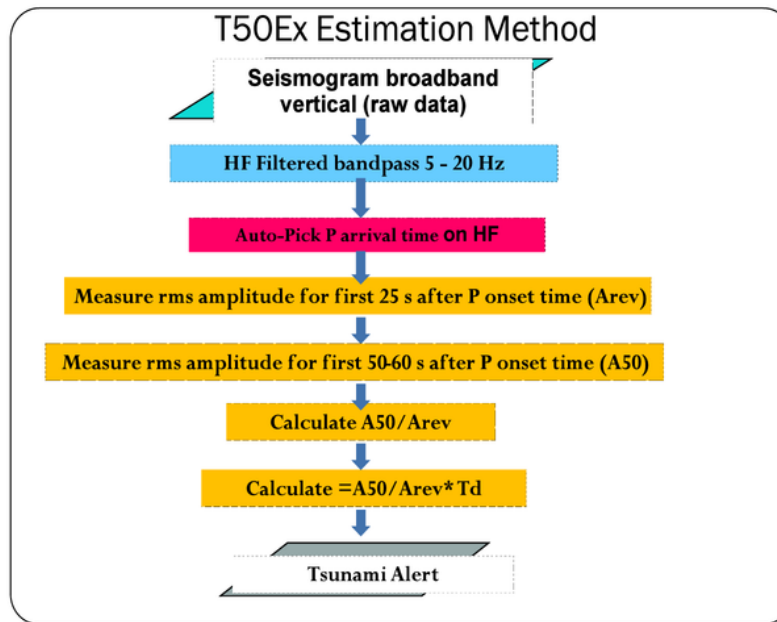


Figure 4. Direct procedure to estimate P-wave T50Ex

5. RESULTS AND DISCUSSION

The discriminant tsunami potential $T_{dur}T_d$ and T_dT50Ex correctly identified for the two tsunamigenic events with $It = 13$ (tsunami), $M_w = 7.8$ for the 25 October event and $It = 1$ (no tsunami), $M_w = 7.8$ for the 6 April event (Table 2)., more than the M_w and T_{dur} only discriminants (Lomax and Michelini, 2011; Madlazim, 2011). This result evaluated for the 6 April event in my previous study, did not use this methodology.

Table 2. Analysis result of discriminants tsunami potential by using the direct procedure

Event	Lat	Lon	Depth (km)	Fault type	M_w	T_{dur}	T_d	$T50Ex$	$T_{dur}T_d$	T_dT50Ex	It
20100406	2.07	96.74	17.6	Reverse	7.8	116	3.1	0.9	359	2.79	1
20101025	- 3.71	99.32	12.0	Reverse	7.8	136	8.7	1.5	945	13.2	13

Discriminant tsunami potential T_{dur} , T_d and $T_d T_{50Ex}$ critical threshold for 6 April 2010 event, $T_{dur} T_d < 550 \text{ s}^2$ and $T_d T_{50Ex} < 10 \text{ s}^2$ (no tsunami), respectively would provide important complementary information to initial location, depth and magnitude estimates for early assessment of earthquake tsunami potential. Since T_d is obtained rapidly ($< 60 \text{ s}$) after the P arrival, it remains to rapidly assess T_{dur} for an earthquake, in particular if $T_{dur} > 55 \text{ s}$, $T_d < 10 \text{ s}$ and $T_{50Ex} < 1$. Discriminant tsunami potential $T_{dur} T_d$ and $T_d T_{50Ex}$ critical threshold for the 25 October 2010 event, $T_{dur} T_d > 550 \text{ s}^2$ and $T_d T_{50Ex} > 10 \text{ s}^2$ (tsunami), it remains to rapidly assess T_{dur} for an earthquake, in particular if $T_{dur} > 55 \text{ s}$, $T_d > 10 \text{ s}$ and $T_{50Ex} > 1$. By using the direct procedure (Lomax and Michelini, 2009; Madlazim, 2011b; Madlazim, 2012), we determined if T_{dur} for an earthquake is likely to exceed 55 – 60 seconds through HF analysis of vertical-component, broadband seismograms. On 5 – 20 Hz band pass filtered seismogram for local seismograms and on 1 – 1 Hz for teleseismic seismograms (Lomax and Michelini, 2011; Madlazim, 2011b). We formed the ratio of the rms amplitude from 50–60 seconds after the P with the rms amplitude for the first 25 s after the P to obtain a station for 50–55 seconds (Lomax and Michelini, 2011; Lomax and Michelini, 2012; Madlazim, 2012). Based on this study and our previous work (Madrilazim, 2011b; Madlazim, 2012), with large earthquakes data sets, we estimate that measures from 11–22 stations are needed to obtain stable estimates of T_{dur} , T_d and T_{50Ex} .

We identified the most critical parameters for discrimination of earthquake tsunami potential. The performance of the T_{dur} , T_d , T_{50Ex} , $T_{dur} T_d$ and $T_d T_{50Ex}$ discriminants, though improved by the T_{dur} , T_d , T_{50Ex} values, is dominated by the T_d , T_{50Ex} values (Table 2), T_{dur} and T_{50Ex} for large earthquakes is probably related primarily to rupture length, L and T_d for large earthquakes is probably related primarily to rupture width, W and slip, D . We have shown that T_{dur} , T_d , T_{50Ex} , $T_{dur} T_d$ and $T_d T_{50Ex}$ may inherently account for source depth, and that $T_{dur} T_d$ and $T_d T_{50Ex}$ may be proportional to Amplitude of the seismogram. These results imply that rupture length, L and depth, z , alone can constrain well the tsunami potential of an earthquake. Then information on the fault width W , and slip D is of secondary importance, though perhaps provided by T_d for some event types, or implicitly through scaling relations such as $W \propto L$ and $D \propto L$. There is the suggestion that tsunami potential is more affected by T_{dur} , T_d , T_{50Ex} , $T_{dur} T_d$ and $T_d T_{50Ex}$ as function LWD than the location, depth and M_w discriminants. The T_{dur} , T_d , T_{50Ex} , $T_{dur} T_d$ and $T_d T_{50Ex}$ discriminants were identified better than M_w and T_{dur} for these events.

6. CONCLUSIONS

The above described analysis based on the inherent sensitivity of T_{dur} and T_{50Ex} to rupture length, L and source depth z , indicate that the tsunami potential for these earthquake types can be well constrained by the rupture length L and some mean rupture depth z . Furthermore, the explicit information on T_d indicates that the tsunami potential for such earthquake types can be well constrained by the rupture fault width W , or the mean slip D , which are parameters of lesser importance.

The results of the analysis imply that the tsunami potential of an earthquake is not a simple function of the potency of LWD as it is assumed with the use of the M_w discriminant. To evaluate the

tsunami potential for oceanic reverse earthquakes, further research is needed in finding direct measures and discriminants for events which are occasionally highly tsunamigenic. For the two earthquakes that were analyzed by this study, the T_{dur} , the T_d , the T50Ex, the T_{dur} the T_d and the T_d T50Ex discriminants were identified as being better than Mw and T_{dur} .

ACKNOWLEDGMENTS

The GEOFON-BMKG-IA network (<http://webdc.eu>) provided access to waveforms used in this research; I thank all the people who install, operate and maintain the seismic stations in Indonesia. The Global CMT Catalog (<http://www.globalcmt.org/MTsearch.html>) provided access to CMT data used in this research. Furthermore, I thank Anthony Lomax and Michelini who gave us guidance in understanding the rupture duration, dominant period and T50Ex estimation and in applying the SeisGram2k software to estimate these parameters (<http://alomax.free.fr/software.html>). Our discussions with them were beneficial. Finally, I thank Dr. George Pararas-Carayannis for editing certain sections to make them clearer for reading.

REFERENCES

- Geist, E.L. & Bilek, S.L., 2001. Effect of depth-dependent shear modulus on tsunami generation along subduction zones, *Geophys. Res. Lett.*, 28, 1315–1318, doi:10.1029/2000GL012385.
- Gomez, J.M., Madariaga, R., Walpersdorf, A., and Chalard, E., 2000. The 1996 Earthquakes in Sulawesi, Indonesia, *Bull. Seism. Soc. Am.*, 90, 3, pp. 739–751.
- Hara, T., 2007. Measurement of the duration of high-frequency energy radiation and its application to determination of the magnitudes of large shallow earthquakes, *Earth Planets Space*, 59, 227–231.
- Hirshorn, B. & Weinstein, S., 2009. Rapid estimates of earthquake source parameters for tsunami warning, in *Encyclopedia of Complexity and Systems Science*, p. 10370, ed. Meyers, A., Springer, New York, doi:10.1007/978-0-387-30440-3_160.
- Kanamori, H., 1972. Mechanism of tsunami earthquakes, *Phys. Earth planet. Int.*, 6, 246–259.
- Lay, T. & S. Bilek, 2007. Anomalous earthquake ruptures at shallow depths on subduction zone megathrusts, in *The Seismogenic Zone of Subduction Thrust Faults*, pp. 692, eds Dixon, T.H. and Moore, C., Columbia Univ. Press, New York, ISBN: 978-0-231-13866-6.
- Lees, 2012, GEOMap: Topographic and Geologic Mapping, <http://cran.r-project.org/web/packages/GEOMap/index.html>
- Lomax, A. & Michelini, A., 2009. Tsunami early warning using earthquake rupture duration, *Geophys. Res. Lett.*, 36, L09306, doi:10.1029/2009GL037223.
- Lomax, A. and A. Michelini, 2011. Tsunami early warning using earthquake rupture duration and P-wave dominant period: the importance of length and depth of faulting, *Geophys. J. Int.* 185, 283–291, doi: 10.1111/j.1365-246X.2010.04916.x.

- Lomax, A. and A. Michelini (2012), Tsunami early warning within 5 minutes, *Pure and Applied Geophysics*, 169, nnn-nnn, doi: [10.1007/s00024-012-0512-6](https://doi.org/10.1007/s00024-012-0512-6)
- Madlazim, Bagus Jaya Santosa, Jonathan M. Lees and Widya Utama, 2010. Earthquake Source Parameters at Sumatran Fault Zone: Identification of the Activated Fault Plane, *Cent. Eur. J. Geosci.*, 2(4), 2010. DOI:10.2478/v10085-010-0016-5.
- Madlazim, 2011a. CMT, Fault Plane and Rupture Duration for Earthquakes in Sumatra and Possibility of its Implementation for Tsunami Early Warning System, PhD Program of Technology Sepuluh Nopember Institute (ITS) Surabaya. Dissertation.
- Madlazim (2011b), Toward Indonesian Tsunami Early Warning System by Using Rapid Rupture Duration Calculation, *Science of Tsunami Hazards*, Vol 30, No. 4, Tsunami Society International, USA.
- Madlazim (2011c), Menuju Sistem Peringatan Dini Tsunami Menggunakan Perhitungan Durasi Rupture Gempabumi secara Cepat dan Tepat, Edisi 3, 2011, Himpunan Ahli Geofisika Indonesia (HAGI).
- Madlazim, (2011d), Estimasi Durasi, Arah dan Panjang Rupture, serta Lokasi-lokasi Gemabumi Susulan Menggunakan Perhitungan Cepat, *Jurnal Penelitian Fisika dan Aplikasinya (JPFA)*, Vol 2, No. 2.
- Madlazim (2012), Toward tsunami early warning system in Indonesia by using rapid rupture durations estimation, *AIP Conf. Proc.* 1454, pp. 142-145; doi:<http://dx.doi.org/10.1063/1.4730707> (4 pages) INTERNATIONAL CONFERENCE ON PHYSICS AND ITS APPLICATIONS: (ICPAP 2011).
- Madlazim (2012), Menuju Peringatan Dini Tsunami Menggunakan Perhitungan Cepat Periode Dominan dan T50 Exceeds, Seminar Ilmiah Bulanan BMKG "Scientific Journal Club" Kerjasama BMKG-ITS, Surabaya, Kamis, 27 September 2012.
- Nakamura, Y., 1988. On the urgent earthquake detection and alarm system (UrEDAS), in *Proc. of the 9th World Conference on Earthquake Engineering*, Tokyo-Kyoto, Japan.
- Okal, E.A., 1988. Seismic parameters controlling far-field tsunami amplitudes: a review, *Nat. Hazards*, 1, 67–96.
- Polet, J. & Kanamori, H., 2009. Tsunami Earthquakes, in *Encyclopedia of Complexity and Systems Science*, p. 10370, ed. Meyers, A., Springer, New York, doi:10.1007/978-0-387-30440-3_567.
- Satake, K., 1994. Mechanism of the 1992 Nicaragua tsunami earthquake, *Geophys. Res. Lett.*, **21**(23), 2519–2522.
- Satake, K., 2002. Tsunamis, in *International Handbook of Earthquake and Engineering Seismology*, pp. 437–451, eds Lee, W.H.K., Kanamori, H., Jennings, P.C. & Kisslinger, C., Academic Press, Amsterdam.
- Shearer, P. M. and P. S. Earle, The global short-period wave-field modeled with a Monte Carlo seismic phonon method, *Geophys. J. Int.*, **158**, 1103–1117, 2004.

ORIGINALITY REPORT

16%
SIMILARITY INDEX

%
INTERNET SOURCES

16%
PUBLICATIONS

%
STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

8%
★ Anthony Lomax, Alberto Michelini. "Tsunami Early Warning Within Five Minutes", Pure and Applied Geophysics, 2012
Publication

Exclude quotes On
Exclude bibliography On

Exclude matches < 10 words