

## Korespondensi Jurnal Eureka

Sen, 31 Okt 2022

### [Eureka: PE] Submission Acknowledgement

Eksternal

Kotak Masuk

Helen Klimashevskaya <info@eu-jr.eu>

Sen, 31 Okt 2022  
22.22

kepada saya

aris ansori:

Thank you for submitting the manuscript, "Enhanced mechanical and water resistance properties of cassava starch-PVA composites with TiO<sub>2</sub> nanofillers for triboelectric nanogenerators films" to EUREKA: Physics and Engineering. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Manuscript URL: <http://journal.eu-jr.eu/engineering/authorDashboard/submission/2647>

Username: arisansori

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Helen Klimashevskaya

The screenshot shows a web browser window displaying the 'EUREKA: Physics and Engineering' submission dashboard. The user is logged in as 'arisansori'. The dashboard title is 'Enhanced mechanical and water resistance properties of cassava starch-PVA composites with TiO<sub>2</sub> nanofillers for triboelectric nanogenerators films'. Below the title, the authors are listed: 'aris ansori, Sudjito Soeparman, Denny Widhiyanuriyawan, Teguh Dwi Widodo'. The dashboard has four tabs: 'Submission', 'Review', 'Copyediting', and 'Production'. The 'Submission' tab is active, showing a table of 'Submission Files'. The table has one entry: '7059-1 arisansori, Manusecrip Eurika.docx' with a date of 'October 31, 2022' and a file type of 'Article Text'. There is a 'Download All Files' button. Below the table is a 'Pre-Review Discussions' section with an 'Add discussion' button. The bottom of the browser window shows the Windows taskbar with several open PDF files: 'C:\2554-Article Tex...pdf', 'C:\2554-Article Tex...pdf', and 'Korespondensi jur...pdf'. An 'Activate Windows' watermark is visible in the bottom right corner.

Name	From	Last Reply	Replies	Closed
No Items				

**Jum, 25 Nov 2022**

**Fwd: from journal «EUREKA: Physics and Engineering» \_№2.2023\_Aris Ansori (please acknowledge receipt of the letter)**

**Eksternal**

Kotak Masuk

Scientific  
Route

**Scientific Route OÜ** <jr@scijr.info>

Jum, 25 Nov 2022  
09.52

kepada saya, sudjitospn, denny\_w, widodoteguhdwi

Hi, what should we do with the article? Why aren't you correcting it?  
I'm waiting for an answer, Helen.

----- Forwarded message -----

От: **Scientific Route OÜ** <jr@scijr.info>

Date: чт, 10 нояб. 2022 г. в 04:09

Subject: from journal «EUREKA: Physics and Engineering» \_№2.2023\_Aris Ansori (please acknowledge receipt of the letter)

To: <arisansori@unesa.ac.id>

Good afternoon, dear authors.

The article was accepted for consideration of the possibility of publication in the journal «**EUREKA: Physics and Engineering**» for №2. 2023 (release until 30.03.2023).

At the 2 - stage of editing, please take into account the editorial comment (article in the application, color notes are highlighted).

We ask you to right strictly in the option which is in the attachment (see attachment).

We ask you not to delete the comments so that we can see all your edits. All corrections by the author, please highlight in green.

Please provide an edited version of the article **by 17.11.2022**.

**A package of documents that we ask you to prepare and send a scanned copy no later than 17.11.2022 is attached:**

1. The license agreement (see attachment) to the article can be drawn up in electronic form and signed by all authors. ID Card - such identifiers can be the number of any identity card, or the date of birth with the registration address.
2. Cover letter (see attachment, please sign only the author, the contact person must be indicated in clause 10.2. Of the License Agreement).

-----  
P.S. We remind you that the publication in our journal is paid, the cost is calculated as follows: Journal «EUREKA: Physics and Engineering» ( <http://journal.eu->

[jr.eu/engineering](http://jr.eu/engineering)), The volume of the article is 10-12 pages = 300 euro, Each subsequent page is 15.00 euro, article translation check - 7 euro.

We work 24/7 and are ready to help you around the clock!


With best regards, Helen Klimashevskia  
Publisher [Scientific Route OÜ](http://ScientificRoute.OÜ)

WhatsApp / Viber / Telegram: +37256101470

<https://route.ee/en/journals>

-----

**Attention!** The author (team of authors) submitting the manuscript to the editorial office of the journal «**EUREKA: Physics and Engineering**» agrees with all requirements for registration, submission of the manuscript of the article, and payment and be responsible in case of violation of these requirements.

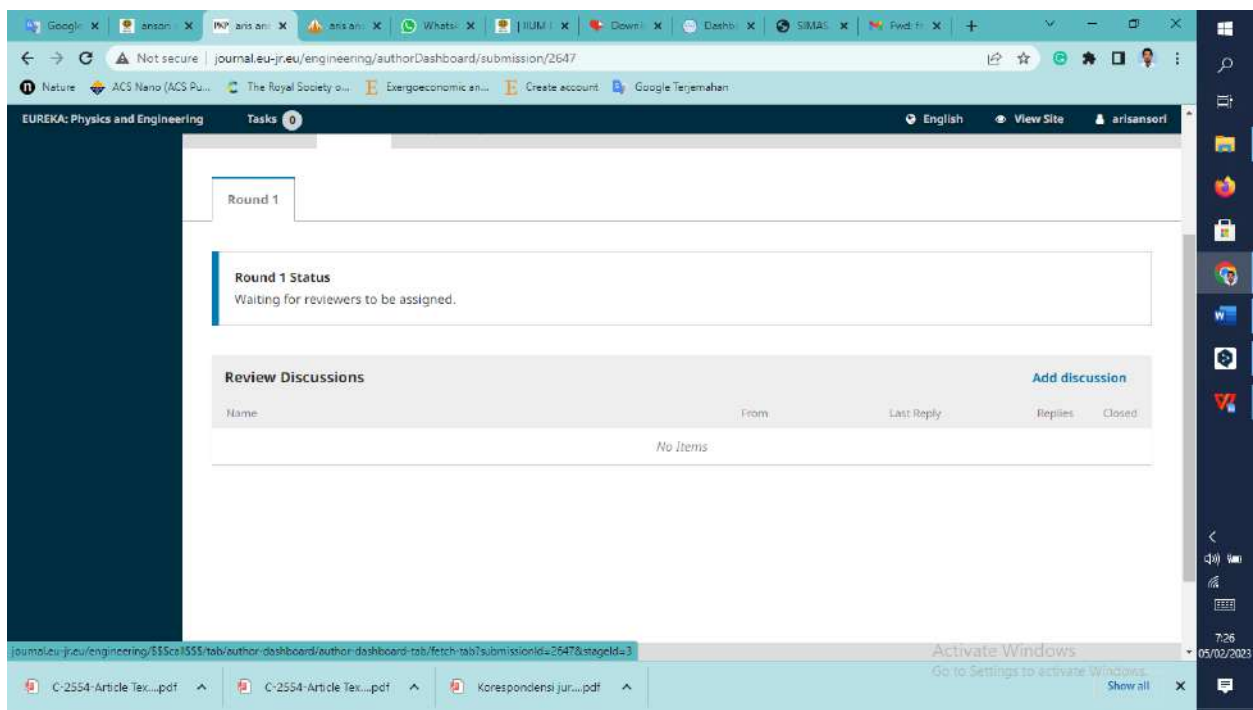

Sel, 20 Des 2022

**Scientific Route OÜ**

Sel, 20 Des 2022  
07.51

kepada saya

Hello!

Your article has been sent for review. The article is still at work. As soon as there is a response from reviewers, we will contact you.

Reviewing is an integral part of the scientific publication, which confirms the high quality of scientific articles. Reviewers are experts who invest their time to improve your article!

In the process of reviewing the manuscript should become:

- More reliable. Reviewers may point out gaps in your work that require more detailed explanation or additional experimentation.
- Easier to understand. If you have a difficult time with your work, the reviewers may ask you to correct it.
- More useful. Reviewers review your research for importance within their subject area. Another aspect of having a review policy with journals is that the editorial team wants to make sure that they publish only high-quality materials in their own publication. If a journal does not publish good quality work, it will reputation and the number of readers will decrease.

We work 24/7 and are ready to help you around the clock!

With best regards, Helen Klimashevskia

Publisher [Scientific Route OÜ](https://route.ee/en/journals)

WhatsApp / Viber / Telegram: +37256101470

<https://route.ee/en/journals>

20 Des 2022

**aris Ansori** <arisansori@unesa.ac.id>

20 Des 2022  
11.51

kepada Scientific

Thank you for your response.

**from journal «EUREKA: Physics and Engineering»  
\_№2.2023\_Ansori (please acknowledge receipt of the  
letter)**

**Scientific Route OÜ**

27 Feb 2023, 03.07 (1 hari  
yang lalu)

Good afternoon, dear authors.

The article was accepted for consideration of the possibility of publication in  
the journal **«EUREKA: Physics and Engineering»** for №2. 2023 (release  
until 30.03.2023).

We work 24/7 and are ready to help you around the clock!

With best regards, Helen Klimashevskaya

Publisher [Scientific Route OÜ](https://route.ee/en/journals)

WhatsApp / Viber / Telegram: +37256101470

<https://route.ee/en/journals>

**from journal «EUREKA: Physics and Engineering»  
(2023), Number 2\_invoice\_Ansori**

Eksternal

Kotak Masuk



**Scientific Route OÜ**

Sen, 13 Mar, 03.58 (9 hari  
yang lalu)

kepada saya

Inggris

Indonesia

[Terjemahkan pesan](#)

Hello, dear authors.

The article was adopted for publication in the March issue of the journal (№2.2023).

Invoice (invoice № 23-49) in the attachment. The amount that you put up was taken into account: payment for an article (25 pages =495 euro), 125 euro - prepress (redistribution of literature on standards APA (registration in accordance with standards, search for and addition of DOI identifiers), internal work of the editorial team over article, checking the translation of an article into a technical one professional English). The total amount to be paid is **620 euro to pay.**

Pay immediately (once received an invoice). Payment must be made strictly or on your behalf or on behalf of the co-author. how just made a payment, please scan the payment and send it to us.

***Dear authors, we expect payment from you no later than March 15,2023.***

Please confirm receipt of the letter.

We work 24/7 and are ready to help you around the clock!

With best regards, Helen Klimashevskaya  
Publisher [Scientific Route OÜ](#)

WhatsApp / Viber / Telegram: +37256101470

<https://route.ee/en/journals>

---

**PAYMENT INSTRUCTIONS:** Important, please pay attention!

When paying for services by bank transfer (international payment in the SWIFT system), please use the OUR\* code (All bank charges and commissions are charged from your account).

To do this, in the payment order, in field 71A "Details of Charges", check: OUR\*.

*\*OUR ("Payer pays all fees" or "Sender bears all transaction fees"): All fees are charged to the sender of the transfer, and the recipient receives the full amount provided by the sender. These fees include fees charged by the sending bank and any fees applied by intermediary banks (correspondent banks).*

---

**Attention!** The author (team of authors) submitting the manuscript to the editorial office of the journal «**EUREKA: Physics and Engineering**» agrees with all requirements for registration, submission of the manuscript of the article, and payment and be responsible in case of violation of these requirements.

**aris Ansori <arisansori@unesa.ac.id>**

Sen, 13 Mar, 07.01 (9  
hari yang lalu)

kepada Scientific

Thanks a lot.

Hi, I remind you that I expect payment from you tomorrow.  
Sincerely, Helena.

**aris Ansori <arisansori@unesa.ac.id>**

Rab, 15 Mar, 10.59 (7 hari  
yang lalu)

kepada Scientific

Dear Editor,

we send you proof of payment for the publication of the journal Eureka: Physics and Engineering. Invoice No. 23- 49 10.03.2023

Thank you.  
best regards  
author

**Scientific Route OÜ**

Rab, 15 Mar, 19.04 (7  
hari yang lalu)

kepada saya

Deteksi bahasa

Indonesia

[Terjemahkan pesan](#)

[Nonaktifkan untuk: Inggris](#)

Good day!  
Thanks! Payment receipt has been received.  
As soon as the payment is credited to the account, I will inform you.  
If you have any questions, please call or write, we will be happy to answer them.  
Best regards, Helen

**Please respond no later than March 14, 2023 - Aris  
Ansori (graphic abstract)**

Eksternal

Kotak Masuk



**Scientific Route OÜ**

Min, 12 Mar, 22.46 (10  
hari yang lalu)

kepada saya, sudjitospn, denny\_w, widodoteguhdwi

Inggris

Indonesia

[Terjemahkan pesan](#)



Hello, dear authors.

Your article has been accepted for publication in the March issue of **EUREKA: Physics and Engineering No. 2.2023**. We want your article to be seen by more people and readers in order to increase interest in your article worldwide. That's why we will add your "graphic abstract" drawing next to your article on the journal website (in the journal archive, you can already see an example here <http://journal.eu-jr.eu/engineering/issue/view/232>). Remember that this is important and affects the citation of your article, so please send the "graphic abstract" no later than 14.03.2023.

***For your information:***

*A graphical abstract is an image that appears alongside the text abstract in the contents. This is a single, concise, pictorial and visual summary of the main findings of the article.*

*A graphical abstract should allow readers to quickly gain an understanding of the take-home message of the paper and is intended to encourage browsing, promote interdisciplinary scholarship, and help readers identify more quickly which papers are most relevant to their research interests.*

*Authors must provide an image that clearly represents the work described in the paper. It could either be the superposition of several figures from the article or a figure that is specially designed for the purpose. Any postage stamps, currency from any country, or trademarked items should not be included in it. Graphical abstracts should be submitted as a separate file.*

***Requirements for graphical abstract:***

- *Image size: the minimum required size for the graphical abstract is 560 × 1100 pixels (height × width) with minimum resolution of 300 dpi. If you are submitting a larger image, please use the same ratio. Please note that your image will be scaled proportionally to fit in the available window.*
- *Font: please use font with a large enough font size as the image will be reduced in size for the table of contents to fit a window.*
- *File type: .jpg, .jpeg, .png.*
- *File size: no more than 5 Mb.*

*No additional text, outline or synopsis should be included. Any text or label must be part of the image file. Please do not use unnecessary white space or a heading "graphical abstract" within the image file.*

If you have any questions, please call or write, we will be happy to answer them.

With best regards, Helen Klimashevskia

Editorial staff of the [EUREKA: Physics and Engineering](#)

Publisher [Scientific Route OÜ](#) (page on [Linkedin](#))

WhatsApp / Viber / Telegram: +37256101470

<https://route.ee/en/journals>

**aris Ansori** <[arisansori@unesa.ac.id](mailto:arisansori@unesa.ac.id)>

Sen, 13 Mar, 07.40 (9  
hari yang lalu)

kepada Scientific, sudjitospn, denny\_w, widodoteguhdwi

Thank you for your email.

**aris Ansori** <[arisansori@unesa.ac.id](mailto:arisansori@unesa.ac.id)>


Sel, 14 Mar, 22.38 (8 hari  
yang lalu)

kepada Scientific

Dear Editor,

we have made a graphic abstract. we have sent it back via email

Thank you.  
best regards  
author

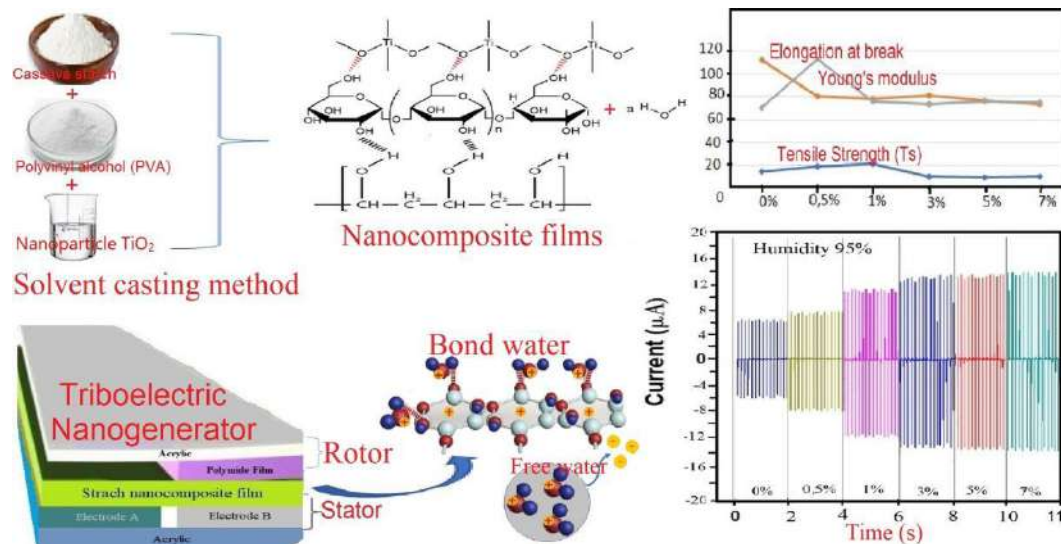

from journal «EUREKA: Physics and Engineering»  
\_№2.2023

Eksternal



Scientific Route OÜ

04.07 (3 jam  
yang lalu)

kepada saya, sudjitospn, denny\_w, widodoteguhdwi

Inggris

Indonesia

Terjemahkan pesan

Nonaktifkan untuk: Inggris

Hi, I hope you're doing okay, can you please look at the layout of your article, is everything okay?

We will send you the final layout of the article with all the data by 30.03.2023.

Have a good day to you, looking forward to hearing back.

We work 24/7 and are ready to help you around the clock!

With best regards, Helen Klimashevskaya  
Publisher [Scientific Route OÜ](#)

WhatsApp / Viber / Telegram: +37256101470

<https://route.ee/en/journals>

-----

**Attention!** The author (team of authors) submitting the manuscript to the editorial office of the journal «**EUREKA: Physics and Engineering**» agrees with all requirements for registration, submission of the manuscript of the article, and payment and be responsible in case of violation of these requirements.

**aris Ansori** <[arisansori@unesa.ac.id](mailto:arisansori@unesa.ac.id)>

06.02 (1 jam  
yang lalu)

kepada Scientific, sudjitospn, denny\_w, widodoteguhdwi

Yes, everything is fine.

**Scientific Route OÜ**

06.03 (1 jam  
yang lalu)

kepada saya, sudjitospn, denny\_w, widodoteguhdwi

Inggris

Indonesia

[Terjemahkan pesan](#)

[Nonaktifkan untuk: Inggris](#)

Great, thanks!

cp, 22 mar. 2023 г. в 01:03, aris Ansori <[arisansori@unesa.ac.id](mailto:arisansori@unesa.ac.id)>:

**aris Ansori** <arisansori@unesa.ac.id>

07.43 (7 menit  
yang lalu)

kepada Scientific, sudjitospn, denny\_w, widodoteguhdwi

You're welcome!

## Review

*The article has novelty and some interesting data. Nevertheless, the article contains flaws that have to be eliminated. For this, full proofreading for the English language has to be performed. Many sentences should be rewritten, shortened, and clarified. Subscripts in the formulas of substances have to be checked. This is because many subscripts as plain text are shown. In addition, the abstract has to be completely rewritten. The abstract of the work has to be attractive to a reader and not contain GENERAL information (highlighted by violet). The quality of the figures has to be significantly increased. In order to prove the uniform spacing of NPs, maps of the elements' distribution have to be provided.*

Flaws and mistakes are highlighted in red / red

Reviewer comments are highlighted in yellow

Sentences that raised questions are highlighted in green

Received date: 08.11.2022

Accepted date:

Section: *Materials Science*

## ENHANCED MECHANICAL AND WATER RESISTANCE PROPERTIES OF CASSAVA STARCH-PVA NANOCOMPOSITES WITH TiO<sub>2</sub> NANOFILLERS FOR TRIBOELECTRIC NANOGENERATORS FILMS

**Aris Ansori**

**Corresponding author**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str., Malang, Indonesia, 65145*

*Department of Mechanical engineering*

*Universitas Negeri Surabaya*

*Ketintang str, Surabaya, Indonesia 60231*

*arisansori@unesa.ac.id*

*ORCID: orcid.org/0000-0001-8760-5093*

**Sudjito Soeparman**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str, Malang, Indonesia, 65145*

*sudjitospn@ub.ac.id*

*ORCID: orcid.org/0000-0003-3490-7543*

**Denny Widhiyanuriyawan**

*Department of Mechanical Engineering  
Brawijaya University  
Veteran str, Malang, Indonesia, 65145  
denny\_w@ub.ac.id  
ORCID: orcid.org/0000-0001-5729-4212*

***Teguh Dwi Widodo***  
*Department of Mechanical Engineering  
Brawijaya University  
Veteran str, Malang, Indonesia, 65145  
widodoteguhdwi@ub.ac.id  
ORCID: orcid.org/0000-0002-7005-7315*

Author's order	First Name	Middle name	Last Name
1	Aris		Ansori
2	Sudjito		Soeparman
3	Denny		Widhiyanuriyawan
4	Teguh	Dwi	Widodo

## **Abstract**

The utilization of biopolymers for energy applications continues to attract researchers, due to the unique properties of biopolymers that are easily modified, such as cassava starch (CS) biopolymer which has hydroxyl molecular chains. However, the brittle, and non-waterproof nature of starch films is an obstacle to their use in triboelectric nanogenerator (TENG) solid-solid films. This study aims to improve the physicochemical properties of cassava starch films by modifying them into nanocomposite films. The nanocomposite film was made from 70:30 CS/polyvinyl alcohol (PVA) composite and variation of TiO<sub>2</sub> nanoparticles addition using solvent casting method. The results showed that the mechanical properties of cassava starch film increased with the addition of PVA. Meanwhile, the addition of TiO<sub>2</sub> above 1 wt% of the mechanical properties of the film tends to decrease. The film has low wettability properties with a contact angle of 83.6°. The performance of the nanocomposite film as a Rotary disc freestanding film (RDF-TENG) produces 4.4-fold the output voltage and 2.8-fold the current compared to the film without TiO<sub>2</sub>. This is a new finding that the CS/PVA-TiO<sub>2</sub> nanocomposite film has the potential for TENG films in high-humidity environmental conditions.

**Keywords:** nanocomposite film, TiO<sub>2</sub>, film properties, performance, the triboelectric nanogenerator

## **1. Introduction**

A triboelectric nanogenerator (TENG) is a micro/nano energy harvesting device that converts the mechanical energy of the surrounding environment into electrical energy based on the triboelectricity effect between two materials that have different

electronegativity levels and has been proven to be effective and efficient [1]. TENG working principles based on contact electrification and electrostatic induction make a self-powered system with high efficiency, low cost, abundant mechanical energy source, and high output [2, 3]. TENG was first developed by Wang et al. in 2013, The research was carried out by utilizing the triboelectric effect of materials to harvest mechanical energy into electricity and showed high energy conversion efficiency [4].

TENG has become one of the promising energy conversion devices to convert mechanical energy into electrical energy due to the capacity of triboelectric materials. The TENG device generally consists of two friction materials and electrodes at the top and bottom of the device. Physical contact between two friction materials with different levels of electronegativity can induce a triboelectric charge which can produce a potential decrease when separated by mechanical forces and increase the flow of electrons between the electrodes via an external circuit. The dominant factor that determines the performance of TENG's output is the TENG friction material, such as; the use of nanocomposite friction materials on a nanoscale which has the advantages of mechanical strength, toughness, flexibility, transparency, dielectric, thermal or electrical conductivity properties which show an effective and efficient TENG performance improvement [5, 6].

However, TENG triboelectric nanocomposite films are still dominated by synthetic polymers which require a complicated, long, and expensive fabrication process. such as; PDMS nanocomposite films with  $\text{TiO}_2$  deposition can cause changes in oxygen vacancies on the PDMS surface which can contribute to electron exchange and trapping and have an impact on increasing TENG output power [7], DSSC output power [8], Poly (vinylidene fluoride) (PVDF) polymer with  $\text{TiO}_2$  NPs as filler can improve the dielectric properties [9], Polydimethylsiloxane (PDMS) with different  $\text{TiO}_x$  weight ratios as a function of dielectric constant control with 5% rutile  $\text{TiO}_x$  and 7%  $\text{TiO}_x$  anatase phase produces TENG output highest  $\sim 180 \text{ V}/8,2 \mu\text{A}$  and  $211,6 \text{ V}/8,7 \mu\text{A}$  [10].

Biodegradable devices are in great demand because of the abundant raw materials available, low cost, simple process, and environmentally friendly. Various natural biodegradable materials, such as; natural rubber [11], cellulose [12, 13], chitosan, polyvinyl alcohol (PVA) [14], rice paper and starch paper have been used to make biodegradable TENGs [15–17], and environmentally friendly raw materials and do not cause harmful effects on humans and the environment [18]. The use of starch has begun to be developed for the TENG triboelectric film because it has properties such as; biocompatible and biodegradable [16, 19–22], abundant availability, easy process, inexpensive, possessing hydroxyl groups, amorphous crystal structure, and rheological properties can provide the required resistance for TENG triboelectric film applications [23].

Meanwhile, previous studies showed high performance of TENG based on starch biofilm, such as; TENG-based, due to the binding of water molecules and hydroxyl groups through hydrogen bonds [21]. TENG-based potato starch biofilm exhibits high output voltages from 60 mV to 300 mV per  $4 \text{ cm}^2$  area, but the surface of the film is prone to cracking at several duty cycles [22]. Tapioca starch film rich in hydroxyl groups can enhance the triboelectric effect by binding water molecules on the friction



film surface through hydrogen bonding [24]. The use of starch polymer electrolyte film made from a mixture of potato starch and 0.5%  $\text{CaCl}_2$  showed an increase in voltage output three times higher than pure starch from 0.4 V to 1.2 V. Starch polymer electrolyte between potato starch and 0.5%  $\text{CaCl}_2$  showed an increase in voltage output three times higher than pure starch from 0.4 v to 1.2 V [25].

However, the strong hydrophilicity of starch causes poor mechanical properties and easily soluble in prolonged contact with water. This becomes a bottleneck for starch films for TENG biodegradable applications that require long-term stability. Therefore, to increase the functionality of starch by modifying starch into nanocomposite films. In this study, we fabricated a starch-based nanocomposite film, by synthesizing cassava starch/PVA- $\text{TiO}_2$  into a nanocomposite film. Our knowledge, the use of  $\text{TiO}_2$  as a filler in starch composites to improve mechanical properties and water resistance for Biodegradable TENG has never been reported. Meanwhile, the addition of PVA to starch polymers as a composite matrix can help the formation of polymer composite bonds through hydrogen bonding and increase the number of hydroxyl groups. [26]. The use of  $\text{TiO}_2$  nanofiller which is an inorganic nanoparticle with a large specific surface area and high surface energy can result in some -OH groups or dangling bonds contained in the biopolymer matrix that can be adsorbed on the nano- $\text{TiO}_2$  surface, which can affect the physical characteristics of the natural polymer/composite properties. The sentence is not ended or not correct. In addition, the formation of hydrogen bonds and C-O-Ti bonds between starch matrices and  $\text{TiO}_2$  can help the dispersion of  $\text{TiO}_2$  as a filler in starch matrices which can improve the compatibility between starch and  $\text{TiO}_2$ , equally distributed?[27].

Meanwhile, the special emphasis of this study is to investigate the effect of  $\text{TiO}_2$  in CS/PVA polymer blends on mechanical properties, water resistance, and TENG characterization with CS/PVA- $\text{TiO}_2$  nanocomposite films as positive friction surfaces. We analyze the performance TENG of CS/PVA- $\text{TiO}_2$  nanocomposite films and the changes in properties of CS/PVA nanocomposite films with different concentrations of  $\text{TiO}_2$  nanofillers.

The improvement in tensile strength and elongation at break of CS/PVA composite films is due to the high mechanical properties of PVA. In addition, the water resistance property was improved with the formation of more OH groups. Meanwhile, the effect of  $\text{TiO}_2$  addition in CS/PVA composite increases the rigidity of the molecular chain with the help of hydrogen and covalent bonds, the elasticity of the molecular chain decreases which causes the elongation at break value to tend to decrease with the increase of  $\text{TiO}_2$  concentration in the CS/PVA matrix. The presence of  $\text{TiO}_2$  makes the more dense film, thus increasing the absorption of water molecules so that the film is not easily damaged.

Meanwhile, the performance of RDF-TENG nanocomposite CS/PVA film produced an output voltage and current of ~25.5 V and ~3.6  $\mu\text{A}$ . The effect of  $\text{TiO}_2$  addition on the performance of RDF-TENG film of CS/PVA- $\text{TiO}_2$  nanocomposite was optimally improved by the addition of 3%  $\text{TiO}_2$  which resulted in 4.4 times the output voltage and 2.8 times the current compared to the TENG film of CS/PVA without  $\text{TiO}_2$  nano-filler. Therefore, these CS/PVA- $\text{TiO}_2$  nanocomposite films have the potential for TENG films under high-humidity environmental conditions. This is not possible to

understand. Split the sentence.


## 2. Materials and methods

### 2. 1. Materials

Materials starch used in the experiment is cassava starch produced by PT. Budi starch & Sweetener. Tbk. in Indonesia, Polyvinyl Alcohol (PVA) with an average molecular weight of  $M_w = 89,000\text{--}98,000$ , was procured from Sigma Aldrich, Anatase  $\text{TiO}_2$  nanoparticles with a particle size of 20 nm were purchased from Sigma-Aldrich, glycerol (99% purity, clear, colorless, and density:  $1.261\text{ g/cm}^3$ ) from Merck, distilled water specification; PH 8, resistivity  $>200\text{ K}\Omega$ , conductivity  $<5\text{ }\mu\text{S/cm}$ , Copper tape type dual side conductor (adhesive side and conductive outside side) and thickness 0,5 mm.

### 2. 2. Preparation of cassava starch (CS)/PVA- $\text{TiO}_2$ nanocomposite

**Fig. 1** describes making cassava starch (CS)/PVA- $\text{TiO}_2$  nanocomposite using the solvent casting method.

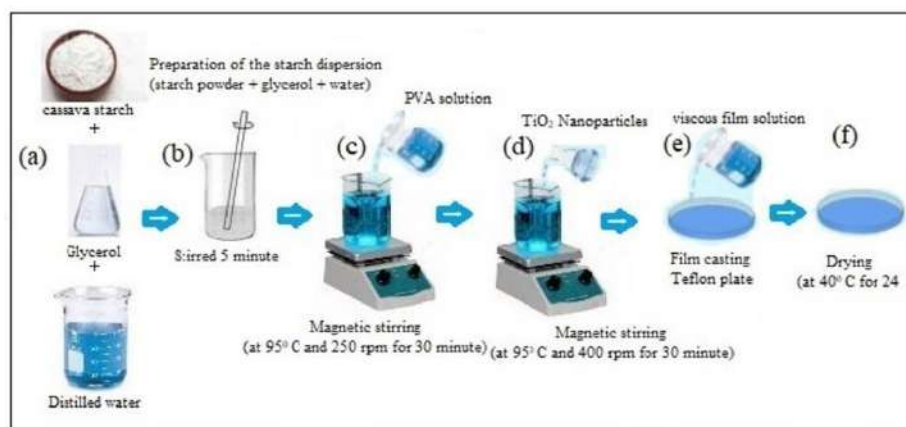

**Fig. 1.** Preparation of CS/PVA- $\text{TiO}_2$  nanocomposite films

Preparation of CS/PVA- $\text{TiO}_2$  nanocomposite films by solvent casting method as shown in **Fig. 1**. by steps; (a). making a solution of cassava starch (CS), with a composition of cassava starch (4.2 g), and glycerol (3 g) as plasticizer dispersed with distilled water (50 mL) in borosilicate glass, (b). The solution of cassava starch (CS), and glycerol was mechanically stirred for 5 minutes until the solution was completely homogeneous, (c). cassava starch solution (CS) was stirred with a magnetic stirrer at a speed of 250 rpm at a temperature of 95 °C for 30 minutes to obtain a gelatinized starch suspension and added PVA solution while stirring continuously (250 rpm) for 30 minutes until it dissolved completely and a clear solution was formed, (d). CS/PVA clear solution was added with  $\text{TiO}_2$  nanoparticles (0.5, 1, 3, 5, 7 % wt), (e). CS/PVA- $\text{TiO}_2$  nanocomposite films were cast with a Teflon mold diameter of 100 mm. I can't understand, (f). The drying of the film was carried out in a hot air oven at 40 °C for 24 hours. Meanwhile, the composition ratio of Cassava starch (CS), PVA, and  $\text{TiO}_2$  for nanocomposite film samples are presented in **Table 1**.

**Table 1**

Composition of The Various Film Nanocomposite Samples

Nanocomposite Sample	Composition		
	Cassava strach (CS)	PVA	TiO <sub>2</sub> ( % wt)
CS-PVA	70	30	0
CS-PVA/0,5 TiO <sub>2</sub> wt%	70	30	0,5
CS-PVA/1 TiO <sub>2</sub> wt%	70	30	1
CS-PVA/3 TiO <sub>2</sub> wt%	70	30	3
CS-PVA/5 TiO <sub>2</sub> wt%	70	30	5
CS-PVA/7 TiO <sub>2</sub> wt%	70	30	7


First, to determine the constant weight ratio of the CS/PVA mixture (70:30), cassava starch (4.2 g) was dispersed with distilled water (50 mL) in borosilicate glass, the addition of glycerol (3 g) served as a plasticizer and mechanical stirring was carried out until completely homogeneous. Furthermore, stirring with a magnetic stirrer at 250 rpm at a temperature of 95 °C for 30 minutes to obtain a gelatinized starch suspension. Meanwhile, in another borosilicate glass, the PVA solution was prepared by dissolving 1,8 g of PVA with 40 mL of distilled water and mechanically stirring (250 rpm) for 5 minutes, then the temperature was gradually increased to 95 °C and continuously stirred (250 rpm) for 30 minutes until completely dissolved and a clear solution is formed. Mixing of the two solutions (gelatinized CS suspension- PVA suspension) was carried out at room temperature and continued to be stirred with a magnetic stirrer (250 rpm, 95 °C).

Furthermore, the PVA solution, cassava starch suspension, and TiO<sub>2</sub> (0,5%, 1%, 3 %, 5%, and 7% wt) (**Table 1**) particle dispersion (CS/PVA-TiO<sub>2</sub>) were combined and stirred continuously at 400 rpm and a temperature of 95 °C for 30 minutes using a magnetic stirrer. The solution was in a vacuum for 10 minutes using vacuum machine to remove residual air from the solution. The viscous solution produced from the CS/PVA-TiO<sub>2</sub> polymer was poured into a Teflon mold (radius 50 mm). when pouring, the volume of the polymer mixture in each mold was controlled constant, producing relatively the same thickness as the nanocomposite film sample. The drying of the film was carried out in a hot air oven at 40 °C for 24 hours. The dry film was then carefully peeled off from the Teflon mold and produced a film with an average thickness of 100 µm. The resulting nanocomposite films were kept in a zippered bag until tests were carried out to reduce water absorption according to the Ramirez method [28].

### 2. 3. Fabrication of Rotary Disk Freestanding (RDF-TENG)

The TENG structure uses Rotary-disk freestanding triboelectric nanogenerator (RDF-TENG) mode. The TENG structure uses Rotary-disk freestanding (RDF-TENG) mode. The rotary disk freestanding TENG (RDF-TENG) structure consists of two parts, rotor and stator. Rotor structure parameters with the number of film segments ( $n$ ) = 4, outer radius ( $r_2$ ) = 50 mm, inner radius ( $r_1$ ) = 5 mm, and made of commercial polyimide thin film (0.03 mm) as a triboelectric film glued to an acrylic surface (radius = 50 mm). Meanwhile, the stator structure parameters consisting of CS-PVA/TiO<sub>2</sub> nanocomposite films were cut to form an equal interval electrode model with the

number of film segments ( $n$ ) = 8, outer radius ( $r_2$ ) = 50 mm, inner radius ( $r_1$ ) = 5 mm, and the nanocomposite film thickness was 100  $\mu\text{m}$ . Next, the cut nanocomposite film was glued to the copper foil (electrode film A, and B). Where the tip of the copper foil electrode is slightly exaggerated to connect the external circuit with the help of a conducting wire so that electrons can flow into the external circuit. External mechanical energy uses a DC electric motor that is connected to the TENG rotor shaft in a freestanding rotational mode. Meanwhile, the gap between the rotor and stator was controlled with a distance of 0,10 mm to keep the friction between the surface of the polyimide film and the CS/PVA-TiO<sub>2</sub> nanocomposite film stable. The design and structure of RDF-TENG with cassava starch/PVA-TiO<sub>2</sub> nanocomposite films are presented in **Fig. 2**.

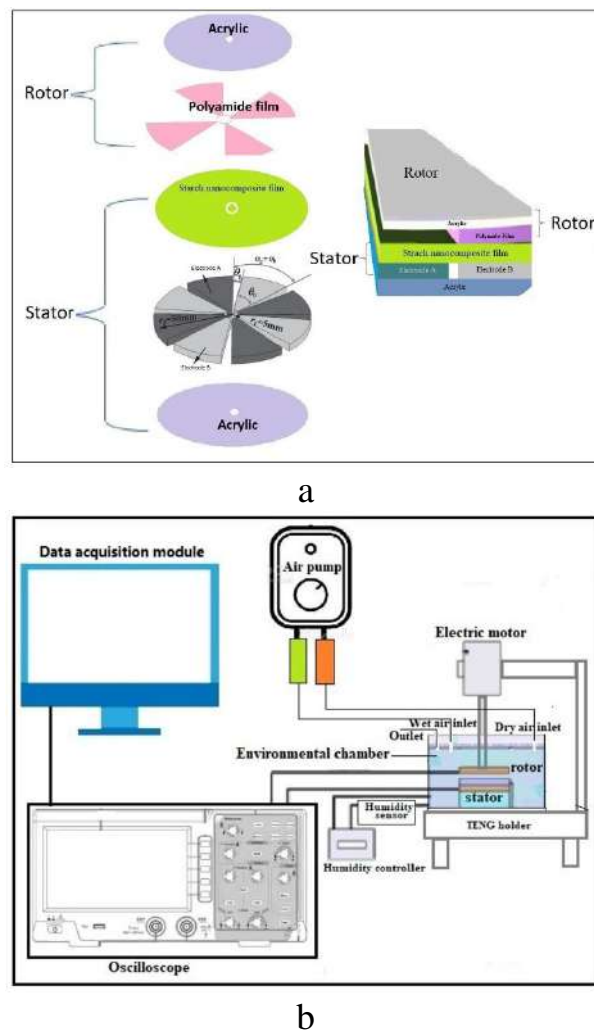

**Fig. 2.** RDF-TENG testing and structure: a - RDF TENG array, b- TENG testing instrument

Low quality of the figure.

## 2. 4. Characterizations of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films

### 2. 4. 1. Chemical, structural, and morphological analysis

Surface analysis and morphology of starch/PVA-TiO<sub>2</sub> nanocomposite films using Scanning Electron Microscope (FESEM) FEI Quanta FEG 650. The dry film sample

was sprayed with gold-palladium under vacuum conditions to increase its conductivity. The test was carried out at a voltage of 15xKV with a magnification of 500x, and 10Kx. The functional groups of the nanocomposite films were analyzed using Fourier transform infrared spectroscopy (FTIR) with an IRPrestige-21 spectrophotometer (Shimadzu, USA). FTIR measurements were carried out at room temperature ( $25 \pm 10$  °C) in the wave number range of  $600\text{--}4000\text{ cm}^{-1}$  with a resolution of  $2\text{ cm}^{-1}$  and an average of more than 32 scans. The X-ray diffraction (XRD) analysis to determine the crystalline atom form of starch/PVA-TiO<sub>2</sub>. The degree of crystallinity of the film samples was recorded using a PAN analytical Xpert Pro diffractometer with Cu K $\alpha$  radiation at 40kV and 40 mA, using a 20 mm Ni filter. All sample films were scanned between  $2\theta = 5^\circ$  to  $69.99^\circ$  at  $5^\circ/\text{min}$  measurement Temperature of  $25^\circ\text{C}$ . Split the sentence

## **2. 4. 2. Mechanical properties**

Testing the mechanical properties of the film consists of tensile strength (Ts), Elongation at break (Eb), and Young's Modulus (My). Testing according to the ASTM standard method D882-10 (ASTM, 2010) using the Tensile Testing Machine. The samples film (length  $\times$  width  $\times$  thickness =  $100\text{ mm} \times 20\text{ mm} \times 5\text{ mm}$ ) conditioned at RH = 55% for 48 hours. Next, each film sample was mounted between the machine's grips and tested at a crosshead speed of  $5\text{ mm}/\text{min}$  at room temperature ( $23^\circ\text{C}$ ) [29].

## **2. 4. 3. Water-resistance**

Water resistance testing was conducted to identify the degree of water damage to the film. The film samples (length  $\times$  width  $\times$  thickness =  $100\text{ mm} \times 20\text{ mm} \times 0.5\text{ mm}$ ) were immersed into beakers filled with distilled water. The immersion time of each film sample until the film texture was damaged (destroyed) in the water. The results of recording the immersion time of the film sample were used to determine the level of resistance of the film sample to water. And? Where is immersing time, other procedures, and result analysis?

## **2. 4. 4. Water contact angle**

Measurement of the contact angle of the nanocomposite film was carried out to determine the level of wettability of the film surface to water. The sample contact angle was measured using a contact angle goniometer (Rame-Hart Instrument C, USA). The film sample (length  $\times$  width  $\times$  thickness =  $25\text{ mm} \times 25\text{ mm} \times 0.5\text{ mm}$ ) was placed horizontally on the contact angle measuring bench by the sessile drop method [30]. Drops of  $4\text{ }\mu\text{L}$  deionized water were placed on the film's top surface. droplet images and contact angle values are recorded from the software 20 seconds after deposition. The contact angle is calculated using a mathematical equation with the shape of a water droplet and calculates the tangent line between the water droplet and the solid film. For each film sample, 5 readings were taken at different film locations.

## **2. 4. 5. Electrical output measurement**

TENG output performance measurement using freestanding rotary mode. The rotating mechanical energy of the DC motor is used to rotate the TENG rotor. To



measure the TENG output voltage and current, the TENG rotor is energized externally from by the DC motor rotation. The rotation is controlled at 200 rpm using a controller that regulates the electric current entering the DC electric motor. What was the speed? How it was controlled?. The rotation of the rotor on the stator causes friction on the surface of the polyimide film and the CS-PVA/TiO<sub>2</sub> nanocomposite film causing a triboelectricity effect. The electrode poles of films A and B were measured output voltage and current using a digital oscilloscope (DSOX6004A Digital Storage Oscilloscope) with a load resistance of 100 MΩ. Meanwhile, the TENG output performance test based on CS-PVA/TiO<sub>2</sub> nanocomposite films under different humidity conditions was carried out in a cylindrical chamber, before the testing film was put in a closed box for 24 hours with adjusted humidity control (RH 15%, and 95%) with a saturated salt solution. Furthermore, testing the output performance of TENG in the same humidity control box was carried out in a closed cylindrical chamber, a cylindrical chamber equipped with two inlets and one outlet. Where the first inlet drains dry air (located on the right), and the second inlet drains moist air (located on the left). Meanwhile, the outlet is used to control air circulation in the cylinder (located on the left). This control mode can accurately achieve the required relative humidity in the room.

### **3. Results and discussion**

#### **3. 1. Chemical, structural, and morphological analysis of the cassava starch-PVA/TiO<sub>2</sub> nanocomposite film**


Structural analysis can be observed from the FTIR spectrum of the material in the range of 4000–700 cm<sup>-1</sup>. Where the molecular bond spectra of the CS/PVA polymer matrix and the change after incorporation of TiO<sub>2</sub> filler which has several characteristic peaks reflect the structure of the two biopolymers. The transmittance band of about 3285 cm<sup>-1</sup> was determined from the stretching vibration of the hydroxyl group (–OH) in CS and PVA polymers having a hydroxyl-rich average. The peak transmittance band of 1641.42 cm<sup>-1</sup> indicates the formation of hydrogen bonds in pure starch due to the flexion of the –OH molecule and shows the hygroscopic nature of the starch polymer. Characteristics of the bending of C–OH in the 1205 cm<sup>-1</sup> transmittance band. The peak at 770 – 1120 cm<sup>-1</sup> is associated with the stretching of the C–O bond of the macromolecular portion, where an intramolecular hydrogen bond is formed between two adjacent OH groups that are on the same side of the plane of the C–C carbon chain of the C–O–C group of the unit. glucose in starch [31].

Pure PVA showed hydroxyl and acetate groups, where the intermolecular and intramolecular hydrogen –OH bonds were shown in a wider band at 3296.35 cm<sup>-1</sup>.

The structure of the alkaline group confirmed the peak in the transmission band 1480 – 1190 cm<sup>-1</sup> associated with the planar buckling vibrations of C–H and O–H in both CS and PVA. The presence of a carbonyl group (C=O) is indicated by the 1732 cm<sup>-1</sup> transmission band and a hydrocarbon (alkane) group in PVA is indicated by a peak at 1373.32 cm<sup>-1</sup> [32]. Meanwhile, the chemical interaction between CS/PVA polymer molecules that causes changes in the characteristic spectral peaks of the composite, the C–OH hydrocarbon group is estimated to come from the C–O vibrations, which is confirmed by the peak of 1000–1250 cm<sup>-1</sup>. In addition, the vibration of the –

OH group confirmed the absorption peak in the range of 3300-3000  $\text{cm}^{-1}$ . The formation of the C-H alkene functional group due to the mixing of CS/PVA which was confirmed at a wavelength of 675-995  $\text{cm}^{-1}$  and C-H alkane which was confirmed at a wavelength of 2850-2970  $\text{cm}^{-1}$ .


In addition, the C-H functional group of the aromatic ring was confirmed at the wavelength of 690–900  $\text{cm}^{-1}$ . The mixing of CS/PVA polymer showed flexural vibrations of the hydrogen bonding of the –OH group at 1710.86  $\text{cm}^{-1}$  and the C–O strain at 1050-1300  $\text{cm}^{-1}$ . The stronger interaction of CS/PVA molecules is shown by intermolecular interactions through the formation of hydrogen bonds with water vapor molecules which can increase triboelectricity. At low concentrations (below 7 %  $\text{TiO}_2$  wt) in the CS/PVA polymer mixture in the FTIR spectrum, the vibration peaks did not show any additional peaks. This may be due to the overlapping bands of the CS/PVA components. However, the increase in  $\text{TiO}_2$  concentration (above 1%  $\text{TiO}_2$  wt) showed a slight shift in the peak positions of several bands in the range of 900-1100  $\text{cm}^{-1}$ . It is assumed that the absorption band at 1000  $\text{cm}^{-1}$  is associated with the  $\text{TiO}_2$  crystal domains hydrated into the CS/PVA polymer matrix. In addition, the titanium ions of the  $\text{TiO}_2$  particles can interact with the hydroxyl groups of CS/PVA, which make the nanocomposite films highly compatible. The results of the FTIR test for each concentration of  $\text{TiO}_2$  nanofiller in the cassava starch/PVA composite are presented in **Fig. 3**.

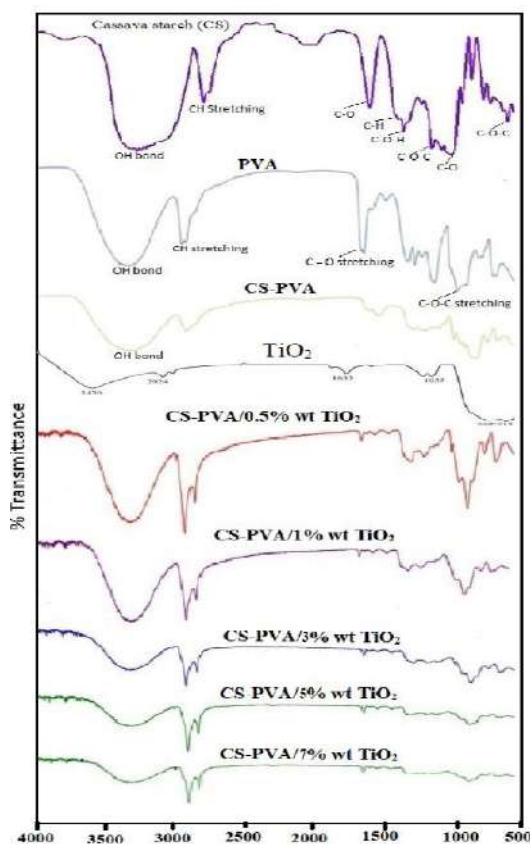

**Fig. 3.** Chemical formula analysis of cassava starch/PVA- $\text{TiO}_2$

The results of the XRD test for each concentration of  $\text{TiO}_2$  nanofiller in the cassava starch/PVA nanocomposite are presented in **Fig. 4**. Shows the XRD pattern of

the sample film, the cassava starch film produced peaks at  $2\theta = 15.73^\circ, 16.51^\circ, 17.23^\circ, 19.69^\circ, 22.14^\circ,$  and  $24.37^\circ$ . Whereas, an important diffraction peak located at  $19.69^\circ$  which indicates strong intermolecular and intramolecular hydrogen bonds, and is indicative of a semi-crystalline structure, this is not much different from the signal of the  $20^\circ$  peaks of cassava starch [33]. Meanwhile, the CS-PVA composite sample formulation produced peaks at  $2\theta = 13.11^\circ, 17.21^\circ, 19.76^\circ,$  and  $24.54^\circ$ , which indicated a change in peak. These peaks can reveal that polymer cassava starch (CS) is dispersed in PVA which can change the characterization of the films [34-35]. The incorporation of  $\text{TiO}_2$  filler into CS/PVA with variations in  $\text{TiO}_2$  concentration below 1% wt showed peak changes that were not easily visible at low concentrations. However, increasing the concentration above 1% by weight showed peaks at  $2\theta = 22.38^\circ, 27.60^\circ,$  and  $54.43^\circ$  in semicrystalline structure nanocomposite films and indicated the presence of titanium dioxide embedded in the CS/PVA polymer.

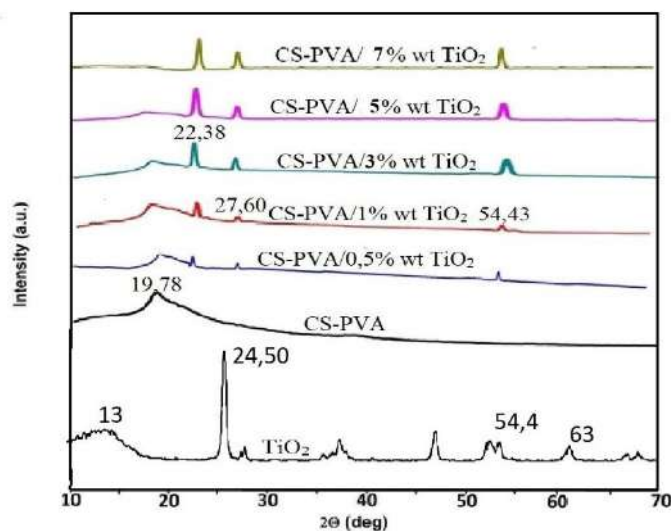


**Fig. 4.** XRD patterns for  $\text{TiO}_2$  nanoparticle, CS/PVA, and CS/PVA- $\text{TiO}_2$  nanocomposite. Why is not represented a pure  $\text{TiO}_2$  recorded spectrum?

The morphology of the polymer mixture of cassava starch (CS)/PVA and the morphological changes of the nanocomposite films after the addition of  $\text{TiO}_2$  can be observed from the material micrograph. The ability of starch granules to interact with various ceramic and mineral particles can hold these particles, which causes the added  $\text{TiO}_2$  to adhere to the surface of the starch granules well. Meanwhile, mixing CS/PVA suspension with  $\text{TiO}_2$  particles, during the gelatinization process, the  $\text{TiO}_2$  particles remain attached to the surface of the starch granules and interact with the continuous phase macromolecules of water-soluble amylose and PVA, this process most likely occurs through hydrogen bonding. SEM results show that morphologically the resulting film has a heterogeneous surface relief. In the CS/PVA nanocomposite film, the addition of  $\text{TiO}_2$  nanoparticles that have a large specific surface area and high surface energy as a filler material for polymer composites can cause some -OH groups or dangling bonds contained in the biopolymer matrix to be adsorbed on the nano- $\text{TiO}_2$  surface. The nature of  $\text{TiO}_2$  can help the distribution of  $\text{TiO}_2$  particles more evenly in the CS / PVA composite matrix which has many hydroxyl groups. this is also evident



from the results of SEM photos of 10Kx magnification visible TiO<sub>2</sub> nanoparticles can spread even though there are still some points clumping, the possibility of clumping at some point occurs when the stirring process is less evenly distributed. This can be seen from the sample of the film with a low concentration of TiO<sub>2</sub> (0,5% wt), the filler particles are still individual. Whereas, this is in contrast with the addition of TiO<sub>2</sub> concentration of more than 1% wt indicating the association of filler particles in the composite. In addition, the presence of TiO<sub>2</sub> particles with a high ratio in the film can create a winding path that prolongs the transport of water vapor molecules. The results of surface morphology photographs of cassava starch/PVA nanocomposite films with different concentrations of TiO<sub>2</sub> nanofiller are presented in **Fig. 5**.

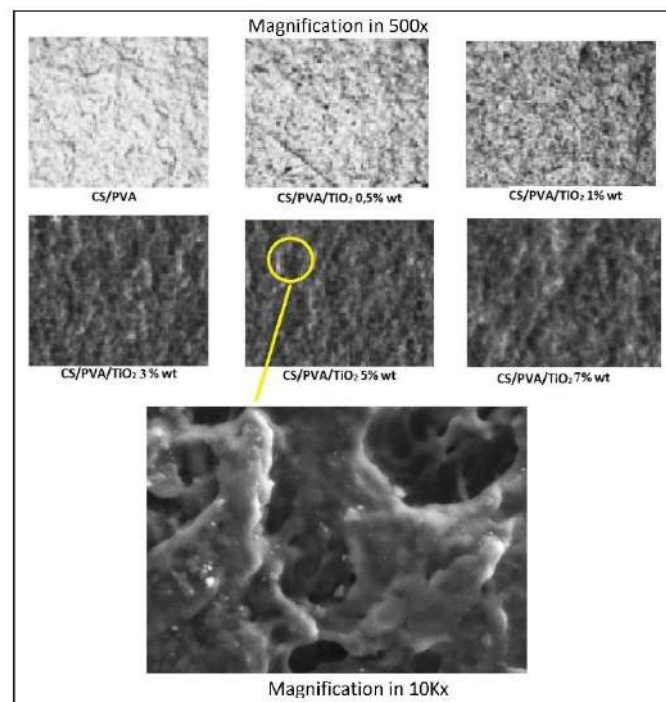

**Fig. 5.** Morphology surface of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films

1. Bad quality of SEM.
2. The authors use the next statement “the TiO<sub>2</sub> filler particles were evenly distributed within the polymer matrix” based on SEM images. Nevertheless, it is not possible to see it with the current quality. Even more, the size of TiO<sub>2</sub> particles in 20 nm and magnification in 500x does not allow for analyzing the uniform of distribution.
3. In the reviewer’s thinking as proof of the statement, the elements distribution maps have to be provided.

### 3. 2. Mechanical properties

To analyze the performance of CS/PVA-TiO<sub>2</sub> nanocomposite films related to mechanical viability, tests were carried out which included; Tensile Strength (T<sub>s</sub>) is the maximum tensile stress that the material can sustain before failure, Young's modulus (M<sub>y</sub>) is the level of elasticity of the material under longitudinal traction, and elongation at break point (E<sub>B</sub>) is a measure of the elasticity of the material. The results of the study


of mechanical properties (**Table 2**) show that the tensile properties of the CS/PVA composite film are very good with 14.23 MPa and elongation at break point of 112.13%. The mechanical properties of CS/PVA composites are good due to the high mechanical properties of PVA due to the flexible C–C and a large number of –OH groups. In addition, the interaction of the –OH group of both CS and PVA polymers through hydrogen bonds makes good compatibility between CS and PVA polymers. So far, the results of previous studies reported that decreasing the concentration of PVA polymer in starch/PVA composites decreased the mechanical properties of the films [36, 37]. Meanwhile, the incorporation of TiO<sub>2</sub> particles into the CS/PVA composite showed a significant increase in the Tensile Strength value for the CS/PVA/TiO<sub>2</sub> film sample – 0.5 wt% increased from 14.23 MPa to 19.11 MPa. While the addition of TiO<sub>2</sub> – 1 wt% showed the optimal Tensile Strength of 21.20 MPa. However, the effect of TiO<sub>2</sub> on the CS/PVA composite caused the elongation at break value of the CS/PVA-TiO<sub>2</sub> nanocomposite to decrease. On the other hand, the addition of TiO<sub>2</sub> nanoparticles above 3 wt% shows that the Tensile Strength tends to decrease and the elongation at break tends to decrease. The possibility of adding more than 3 wt% of nanoparticles causes TiO<sub>2</sub> particles to agglomerate and spread unevenly. where these results are in line with research reported by previous researchers [31, 38]. besides, the concentration of filler material can increase the adhesion strength of the material [39-40]. The improvement of mechanical properties of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films was in line with previous studies using a variety of fillers on starch/glycerol/Li composite films [41], and starch-sisal fiber [42]. In addition to fillers, the effect of using glycerol also has an impact on the properties of elongation at the break [43, 44], dan Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties [45–49]. The results of testing the mechanical properties of the film with variations in the percentage of TiO<sub>2</sub> content were 0.5%, 1 %, 3 %, 5 %, and 7 % are presented in **Table 2**.

**Table 2**

**Mechanical Characterization of Nanocomposite Film**

In the table, it is seen certain dependencies between X (TiO<sub>2</sub> quantity) vs Y (Mechanical property). It will be much better if the authors show them as plots.


Composite Sample	Mechanical Characterization		
	Ultimate Tensile Strength (Ts), MPa	Elongation at break (Eb), %	Young's Modulus (My), MPa
CS-PVA	14.23±2.25	112.13±2.28	70.27±4.12
CS-PVA/0,5 TiO <sub>2</sub> wt%	19.11±1.35	80.45±9.25	113.38±4.57
CS-PVA/1 TiO <sub>2</sub> wt%	21.20±2.52	78.20±17.12	75.45±6.59
CS-PVA/3 TiO <sub>2</sub> wt%	10.13±1.26	81.43±4.22	73.27±8.53
CS-PVA/5 TiO <sub>2</sub> wt%	9.27±1.60	76.23±2.55	75.83±8.12
CS-PVA/7 TiO <sub>2</sub> wt%	9.50±1.75	73.23±15.54	74.76±9.35

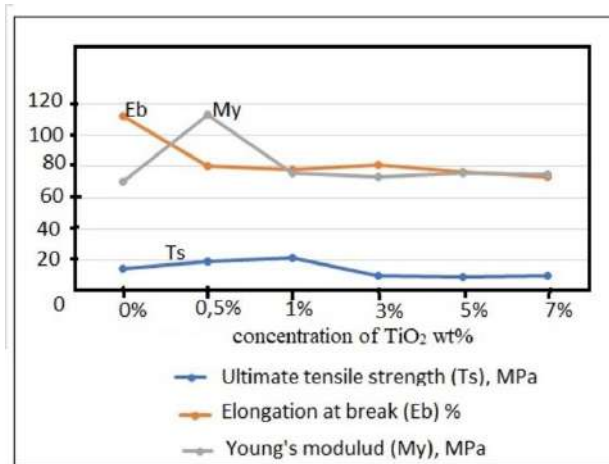

**Fig. 6.** Comparison of Ts, Eb, and My values of CS/PVA-TiO<sub>2</sub> nanocomposite films due to different concentrations of TiO<sub>2</sub>

### 3. 3. Water-resistance of CS/PVA-TiO<sub>2</sub> nanocomposite films

The water resistance test of CS/PVA-TiO<sub>2</sub> nanocomposite films aims to determine the degree of film damage when interacting with water molecules. The test method and results of water-resistance testing of nanocomposite films are presented in **Fig. 7**. To determine the water resistance of CS/PVA-TiO<sub>2</sub> nanocomposite films, it was carried out by immersing the nanocomposite films in cylindrical beaker filled with distilled water. Dimensions of the film tested L x w x h (30 x 20 x 0.01 mm). The immersion film was carried out until the film texture was damaged and crushed, as presented in (**Fig. 7, a**). The water resistance test results of the films are presented (**Fig. 7, b**), the water resistance of CS/PVA nanocomposite films with TiO<sub>2</sub> nanofiller increased 2-fold compared to that without TiO<sub>2</sub>. where, the water resistance of the CS film for 17 hours, CS/PVA increased for 20 hours, and the optimal water resistance of the SC/PVA-TiO<sub>2</sub> nanocomposite film for 32 hours with the addition of 7% by weight of TiO<sub>2</sub>. Split the sentence. The resistance of CS films is influenced by the number of hydroxyl groups in the polymer molecule, where the hydroxyl groups bind to water molecules by forming hydrogen bonds. The increase in the number of hydroxyl groups in the CS/PVA film can occur from the intramolecular interaction of the CS/PVA polymer mixture, which can significantly increase the binding of water molecules. Meanwhile, the waterproof properties of CS/PVA-TiO<sub>2</sub> nanocomposite films can be due to the influence of hydroxyl groups that bind water molecules through hydrogen bonds. In addition, the presence of TiO<sub>2</sub> in the CS/PVA polymer mixture makes the film denser, thereby increasing the absorption capacity of water molecules. On the other hand, TiO<sub>2</sub> also has hydrophobic properties which can slow down the absorption of water molecules on the surface film. This result is not much different from the results of previous research reports, the effect of TiO<sub>2</sub> nanofiller in polymer films causes a decrease in moisture penetration of corn starch/PVA-TiO<sub>2</sub> films [38], Potato Starch/Montmorillonite-TiO<sub>2</sub> composite films [31], Potato starch/lactucin-TiO<sub>2</sub> composite films [46].

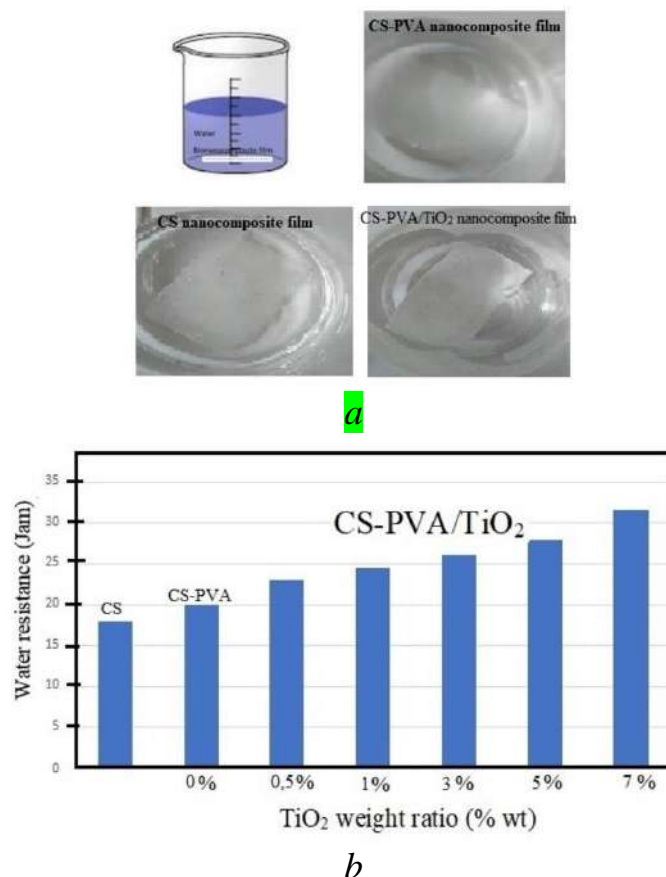


**Fig. 7.** Methods and analysis of water resistance: *a* – film testing method; *b* – results of water resistance testing of CS/PVA-TiO<sub>2</sub> nanocomposite films  
Figure 6a has a bad quality.

### 3. 4. Water contact angle

Water contact angle measurements were carried out to evaluate the wettability of the surface of the film against water molecules. This is general information. It has to be deleted to prevent wasting the time of a reader. The CS/PVA composite film sample yielded a value of 69,9° indicating hydrophilic properties.

The hydrophilic properties increased due to the increase in polar groups such as C—O and —OH due to the mixing of PVA polymer with water-soluble properties. This increase in the -OH group increases the ability to form hydrogen bonds with water molecules resulting in higher wettability. The decrease in the water contact angle on the surface of the starch/PVA film was in line with previous studies which was caused by an increase in the hydroxyl chains [34, 37, 38]. Meanwhile, the addition of TiO<sub>2</sub> to the CS/PVA composite with the addition of 0.5 wt% to 7 wt% TiO<sub>2</sub> nanoparticles showed a trend of increasing the contact angle of the film surface (70.8°, 71.1°, 74.3°, 77.5°, 83.6°) (Fig.8). The increase in contact angle was due to the distribution of TiO<sub>2</sub> particles on the surface of the CS/PVA-TiO<sub>2</sub> nanocomposite films. The increase in the coarser surface structure of the film is the basis for increasing the hydrophobicity of the film. where, the results of this study are in line with previously reported studies [48, 49]. Rewrite the sentence.

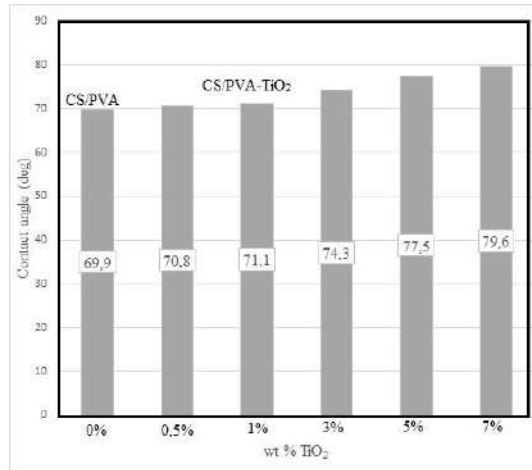

**Fig. 8.** The water contact angle of CS/PVA nanocomposite film vs CS/PVA-TiO<sub>2</sub> nanocomposite film


### 3. 5. Performance TENG of CS/PVA-TiO<sub>2</sub> nanocomposite films

The schematic diagram of the TENG output test mechanism is shown in **Fig. 9**. Conditioning for humidity levels of 15% and 95% were carried out by placing the TENG in a closed cylindrical chamber. The operating Rotary-disk freestanding (RDF-TENG) mode consists of a rotor with four electret sectors attached to a dielectric substrate using a polyimide film. The stator is composed of six sectors of a CS-PVA/TiO<sub>2</sub> nanocomposite film connected to a copper foil electrode. Distance between the rotor and stator surfaces with an air gap of 0.10 mm. This part as well as figure 8 have to be removed to **2. Materials and methods** section.

The TENG current output mechanism can be divided into three stages (**Fig. 9**). In the first stage, at the initial position, the electrode A is parallel to the electret. In the second stage, the electret rotates the position of electrode A and electrode B parallel to the electret causes the charge on electrode A to be transferred to electrode B through an external load (resistor) and generate current and voltage across the load resistor during this working period. The third stage is the final state where electrode B is parallel to the electret. While the TENG output circuit uses a rectifier diode and a capacitor as electrical storage to convert AC to DC before being channeled to the ED load. Figure 2 has to be modified: figure 2c has to be presented here as figure 9. Next figures have to be shifted in numeration.

TENG performance measurements (**Fig. 9**) were carried out at different humidity levels (15%, and 95%), the rotor rotation speed was controlled stable ( $\omega = 200$  rad/s), and the load was 50M $\Omega$ . TENG output performance test with CS-PVA triboelectric film without TiO<sub>2</sub> at low humidity level (RH, 15%), as shown in (**Fig. 10**). The results of the output voltage and current output voltage and current ~25.5 V and ~3.6  $\mu$ A without addition of TiO<sub>2</sub> in CS-PVA nanocomposite matrix, are presented in (**Fig. 10, a, b**). Meanwhile, the addition of TiO<sub>2</sub> in the weight ratio (0% to 7 % wt TiO<sub>2</sub>) showed a linear increase in voltage and current, respectively, as shown in (**Fig. 10, a, b**). The optimal output voltage and current were achieved at a concentration of 3%wt TiO<sub>2</sub> with a value of 112.5 V and 10.2  $\mu$ A. This increase in output voltage and current is due to

an increase in the value of the dielectric constant due to the presence of  $\text{TiO}_2$  in the CS-PVA polymer mixture which can increase the triboelectric of the film. These results show similarities with some of the results of previous research reports, such as; an increase in dielectric properties of Poly (Vinylidene Fluoride) film with  $\text{TiO}_2$  NP deposition [9],  $\text{TiO}_2$  doping on Portland Cement [46], Dielectric constant changes linearly as a function of weight ratio of PDMS embedded  $\text{TiO}_x$  NP [10], natural rubber (NR)- $\text{TiO}_2$  [11].

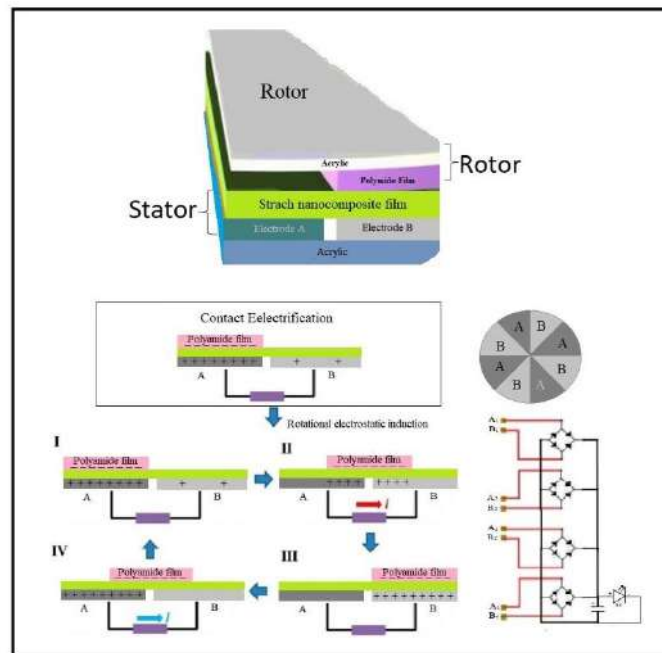


**Fig. 9.** Measurement of rotary disc freestanding TENG (RDF-TENG) with electrode components A, and B using copper tape thickness 1 mm, and electronic components (bridge diode 1A 500V), electrolytic capacitor 1000uF 16V, Light Emitting Diode lamp voltage 12 v). What electronic components' parameters were used (diode bridges, capacitor, LED?)


In addition, the effect of differences in relative humidity factors (RH, 15%, and 95%) on the output performance of CS/PVA- $\text{TiO}_2$  film-based TENG at a weight ratio above 3 %  $\text{TiO}_2$  shows that the resulting voltage and current increase are directly correlated with increased humidity levels (**Fig. 10**). The output performance of TENG when the relative humidity condition 15% showed an output voltage  $\sim 112.5$  V and current  $\sim 10.2$   $\mu\text{A}$  (**Fig. 10, a, b**). Enhanced relative humidity of the cylinder chamber is carried out by continuously injecting wet air into the closed cylinder chamber to increase the humidity 95% (as shown in **Fig. 9**). Under conditions of relatively high humidity (95%), TENG can produce  $\sim 180$  V and current from  $\sim 13.7$   $\mu\text{A}$ . However, the TENG output voltage and current increase was lower at a  $\text{TiO}_2$  weight ratio of less than 3 %, as shown in (**Fig. 11**). Meanwhile, the increase in TENG optimal output voltage and current when humidity is high (RH, 95%) with a concentration of 7%  $\text{TiO}_2$  wt can reach 1.6-fold from  $\sim 112.5$  V to  $\sim 180$  V, and the current increases 1.4-fold from  $\sim 10.2$   $\mu\text{A}$  to  $\sim 13.7$   $\mu\text{A}$  (**Fig. 10**), and (**Fig. 11**). The output voltage and current of RDF-TENG



when the humidity is 15% are presented in **Fig. 10**, and the humidity is 95% are presented in **Fig. 11**.

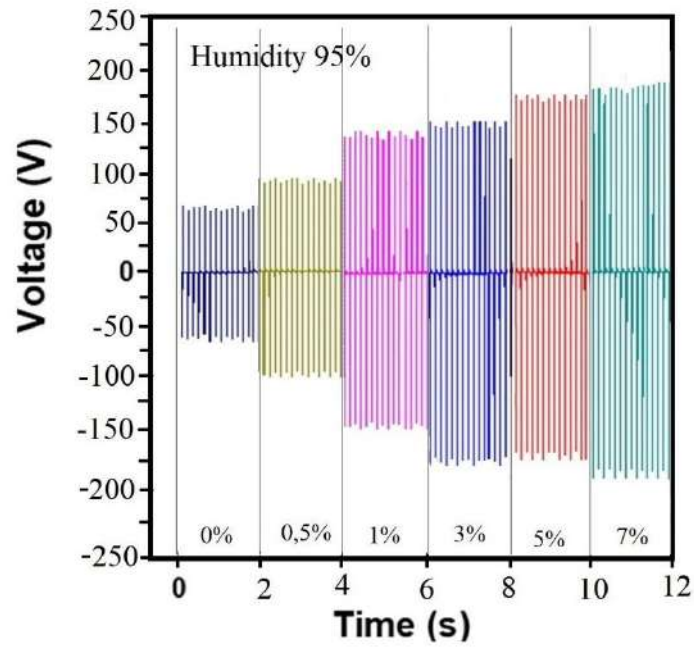


*a*

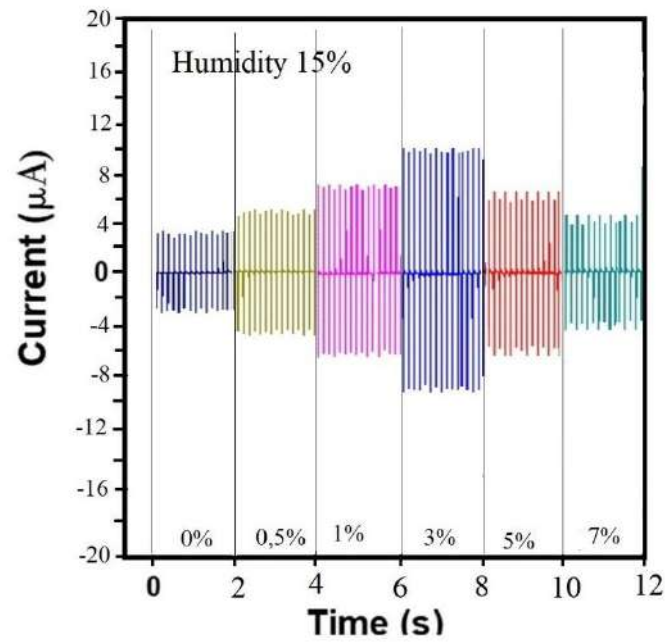


*b*

**Fig. 10.** Performance RDF-TENG at humidity 15%: *a* – open circuit output voltage ( $V_{oc}$ ); *b* – closed circuit output current ( $I_{sc}$ )

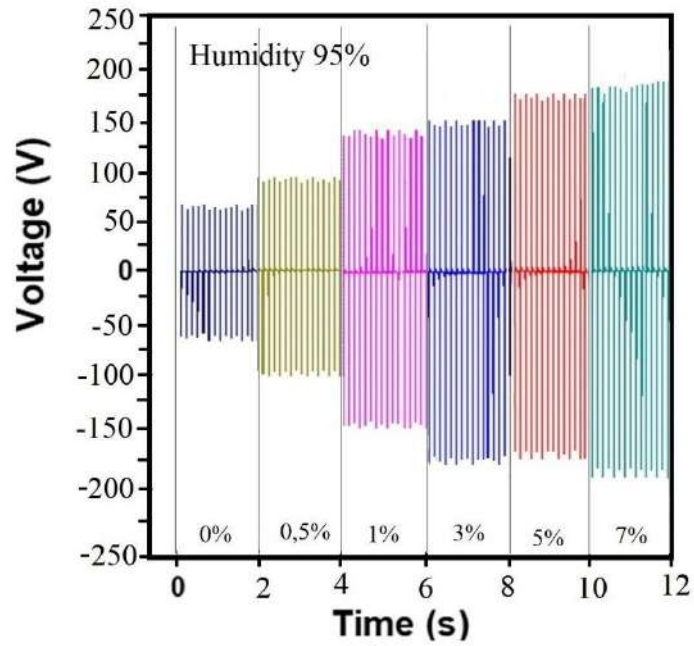

*a*

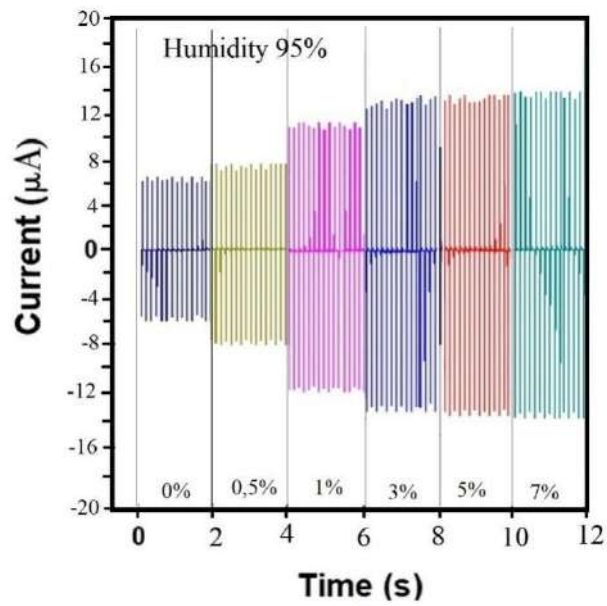

*b*

*b*

**Fig. 11.** Performance RDF-TENG at humidity 95 %: *a* – open circuit output voltage ( $V_{oc}$ ); *b* – closed circuit output current ( $I_{sc}$ )

The increase in RDF-TENG output voltage and current is caused by the formation of hydrogen bonds between hydroxyl groups and water molecules (when humidity is high) on the surface of the CS-PVA/TiO<sub>2</sub> nanocomposite film increasing the positive triboelectrification properties of the film. This is not much different from the research reported by Wang et al. using starch polymers rich in hydroxyl groups with the formation of hydrogen bonds with water molecules when humidity is high can increase



the output current of RDF-TENG based starch films [50]. PVA film is rich in hydroxyl chains and can increase the number of hydroxyl chains when mixed with starch molecules. In this case, it can bind more water molecules when the humidity is high and increase participation in triboelectric charging. The results of this study are also in line with previous studies using hydroxyl-rich biofilms, at high humidity of 95% a water molecule bonds with the hydroxyl through hydrogen bonds which increases the generation of charge when the two films rub together and increases RDF-TENG work [51].

#### 4. Conclusions

We developed a cassava starch (CS)/PVA-TiO<sub>2</sub> nanocomposite film using the solvent casting method for the application of the RDF-TENG triboelectric film. The addition of TiO<sub>2</sub> to the CS/PVA polymer composite from the SEM and XRD tests showed that the TiO<sub>2</sub> nanoparticles were evenly incorporated into the CS/PVA polymer matrix, and affected the crystal structure of the film. In addition, the presence of TiO<sub>2</sub> nanoparticles in the CS/PVA polymer resulted in an increase in Tensile Strength of 19.11 Mpa for a 0.5% wt TiO<sub>2</sub> sample, and an optimal Tensile Strength of 21.20 MPa with a concentration of 1% wt TiO<sub>2</sub> but the elongation at break value of the nanocomposite film CS/PVA-TiO<sub>2</sub> decreased. In addition, the effect of TiO<sub>2</sub> particles increases water resistance and decreases water wettability with an increase in the water contact angle of 83.60 at a concentration of 7% wt TiO<sub>2</sub> which means an increase in hydrophobic properties. The performance of RDF-TENG films without the addition of TiO<sub>2</sub> on the CS-PVA nanocomposite matrix resulted in an output voltage and current of ~25.5 V and ~3.6  $\mu$ A, and the performance RDF-TENG increased optimally with the addition of 3% TiO<sub>2</sub> with an increase in the output voltage of 4.4-fold, and current 2.8-fold. while performance under different humidity conditions (15% and 95% RH) output voltage increased 1.6-fold and current increased 1.4-fold with output voltage and current from ~112.5 V to ~180 V and current respectively from ~10.2  $\mu$ A to ~13.7  $\mu$ A. The increase was caused by the interaction of hydroxyl groups and water molecules through hydrogen bonds and the availability of free oxygen due to the distribution of TiO<sub>2</sub> particles which increased the positive triboelectrification properties of the film. The performance of RDF TENG with low rotation and small torque has shown a relatively constant conversion efficiency. This is different from other rotational power generation machines, such as electromagnetic generators (EMG) which require high rotation and large torque to improve conversion efficiency. This provides an alternative solution for energy conversion models especially low mechanical energy by using triboelectric nanogenerator models.

In addition, I suggest authors compare electrical engine power for rotation and RDF-TENG output energy in order to find the efficiency evaluation coefficient. This illustrates transformation efficiency.

#### Conflict of interest

The authors declare no conflict of interest. The funders had no role in research design; in the collection, analysis, or interpretation of data, in the writing of the manuscript which may influence the work reported in this paper, or in the decision to

publish its results.

### **Financing**

This work is supported and funded by the Institute for Research and Community Service, Universitas Negeri Surabaya (Unesa), with a grant contract number B/37502/2022.

### **Data availability**

Manuscript has data included as electronic supplementary material, in a data repository; <https://github.com/arisansori/Supplementary-Materials-.git>

### **Acknowledgements**

We gratefully acknowledge the support of the Surabaya State University (Unesa) Research and Community Service Institute, for research funding with a grant contract number: B/37502/2022. We are also grateful for the technical support from the Energy Conversion Laboratory at the Department of Mechanical Engineering, University Brawijaya, Central Laboratory of Life Sciences, University Brawijaya, and Advanced Mineral & Material Central Laboratory FMIPA, State University of Malang.

### **References**

- [1] G. I. Dzhardimalieva, B. C. Yadav, T. V. Lifintseva, and I. E. Uflyand, "Polymer chemistry underpinning materials for triboelectric nanogenerators (TENGs): Recent trends," *Eur. Polym. J.*, vol. 142, p. 110163, 2021, doi: 10.1016/j.eurpolymj.2020.110163.
- [2] J. Wang *et al.*, "Achieving ultrahigh triboelectric charge density for efficient energy harvesting," *Nat. Commun.*, vol. 8, no. 1, pp. 1–7, 2017, doi: 10.1038/s41467-017-00131-4.
- [3] K. Xia, J. Fu, and Z. Xu, "Multiple-Frequency High-Output Triboelectric Nanogenerator Based on a Water Balloon for All-Weather Water Wave Energy Harvesting," *Adv. Energy Mater.*, vol. 10, no. 28, pp. 1–9, 2020, doi: 10.1002/aenm.202000426.
- [4] G. Song *et al.*, "Molecularly Engineered Surface Triboelectric Nanogenerator by Self-Assembled Monolayers (METS)," *Chem. Mater.*, vol. 27, no. 13, pp. 4749–4755, 2015, doi: 10.1021/acs.chemmater.5b01507.
- [5] S. Mallakpour and N. Jarang, "Mechanical, thermal and optical properties of nanocomposite films prepared by solution mixing of poly(vinyl alcohol) with titania nanoparticles modified with citric acid and Vitamin C," *J. Plast. Film Sheeting*, vol. 32, no. 3, pp. 293–316, 2016, doi: 10.1177/8756087915597024.
- [6] Khushboo and P. Azad, *Design and implementation of conductor-to-dielectric lateral sliding TENG mode for low power electronics*, vol. 698, no. May. Springer Singapore, 2019.
- [7] H. W. Park *et al.*, "Electron blocking layer-based interfacial design for highly-enhanced triboelectric nanogenerators," *Nano Energy*, vol. 50, pp. 9–15, 2018, doi: 10.1016/j.nanoen.2018.05.024.
- [8] P. Trihutomo, Marji, M. Harly, B. A. Wahyudi, and M. B. Radja, "the

Effect of Clathrin Protein Addition on Increasing the Number of Electrons in Organic Dye-Sensitized Solar Cell (Dssc)," *EUREKA, Phys. Eng.*, vol. 2022, no. 2, pp. 15–27, 2022, doi: 10.21303/2461-4262.2022.001957.

[9] P. Kum-onsa *et al.*, "Gold-nanoparticle-deposited TiO<sub>2</sub> nanorod/poly(Vinylidene fluoride) composites with enhanced dielectric performance," *Polymers (Basel)*, vol. 13, no. 13, pp. 1–14, 2021, doi: 10.3390/polym13132064.

[10] N. D. Huynh, H. Park, K. Chung, and D. Choi, "Effect on TENG Performance by Phase Control of TiO<sub>x</sub> Nanoparticles," *Compos. Res.*, vol. 31, no. 6, pp. 365–370, 2018.

[11] W. Bunriw, V. Harnchana, C. Chanthad, and V. N. Huynh, "Natural rubber-TiO<sub>2</sub> nanocomposite film for triboelectric nanogenerator application," *Polymers (Basel)*, vol. 13, no. 13, pp. 1–12, 2021, doi: 10.3390/polym13132213.

[12] Y. Wang, L. Zhang, and A. Lu, "Highly stretchable, transparent cellulose/PVA composite hydrogel for multiple sensing and triboelectric nanogenerators," *J. Mater. Chem. A*, vol. 8, no. 28, pp. 13935–13941, 2020, doi: 10.1039/d0ta02010a.

[13] K. Shi, X. Huang, B. Sun, Z. Wu, J. He, and P. Jiang, "Cellulose/BaTiO<sub>3</sub> aerogel paper based flexible piezoelectric nanogenerators and the electric coupling with triboelectricity," *Nano Energy*, vol. 57, pp. 450–458, 2019, doi: 10.1016/j.nanoen.2018.12.076.

[14] X. Chen, A. Yusuf, J. S. del Rio, and D. Y. Wang, "A facile and robust route to polyvinyl alcohol-based triboelectric nanogenerator containing flame-retardant polyelectrolyte with improved output performance and fire safety," *Nano Energy*, vol. 81, p. 105656, 2021, doi: 10.1016/j.nanoen.2020.105656.

[15] R. Singh and H. W. Rhee, "The rise of bio-inspired energy devices," *Energy Storage Mater.*, vol. 23, no. February, pp. 390–408, 2019, doi: 10.1016/j.ensm.2019.04.030.

[16] Z. Zhu, K. Xia, Z. Xu, H. Lou, and H. Zhang, "Starch Paper-Based Triboelectric Nanogenerator for Human Perspiration Sensing," *Nanoscale Res. Lett.*, vol. 13, pp. 4–9, 2018, doi: 10.1186/s11671-018-2786-9.

[17] Y. Chi *et al.*, "Rice paper-based biodegradable triboelectric nanogenerator," *Microelectron. Eng.*, vol. 216, no. June, p. 111059, 2019, doi: 10.1016/j.mee.2019.111059.

[18] V. Gots, P. Palchyk, and O. Berdnyk, "Investigation of Properties of Modified Basalt Fibers," *EUREKA Phys. Eng.*, vol. 4, no. 4, pp. 43–48, 2018, doi: 10.21303/2461-4262.2018.00673.

[19] R. Ccorahua, J. Huaroto, C. Luyo, M. Quintana, and E. A. Vela, "Enhanced-performance bio-triboelectric nanogenerator based on starch polymer electrolyte obtained by a cleanroom-free processing method," *Nano Energy*, vol. 59, no. March, pp. 610–618, 2019, doi: 10.1016/j.nanoen.2019.03.018.

[20] L. Shi *et al.*, "Enhanced performance triboelectric nanogenerators based on solid polymer electrolytes with different concentrations of cations," *Nano Energy*, vol. 64, no. August, p. 103960, 2019, doi: 10.1016/j.nanoen.2019.103960.

[21] J. Shen, Z. Li, J. Yu, and B. Ding, "Humidity-resisting triboelectric nanogenerator for high performance biomechanical energy harvesting," *Nano Energy*,

vol. 40, pp. 282–288, 2017, doi: 10.1016/j.nanoen.2017.08.035.

[22] R. Ccorahua, A. Cordero, C. Luyo, M. Quintana, and E. Vela, “Starch-Cellulose-Based Triboelectric Nanogenerator Obtained by a Low-Cost Cleanroom-Free Processing Method,” *MRS Adv.*, vol. 4, no. 23, pp. 1315–1320, 2019, doi: 10.1557/adv.2018.652.

[23] F. G. Torres, O. P. Troncoso, C. Torres, D. A. Díaz, and E. Amaya, “Biodegradability and mechanical properties of starch films from Andean crops,” *Int. J. Biol. Macromol.*, vol. 48, no. 4, pp. 603–606, 2011, doi: 10.1016/j.ijbiomac.2011.01.026.

[24] J. Y. Kim, Y. G. Choi, S. R. Byul Kim, and S. T. Lim, “Humidity stability of tapioca starch-pullulan composite films,” *Food Hydrocoll.*, vol. 41, pp. 140–145, 2014, doi: 10.1016/j.foodhyd.2014.04.008.

[25] R. Ccorahua, J. Huaroto, C. Luyo, M. Quintana, and E. A. Vela, “Enhanced-performance bio-triboelectric nanogenerator based on starch polymer electrolyte obtained by a cleanroom-free processing method,” *Nano Energy*, vol. 59, pp. 610–618, 2019, doi: 10.1016/j.nanoen.2019.03.018.

[26] B. Ben Doudou, A. Vivet, J. Chen, A. Laachachi, T. Falher, and C. Poilâne, “Hybrid carbon nanotube - Silica/ polyvinyl alcohol nanocomposites films: Preparation and characterisation,” *J. Polym. Res.*, vol. 21, no. 4, 2014, doi: 10.1007/s10965-014-0420-9.

[27] Fei P, Shi Y, Zhou M, Cai J, Tang S, Xiong H. Effects of nano-TiO<sub>2</sub> on the properties and structures of starch/poly( $\epsilon$ -caprolactone) composites. *J Appl Polym Sci*, vol. 130, no.6, pp. 4129-4136, 2013, doi:10.1002/app.39695

[28] J. Alvarez-Ramirez, J. Vazquez-Arenas, A. García-Hernández, and E. J. Vernon-Carter, “Improving the mechanical performance of green starch/glycerol/Li + conductive films through cross-linking with Ca<sup>2+</sup>,” *Solid State Ionics*, vol. 332, no. November 2018, pp. 1–9, 2019, doi: 10.1016/j.ssi.2019.01.002.

[29] M. Zamanian, H. Sadriani, M. Khojastehpour, F. Hosseini, and J. Thibault, “Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties of PVA films,” *J. Membr. Sci. Res.*, vol. 7, no. 2, pp. 67–73, 2021, doi: 10.22079/JMSR.2020.112911.1283.

[30] N. E. Kochkina and O. A. Butikova, “Effect of fibrous TiO<sub>2</sub> filler on the structural, mechanical, barrier and optical characteristics of biodegradable maize starch/PVA composite films,” *Int. J. Biol. Macromol.*, vol. 139, pp. 431–439, 2019, doi: 10.1016/j.ijbiomac.2019.07.213.

[31]. A. Oleyaei, H. Almasi, B. Ghanbarzadeh, and A. A. Moayedi, *Synergistic reinforcing effect of TiO<sub>2</sub> and montmorillonite on potato starch nanocomposite films: Thermal, mechanical and barrier properties*, vol. 152. Elsevier Ltd., 2016.

[32] A. M. Abdullah, S. B. Aziz, and S. R. Saeed, “Structural and electrical properties of polyvinyl alcohol (PVA):Methyl cellulose (MC) based solid polymer blend electrolytes inserted with sodium iodide (NaI) salt,” *Arab. J. Chem.*, vol. 14, no. 11, p. 103388, 2021, doi: 10.1016/j.arabjc.2021.103388.

[33] A. D. Adamu, S. S. Jikan, B. H. A. Talip, N. A. Badarulzaman, and S. Yahaya, “Effect of glycerol on the properties of tapioca starch film,” *Mater. Sci. Forum*, vol. 888 MSF, pp. 239–243, 2017, doi:

10.4028/www.scientific.net/MSF.888.239.

[34] H. Abral, A. Hartono, F. Hafizulhaq, D. Handayani, E. Sugiarti, and O. Pradipta, "Characterization of PVA/cassava starch biocomposites fabricated with and without sonication using bacterial cellulose fiber loadings," *Carbohydr. Polym.*, vol. 206, pp. 593–601, 2019, doi: 10.1016/j.carbpol.2018.11.054.

[35] R. Surudžić *et al.*, "Physico-chemical and mechanical properties and antibacterial activity of silver/poly(vinyl alcohol)/graphene nanocomposites obtained by electrochemical method," *Compos. Part B Eng.*, vol. 85, pp. 102–112, 2016, doi: 10.1016/j.compositesb.2015.09.029.

[36] Tian, J. Yan, A. V. Rajulu, A. Xiang, and X. Luo, "Fabrication and properties of polyvinyl alcohol/starch blend films: Effect of composition and humidity," *Int. J. Biol. Macromol.*, vol. 96, pp. 518–523, 2017, doi: 10.1016/j.ijbiomac.2016.12.067.

[37] S. Patil *et al.*, "Effect of polymer blending on mechanical and barrier properties of starch-polyvinyl alcohol based biodegradable composite films," *Food Biosci.*, vol. 44, no. PA, p. 101352, 2021, doi: 10.1016/j.fbio.2021.101352.

[38] N. E. Kochkina and O. A. Butikova, "Effect of fibrous TiO<sub>2</sub> filler on the structural, mechanical, barrier and optical characteristics of biodegradable maize starch/PVA composite films," *Int. J. Biol. Macromol.*, vol. 139, pp. 431–439, 2019, doi: 10.1016/j.ijbiomac.2019.07.213.

[39] A. Garbuz, P. Bilym, and D. Zubenko, "Features of Changes of Structure and Adhesive Properties for Acrylic Adhesives Under the Influence of the Filler," *EUREKA Phys. Eng.*, vol. 3, no. 3, pp. 13–16, 2016, doi: 10.21303/2461-4262.2016.00075.

[40] A. A. Khalaf, S. A. Abed, S. S. Alkhfaji, M. A. Al-Obaidi, and M. M. Hanon, "the Effect of Adding Natural Materials Waste on the Mechanical Properties and Water Absorption of Epoxy Composite Using Grey Relations Analysis," *EUREKA, Phys. Eng.*, no. 1, pp. 131–142, 2022, doi: 10.21303/2461-4262.2022.001952.

[41] J. Alvarez-Ramirez, J. Vazquez-Arenas, A. García-Hernández, and E. J. Vernon-Carter, "Improving the mechanical performance of green starch/glycerol/Li + conductive films through cross-linking with Ca<sup>2+</sup>," *Solid State Ionics*, vol. 332, no. November 2018, pp. 1–9, 2019, doi: 10.1016/j.ssi.2019.01.002.

[42] M. Ji *et al.*, "Enhanced mechanical properties, water resistance, thermal stability, and biodegradation of the starch-sisal fibre composites with various fillers," *Mater. Des.*, vol. 198, p. 109373, 2021, doi: 10.1016/j.matdes.2020.109373.

[43] P. Bergo, P. J. A. Sobral, and J. M. Prison, "Effect of glycerol on physical properties of cassava starch films," *J. Food Process. Preserv.*, vol. 34, no. SUPPL. 2, pp. 401–410, 2010, doi: 10.1111/j.1745-4549.2008.00282.x.

[44] A. D. Adamu, S. S. Jikan, B. H. A. Talip, N. A. Badarulzaman, and S. Yahaya, "Effect of glycerol on the properties of tapioca starch film," *Mater. Sci. Forum*, vol. 888 MSF, pp. 239–243, 2017, doi: 10.4028/www.scientific.net/MSF.888.239.

[45] Y. Wang *et al.*, "Development and characterization of potato starch/lactucin/nano-TiO<sub>2</sub> food packaging for sustained prevention of mealworms," *Food Packag. Shelf Life*, vol. 33, p. 100837, Sep. 2022, doi: 10.1016/J.FPSL.2022.100837.

[46] J. Sintusiri, V. Harnchana, V. Amornkitbamrung, A. Wongsas, and P. Chindaprasirt, "Portland Cement-TiO<sub>2</sub> triboelectric nanogenerator for robust large-scale mechanical energy harvesting and instantaneous motion sensor applications," *Nano Energy*, vol. 74, no. January, p. 104802, 2020, doi: 10.1016/j.nanoen.2020.104802.

[47] H. W. Park *et al.*, "Effects of embedded TiO<sub>2</sub>-x nanoparticles on triboelectric nanogenerator performance," *Micromachines*, vol. 9, no. 8, 2018, doi: 10.3390/mi9080407.

[48] M. Zamanian, H. Sadrnia, M. Khojastehpour, F. Hosseini, and J. Thibault, "Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties of PVA films," *J. Membr. Sci. Res.*, vol. 7, no. 2, pp. 67–73, 2021, doi: 10.22079/JMSR.2020.112911.1283.

[49] L. Rong, M. Shen, H. Wen, Y. Ren, W. Xiao, and J. Xie, "Preparation and characterization of hyacinth bean starch film incorporated with TiO<sub>2</sub> nanoparticles and Mesona chinensis Benth polysaccharide," *Int. J. Biol. Macromol.*, vol. 190, no. 235, pp. 151–158, 2021, doi: 10.1016/j.ijbiomac.2021.08.180.

[50] N. Wang *et al.*, "New Hydrogen Bonding Enhanced Polyvinyl Alcohol Based Self-Charged Medical Mask with Superior Charge Retention and Moisture Resistance Performances," *Adv. Funct. Mater.*, vol. 31, no. 14, pp. 1–14, 2021, doi: 10.1002/adfm.202009172.

[51] N. Wang, Y. Zheng, Y. Feng, F. Zhou, and D. Wang, "Biofilm material based triboelectric nanogenerator with high output performance in 95% humidity environment," *Nano Energy*, vol. 77, p. 105088, 2020, doi: 10.1016/j.nanoen.2020.105088.

## Review\_08.03.2023

I am asking sorry for the delay in answering. I had to more in detail read the author's response. Following my observations:

Before giving the authors "Green" light, I suggest to:

To perform a more precise check of their manuscript in the framework type and suggestions from the reviewer namely:

- to use proper subscripts for the formulae (red "2" in TiO<sub>2</sub> still not changed in the name of section "3. 1. Chemical, structural, and morphological analysis of the cassava starch-PVA/TiO<sub>2</sub> nanocomposite film") as well as in the text highlighted by green "SEM results show ..... are still individual");

- to move the following text and figure 9 from 3.5 section to the 2. Materials and methods section as it was demanded by the reviewer:

"The schematic diagram of the TENG output test mechanism is shown in Fig. 9. Conditioning for humidity levels of 15% and 95% was carried out by placing the TENG in a closed cylindrical chamber. The operating T-TENG) the mode consists of a rotor with four electret sectors attached to a dielectric substrate using a polyimide film. The stator is composed of six sectors of a CS-PVA/TiO<sub>2</sub> nanocomposite film connected to a copper foil electrode. Distance between the rotor and stator surfaces with an air gap of 0.10 mm"

After that, I can recommend the article for publishing.

## Review

*The article has novelty and some interesting data.*

*Nevertheless, the article contains flaws that have to be eliminated. For this, full proofreading for the English language has to be performed. Many sentences should be rewritten, shortened, and clarified. Subscripts in the formulas of substances have to be checked. This is because many subscripts as plain text are shown.*

*In addition, the abstract has to be completely rewritten. The abstract of the work has to be attractive to a reader and not contain GENERAL information (highlighted by violet). The quality of the figures has to be significantly increased.*

*In order to prove the uniform spacing of NPs, maps of the elements' distribution have to be provided.*

Flaws and mistakes are highlighted in red / red

Reviewer comments are highlighted in yellow

Sentences that raised questions are highlighted in green

Received date: 08.11.2022

Accepted date:

Section: *Materials Science*

**ENHANCED MECHANICAL AND WATER RESISTANCE PROPERTIES OF**

# CASSAVA STARCH-PVA NANOCOMPOSITES WITH $\text{TiO}_2$ NANOFILLERS FOR TRIBOELECTRIC NANOGENERATORS FILMS

**Aris Ansori**

**Corresponding author**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str., Malang, Indonesia, 65145*

*Department of Mechanical engineering*

*Universitas Negeri Surabaya*

*Ketintang str, Surabaya, Indonesia 60231*

*arisansori@unesa.ac.id*

*ORCID: orcid.org/0000-0001-8760-5093*

**Sudjito Soeparman**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str, Malang, Indonesia, 65145*

*sudjitospn@ub.ac.id*

*ORCID: orcid.org/0000-0003-3490-7543*

**Denny Widhiyanuriyawan**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str, Malang, Indonesia, 65145*

*denny\_w@ub.ac.id*

*ORCID: orcid.org/0000-0001-5729-4212*

**Teguh Dwi Widodo**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str, Malang, Indonesia, 65145*

*widodoteguhdwi@ub.ac.id*

*ORCID: orcid.org/0000-0002-7005-7315*

Author's order	First Name	Middle name	Last Name
1	Aris		Ansori
2	Sudjito		Soeparman
3	Denny		Widhiyanuriyawan
4	Teguh	Dwi	Widodo

## Abstract

The utilization of biopolymers for energy applications continues to attract researchers, due to the unique properties of biopolymers that are easily modified, such as cassava starch (CS) biopolymer which has hydroxyl molecular chains.



However, the brittle, and non-waterproof nature of starch films is an obstacle to their use in triboelectric nanogenerator (TENG) solid-solid films. This study aims to improve the physicochemical properties of cassava starch films by modifying them into nanocomposite films. The nanocomposite film was made from 70:30 CS/polyvinyl alcohol (PVA) composite and variation of  $\text{TiO}_2$  nanoparticles addition using solvent casting method. The results showed that the mechanical properties of cassava starch film increased with the addition of PVA. Meanwhile, the addition of  $\text{TiO}_2$  above 1 wt% of the mechanical properties of the film tends to decrease. The film has low wettability properties with a contact angle of  $83.6^\circ$ . The performance of the nanocomposite film as a Rotary disc freestanding film (RDF-TENG) produces 4.4-fold the output voltage and 2.8-fold the current compared to the film without  $\text{TiO}_2$ . This is a new finding that the CS/PVA- $\text{TiO}_2$  nanocomposite film has the potential for TENG films in high-humidity environmental conditions.

**Keywords:** nanocomposite film,  $\text{TiO}_2$ , film properties, performance, the triboelectric nanogenerator

## 1. Introduction

Triboelectric nanogenerator (TENG) is a micro/nano energy harvesting device that converts the mechanical energy of the surrounding environment into electrical energy based on the triboelectricity effect between two materials that have different electronegativity levels and has been proven to be effective and efficient [1]. TENG working principles based on contact electrification and electrostatic induction make a self-powered system with high efficiency, low cost, abundant mechanical energy source, and high output [2, 3]. TENG was first developed by Wang et al. in 2013, The research was carried out by utilizing the triboelectric effect of materials to harvest mechanical energy into electricity and showed high energy conversion efficiency [4].

TENG has become one of the promising energy conversion devices to convert mechanical energy into electrical energy due to the capacity of triboelectric materials. The TENG device generally consists of two friction materials and electrodes at the top and bottom of the device. Physical contact between two friction materials with different levels of electronegativity can induce a triboelectric charge which can produce a potential decrease when separated by mechanical forces and increase the flow of electrons between the electrodes via an external circuit. The dominant factor that determines the performance of TENG's output is the TENG friction material, such as; the use of nanocomposite friction materials on a nanoscale which has the advantages of mechanical strength, toughness, flexibility, transparency, dielectric, thermal or electrical conductivity properties which show an effective and efficient TENG performance improvement [5, 6].

However, TENG triboelectric nanocomposite films are still dominated by synthetic polymers which require a complicated, long, and expensive fabrication process. such as; PDMS nanocomposite films with  $\text{TiO}_2$  deposition can cause changes in oxygen vacancies on the PDMS surface which can contribute to electron exchange and trapping and have an impact on increasing TENG output power [7], DSSC output

power [8], Poly (vinylidene fluoride) (PVDF) polymer with  $\text{TiO}_2$  NPs as filler can improve the dielectric properties [9], Polydimethylsiloxane (PDMS) with different  $\text{TiO}_x$  weight ratios as a function of dielectric constant control with 5% rutile  $\text{TiO}_x$  and 7%  $\text{TiO}_x$  anatase phase produces TENG output highest  $\sim 180 \text{ V}/8,2 \mu\text{A}$  and  $211,6 \text{ V}/8,7 \mu\text{A}$  [10].

Biodegradable devices are in great demand because of the abundant raw materials available, low cost, simple process, and environmentally friendly. Various natural biodegradable materials, such as; natural rubber [11], cellulose [12, 13], chitosan, polyvinyl alcohol (PVA) [14], rice paper, and starch paper have been used to make biodegradable TENGs [15–17], and environmentally friendly raw materials and do not cause harmful effects on humans and the environment [18]. The use of starch has begun to be developed for the TENG triboelectric film because it has properties such as; biocompatible and biodegradable [16, 19–22], abundant availability, easy process, inexpensive, possessing hydroxyl groups, amorphous crystal structure, and rheological properties can provide the required resistance for TENG triboelectric film applications [23].

Meanwhile, previous studies showed high performance of TENG based on starch biofilm, such as; TENG-based, due to the binding of water molecules and hydroxyl groups through hydrogen bonds [21]. TENG-based potato starch biofilm exhibits high output voltages from 60 mV to 300 mV per  $4 \text{ cm}^2$  area, but the surface of the film is prone to cracking at several duty cycles [22]. Tapioca starch film rich in hydroxyl groups can enhance the triboelectric effect by binding water molecules on the friction film surface through hydrogen bonding [24]. The use of starch polymer electrolyte film made from a mixture of potato starch and 0.5%  $\text{CaCl}_2$  showed an increase in voltage output three times higher than pure starch from 0.4 V to 1.2 V. Starch polymer electrolyte between potato starch and 0,5%  $\text{CaCl}_2$  showed an increase in voltage output three times higher than pure starch from 0.4 v to 1.2 V [25].

However, the strong hydrophilicity of starch causes poor mechanical properties and easily soluble in prolonged contact with water. This becomes a bottleneck for starch films for TENG biodegradable applications that require long-term stability. Therefore, to increase the functionality of starch by modifying starch into nanocomposite films. In this study, we fabricated a starch-based nanocomposite film, by synthesizing cassava starch/PVA- $\text{TiO}_2$  into a nanocomposite film. Our knowledge, the use of  $\text{TiO}_2$  as a filler in starch composites to improve mechanical properties and water resistance for Biodegradable TENG has never been reported. Meanwhile, the addition of PVA to starch polymers as a composite matrix can help the formation of polymer composite bonds through hydrogen bonding and increase the number of hydroxyl groups. [26]. The use of  $\text{TiO}_2$  nanofiller which is an inorganic nanoparticle with a large specific surface area and high surface energy can result in some -OH groups or dangling bonds contained in the biopolymer matrix that can be adsorbed on the nano- $\text{TiO}_2$  surface, which can affect the physical characteristics of the natural polymer/composite properties. The sentence is not ended or not correct. In addition, the formation of hydrogen bonds and C-O-Ti bonds between starch matrices and  $\text{TiO}_2$  can help the dispersion of  $\text{TiO}_2$  as a filler in starch matrices which can improve the compatibility between starch and  $\text{TiO}_2$ . Equally, distributed?[27].

Meanwhile, the special emphasis of this study is to investigate the effect of  $\text{TiO}_2$  in CS/PVA polymer blends on mechanical properties, water resistance, and TENG characterization with CS/PVA- $\text{TiO}_2$  nanocomposite films as positive friction surfaces. We analyze the performance TENG of CS/PVA- $\text{TiO}_2$  nanocomposite films and the changes in properties of CS/PVA nanocomposite films with different concentrations of  $\text{TiO}_2$  nanofillers.

The improvement in tensile strength and elongation at break of CS/PVA composite films is due to the high mechanical properties of PVA. In addition, the water resistance property was improved with the formation of more OH groups. Meanwhile, the effect of  $\text{TiO}_2$  addition in CS/PVA composite increases the rigidity of the molecular chain with the help of hydrogen and covalent bonds, the elasticity of the molecular chain decreases which causes the elongation at break value to tend to decrease with the increase of  $\text{TiO}_2$  concentration in the CS/PVA matrix. The presence of  $\text{TiO}_2$  makes the more dense film, thus increasing the absorption of water molecules so that the film is not easily damaged.

Meanwhile, the performance of RDF-TENG nanocomposite CS/PVA film produced an output voltage and current of  $\sim 25.5$  V and  $\sim 3.6$   $\mu\text{A}$ . The effect of  $\text{TiO}_2$  addition on the performance of RDF-TENG film of CS/PVA- $\text{TiO}_2$  nanocomposite was optimally improved by the addition of 3%  $\text{TiO}_2$  which resulted in 4.4 times the output voltage and 2.8 times the current compared to the TENG film of CS/PVA without  $\text{TiO}_2$  nano-filler. Therefore, these CS/PVA- $\text{TiO}_2$  nanocomposite films have the potential for TENG films under high-humidity environmental conditions. This is not possible to understand. Split the sentence.


## **2. Materials and methods**

### **2. 1. Materials**

Materials starch used in the experiment is cassava starch produced by PT. Budi starch & Sweetener. Tbk. in Indonesia, Polyvinyl Alcohol (PVA) with an average molecular weight of  $M_w = 89,000\text{--}98,000$ , was procured from Sigma Aldrich, Anatase  $\text{TiO}_2$  nanoparticles with a particle size of 20 nm were purchased from Sigma-Aldrich, glycerol (99% purity, clear, colorless, and density:  $1.261\text{ g/cm}^3$ ) from Merck, distilled water specification; PH 8, resistivity  $>200\text{ K}\Omega$ , conductivity  $<5\text{ }\mu\text{S/cm}$ , Copper tape type dual side conductor (adhesive side and conductive outside side) and thickness 0,5 mm.

### **2. 2. Preparation of cassava starch (CS)/PVA- $\text{TiO}_2$ nanocomposite**

**Fig. 1** Describes making cassava starch (CS)/PVA- $\text{TiO}_2$  nanocomposite using the solvent casting method.

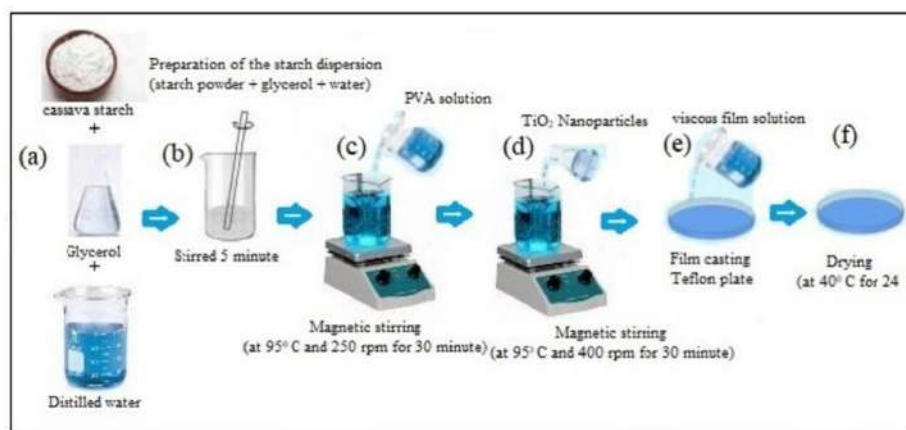

**Fig. 1.** Preparation of CS/PVA-TiO<sub>2</sub> nanocomposite films

Preparation of CS/PVA-TiO<sub>2</sub> nanocomposite films by solvent casting method as shown in **Fig. 1.** by steps; (a). making a solution of cassava starch (CS), with a composition of cassava starch (4.2 g), and glycerol (3 g) as plasticizer dispersed with distilled water (50 mL) in borosilicate glass, (b). The solution of cassava starch (CS), and glycerol was mechanically stirred for 5 minutes until the solution was completely homogeneous, (c). cassava starch solution (CS) was stirred with a magnetic stirrer at a speed of 250 rpm at a temperature of 95 °C for 30 minutes to obtain a gelatinized starch suspension and added PVA solution while stirring continuously (250 rpm) for 30 minutes until it dissolved completely and a clear solution was formed, (d). CS/PVA clear solution was added with TiO<sub>2</sub> nanoparticles (0.5, 1, 3, 5, 7 % wt), (e). **CS/PVA-TiO<sub>2</sub> nanocomposite films were cast with a Teflon mold diameter of 100 mm. I can't understand,** (f). The drying of the film was carried out in a hot air oven at 40 °C for 24 hours. Meanwhile, the composition ratio of Cassava starch (CS), PVA, and TiO<sub>2</sub> for nanocomposite film samples are presented in **Table 1.**

**Table 1**

Composition of The Various Film Nanocomposite Samples

Nanocomposite Sample	Composition		
	Cassava strach (CS)	PVA	TiO <sub>2</sub> ( % wt)
CS-PVA	70	30	0
CS-PVA/0,5 TiO <sub>2</sub> wt%	70	30	0,5
CS-PVA/1 TiO <sub>2</sub> wt%	70	30	1
CS-PVA/3 TiO <sub>2</sub> wt%	70	30	3
CS-PVA/5 TiO <sub>2</sub> wt%	70	30	5
CS-PVA/7 TiO <sub>2</sub> wt%	70	30	7

First, to determine the constant weight ratio of the CS/PVA mixture (70:30), cassava starch (4.2 g) was dispersed with distilled water (50 mL) in borosilicate glass, the addition of glycerol (3 g) served as a plasticizer and mechanical stirring was carried out until completely homogeneous. Furthermore, stirring with a magnetic stirrer at 250 rpm at a temperature of 95 °C for 30 minutes to obtain a gelatinized starch suspension.


Meanwhile, in another borosilicate glass, the PVA solution was prepared by dissolving 1,8 g of PVA with 40 mL of distilled water and mechanically stirring (250 rpm) for 5 minutes, then the temperature was gradually increased to 95 °C and continuously stirred (250 rpm) for 30 minutes until completely dissolved and a clear solution is formed. Mixing of the two solutions (gelatinized CS suspension- PVA suspension) was carried out at room temperature and continued to be stirred with a magnetic stirrer (250 rpm, 95 °C).

Furthermore, the PVA solution, cassava starch suspension, and TiO<sub>2</sub> (0,5%, 1%, 3 %, 5%, and 7% wt) (**Table 1**) particle dispersion (CS/PVA-TiO<sub>2</sub>) were combined and stirred continuously at 400 rpm and a temperature of 95 °C for 30 minutes using a magnetic stirrer. The solution was in a vacuum for 10 minutes using vacuum machine to remove residual air from the solution. The viscous solution produced from the CS/PVA-TiO<sub>2</sub> polymer was poured into a Teflon mold (radius 50 mm). when pouring, the volume of the polymer mixture in each mold was controlled constant, producing relatively the same thickness as the nanocomposite film sample. The drying of the film was carried out in a hot air oven at 40 °C for 24 hours. The dry film was then carefully peeled off from the Teflon mold and produced a film with an average thickness of 100 μm. The resulting nanocomposite films were kept in a zippered bag until tests were carried out to reduce water absorption according to the Ramirez method [28].


### 2. 3. Fabrication of Rotary Disk Freestanding (RDF-TENG)

The TENG structure uses Rotary-disk freestanding triboelectric nanogenerator (RDF-TENG) mode. The TENG structure uses Rotary-disk freestanding (RDF-TENG) mode. The rotary disk freestanding TENG (RDF-TENG) structure consists of two parts, rotor and stator. Rotor structure parameters with the number of film segments ( $n$ ) = 4, outer radius ( $r_2$ ) = 50 mm, inner radius ( $r_1$ ) = 5 mm, and made of commercial polyimide thin film (0.03 mm) as a triboelectric film glued to an acrylic surface (radius = 50 mm). Meanwhile, the stator structure parameters consisting of CS-PVA/TiO<sub>2</sub> nanocomposite films were cut to form an equal interval electrode model with the number of film segments ( $n$ ) = 8, outer radius ( $r_2$ ) = 50 mm, inner radius ( $r_1$ ) = 5 mm, and the nanocomposite film thickness was 100 μm. Next, the cut nanocomposite film was glued to the copper foil (electrode film A, and B). Where the tip of the copper foil electrode is slightly exaggerated to connect the external circuit with the help of a conducting wire so that electrons can flow into the external circuit. External mechanical energy uses a DC electric motor that is connected to the TENG rotor shaft in a freestanding rotational mode. Meanwhile, the gap between the rotor and stator was controlled with a distance of 0,10 mm to keep the friction between the surface of the polyimide film and the CS/PVA-TiO<sub>2</sub> nanocomposite film stable. The design and structure of RDF-TENG with cassava starch/PVA-TiO<sub>2</sub> nanocomposite films are presented in **Fig. 2a**.



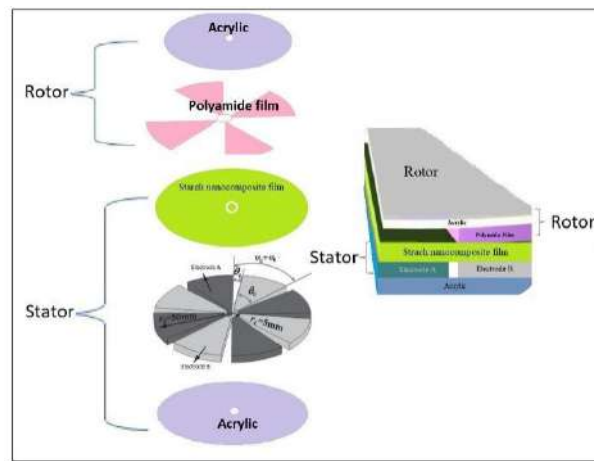

a

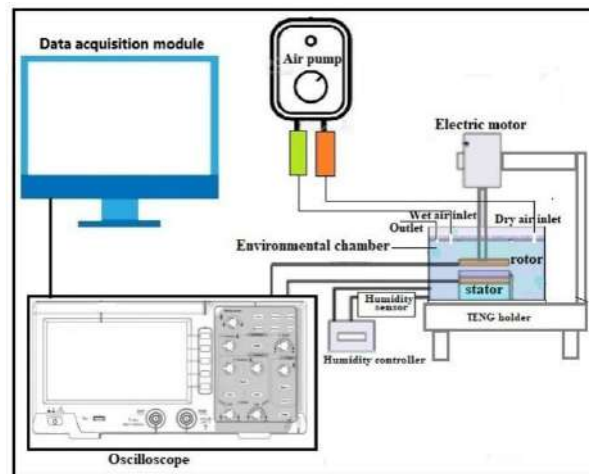

b

**Fig. 2.** RDF-TENG testing and structure: a - RDF TENG array, b- TENG testing instrument

Low quality of the figure.

The schematic diagram of the TENG output test mechanism is shown in **Fig. 2b**. Conditioning for humidity levels of 15% and 95% were carried out by placing the TENG in a closed cylindrical chamber. The operating Rotary-disk freestanding (RDF-TENG) mode consists of a rotor with four electret sectors attached to a dielectric substrate using a polyimide film. The stator is composed of six sectors of a CS-PVA/TiO<sub>2</sub> nanocomposite film connected to a copper foil electrode. Distance between the rotor and stator surfaces with an air gap of 0.10 mm. This part as well as figure 8 have to be removed to **2. Materials and methods** section.

## 2. 4. Characterizations of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films

### 2. 4. 1. Chemical, structural, and morphological analysis

Surface analysis and morphology of starch/PVA-TiO<sub>2</sub> nanocomposite films using Scanning Electron Microscope (FESEM) FEI Quanta FEG 650. The dry film sample was sprayed with gold-palladium under vacuum conditions to increase its conductivity. The test was carried out at a voltage of 15xKV with a magnification of 500x, and 10Kx. The functional groups of the nanocomposite films were analyzed using Fourier

transform infrared spectroscopy (FTIR) with an IRPrestige-21 spectrophotometer (Shimadzu, USA). FTIR measurements were carried out at room temperature ( $25 \pm 10$  °C) in the wave number range of 600–4000  $\text{cm}^{-1}$  with a resolution of 2  $\text{cm}^{-1}$  and an average of more than 32 scans. The X-ray diffraction (XRD) analysis to determine the crystalline atom form of starch/PVA-TiO<sub>2</sub>. The degree of crystallinity of the film samples was recorded using a PAN analytical Xpert Pro diffractometer with Cu K $\alpha$  radiation at 40kV and 40 mA, using a 20 mm Ni filter. All sample films were scanned between  $2\theta = 5^\circ$  to  $69.99^\circ$  at  $5^\circ/\text{min}$  measurement Temperature of 25 °C. Split the sentence

#### **2. 4. 2. Mechanical properties**

Testing the mechanical properties of the film consists of tensile strength (Ts), Elongation at break (Eb), and Young's Modulus (My). Testing according to the ASTM standard method D882-10 (ASTM, 2010) using the Tensile Testing Machine. The samples film (length  $\times$  width  $\times$  thickness = 100 mm  $\times$  20 mm  $\times$  5 mm) was conditioned at RH = 55% for 48 hours. Next, each film sample was mounted between the machine's grips and tested at a crosshead speed of 5 mm/min at room temperature (23 °C) [29].

#### **2. 4. 3. Water-resistance**

Water resistance testing was conducted to identify the degree of water damage to the film. The film samples (length  $\times$  width  $\times$  thickness = 100 mm  $\times$  20 mm  $\times$  0.5 mm) were immersed into beakers filled with distilled water. The immersion time of each film sample until the film texture was damaged (destroyed) in the water. The results of recording the immersion time of the film sample were used to determine the level of resistance of the film sample to water. And? Where is immersing time, other procedures, and result analysis?

#### **2. 4. 4. Water contact angle**

Measurement of the contact angle of the nanocomposite film was carried out to determine the level of wettability of the film surface to water. The sample contact angle was measured using a contact angle goniometer (Rame-Hart Instrument C, USA). The film sample (length  $\times$  width  $\times$  thickness = 25 mm  $\times$  25 mm  $\times$  0.5 mm) was placed horizontally on the contact angle measuring bench by the sessile drop method [30]. Drops of 4  $\mu\text{L}$  deionized water were placed on the film's top surface. droplet images and contact angle values are recorded from the software 20 seconds after deposition. The contact angle is calculated using a mathematical equation with the shape of a water droplet and calculates the tangent line between the water droplet and the solid film. For each film sample, 5 readings were taken at different film locations.

#### **2. 4. 5. Electrical output measurement**

TENG output performance measurement using freestanding rotary mode. The rotating mechanical energy of the DC motor is used to rotate the TENG rotor. To measure the TENG output voltage and current, the TENG rotor is energized externally by the DC motor rotation. The rotation is controlled at 200 rpm using a controller that regulates the electric current entering the DC electric motor. What was the speed? How

it was controlled?. The rotation of the rotor on the stator causes friction on the surface of the polyimide film and the CS-PVA/TiO<sub>2</sub> nanocomposite film causing a triboelectricity effect. The electrode poles of films A and B were measured output voltage and current using a digital oscilloscope (DSOX6004A Digital Storage Oscilloscope) with a load resistance of 100 MΩ. Meanwhile, the TENG output performance test based on CS-PVA/TiO<sub>2</sub> nanocomposite films under different humidity conditions was carried out in a cylindrical chamber, before the testing film was put in a closed box for 24 hours with adjusted humidity control (RH 15%, and 95%) with a saturated salt solution. Furthermore, testing the output performance of TENG in the same humidity control box was carried out in a closed cylindrical chamber, a cylindrical chamber equipped with two inlets and one outlet. Where the first inlet drains dry air (located on the right), and the second inlet drains moist air (located on the left). Meanwhile, the outlet is used to control air circulation in the cylinder (located on the left). This control mode can accurately achieve the required relative humidity in the room.

### 3. Results and discussion

#### 3. 1. Chemical, structural, and morphological analysis of the cassava starch-PVA/TiO<sub>2</sub> nanocomposite film

Structural analysis can be observed from the FTIR spectrum of the material in the range of 4000–700 cm<sup>-1</sup>. Where the molecular bond spectra of the CS/PVA polymer matrix and the change after incorporation of TiO<sub>2</sub> filler which has several characteristic peaks reflect the structure of the two biopolymers. The transmittance band of about 3285 cm<sup>-1</sup> was determined from the stretching vibration of the hydroxyl group (–OH) in CS and PVA polymers having a hydroxyl-rich average. The peak transmittance band of 1641.42 cm<sup>-1</sup> indicates the formation of hydrogen bonds in pure starch due to the flexion of the –OH molecule and shows the hygroscopic nature of the starch polymer. Characteristics of the bending of C-OH in the 1205 cm<sup>-1</sup> transmittance band. The peak at 770 – 1120 cm<sup>-1</sup> is associated with the stretching of the C–O bond of the macromolecular portion, where an intramolecular hydrogen bond is formed between two adjacent OH groups that are on the same side of the plane of the C–C carbon chain of the C–O–C group of the unit. glucose in starch [31].


Pure PVA showed hydroxyl and acetate groups, where the intermolecular and intramolecular hydrogen –OH bonds were shown in a wider band at 3296.35 cm<sup>-1</sup>.

The structure of the alkaline group confirmed the peak in the transmission band 1480 – 1190 cm<sup>-1</sup> associated with the planar buckling vibrations of C–H and O–H in both CS and PVA. The presence of a carbonyl group (C=O) is indicated by the 1732 cm<sup>-1</sup> transmission band and a hydrocarbon (alkane) group in PVA is indicated by a peak at 1373.32 cm<sup>-1</sup> [32]. Meanwhile, the chemical interaction between CS/PVA polymer molecules that causes changes in the characteristic spectral peaks of the composite, the C-OH hydrocarbon group is estimated to come from the C-O vibrations, which is confirmed by the peak of 1000-1250 cm<sup>-1</sup>. In addition, the vibration of the –OH group confirmed the absorption peak in the range of 3300-3000 cm<sup>-1</sup>. The formation of the C–H alkene functional group due to the mixing of CS/PVA which was confirmed at a wavelength of 675-995 cm<sup>-1</sup> and C-H alkane which was confirmed at a



wavelength of 2850–2970  $\text{cm}^{-1}$ .


In addition, the C-H functional group of the aromatic ring was confirmed at the wavelength of 690–900  $\text{cm}^{-1}$ . The mixing of CS/PVA polymer showed flexural vibrations of the hydrogen bonding of the –OH group at 1710.86  $\text{cm}^{-1}$  and the C–O strain at 1050–1300  $\text{cm}^{-1}$ . The stronger interaction of CS/PVA molecules is shown by intermolecular interactions through the formation of hydrogen bonds with water vapor molecules which can increase triboelectricity. At low concentrations (below 7 %  $\text{TiO}_2$  wt) in the CS/PVA polymer mixture in the FTIR spectrum, the vibration peaks did not show any additional peaks. This may be due to the overlapping bands of the CS/PVA components. However, the increase in  $\text{TiO}_2$  concentration (above 1%  $\text{TiO}_2$  wt) showed a slight shift in the peak positions of several bands in the range of 900–1100  $\text{cm}^{-1}$ . It is assumed that the absorption band at 1000  $\text{cm}^{-1}$  is associated with the  $\text{TiO}_2$  crystal domains hydrated into the CS/PVA polymer matrix. In addition, the titanium ions of the  $\text{TiO}_2$  particles can interact with the hydroxyl groups of CS/PVA, which make the nanocomposite films highly compatible. The results of the FTIR test for each concentration of  $\text{TiO}_2$  nanofiller in the cassava starch/PVA composite are presented in **Fig. 3**.

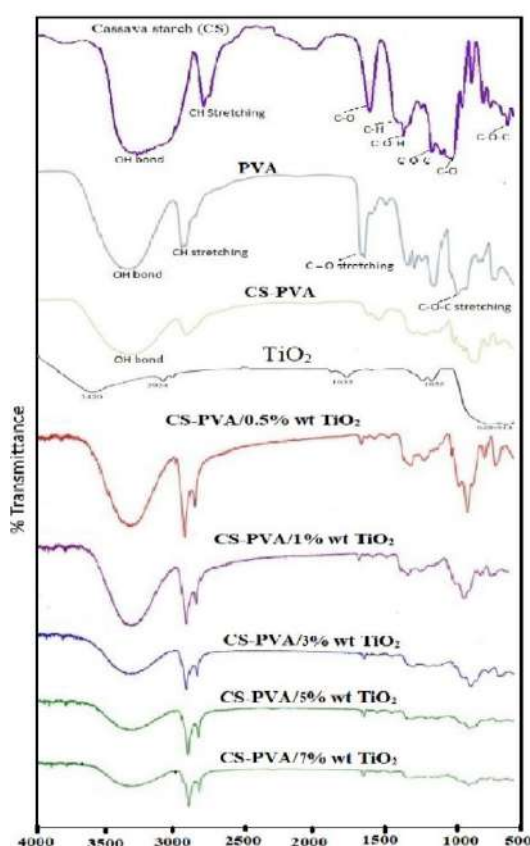

**Fig. 3.** Chemical formula analysis of cassava starch/PVA- $\text{TiO}_2$

The results of the XRD test for each concentration of  $\text{TiO}_2$  nanofiller in the cassava starch/PVA nanocomposite are presented in **Fig. 4**. Shows the XRD pattern of the sample film, the cassava starch film produced peaks at  $2\theta = 15.73^\circ$ ,  $16.51^\circ$ ,  $17.23^\circ$ ,  $19.69^\circ$ ,  $22.14^\circ$ , and  $24.37^\circ$ . Whereas, an important diffraction peak located at  $19.69^\circ$  which indicates strong intermolecular and intramolecular hydrogen bonds, and is


indicative of a semi-crystalline structure, this is not much different from the signal of the  $20^\circ$  peaks of cassava starch [33]. Meanwhile, the CS-PVA composite sample formulation produced peaks at  $2\theta = 13.11^\circ$ ,  $17.21^\circ$ ,  $19.76^\circ$ , and  $24.54^\circ$ , which indicated a change in peak. These peaks can reveal that polymer cassava starch (CS) is dispersed in PVA which can change the characterization of the films [34-35]. The incorporation of  $\text{TiO}_2$  filler into CS/PVA with variations in  $\text{TiO}_2$  concentration below 1% wt showed peak changes that were not easily visible at low concentrations. However, increasing the concentration above 1% by weight showed peaks at  $2\theta = 22.38^\circ$ ,  $27.60^\circ$ , and  $54.43^\circ$  in semicrystalline structure nanocomposite films and indicated the presence of titanium dioxide embedded in the CS/PVA polymer.

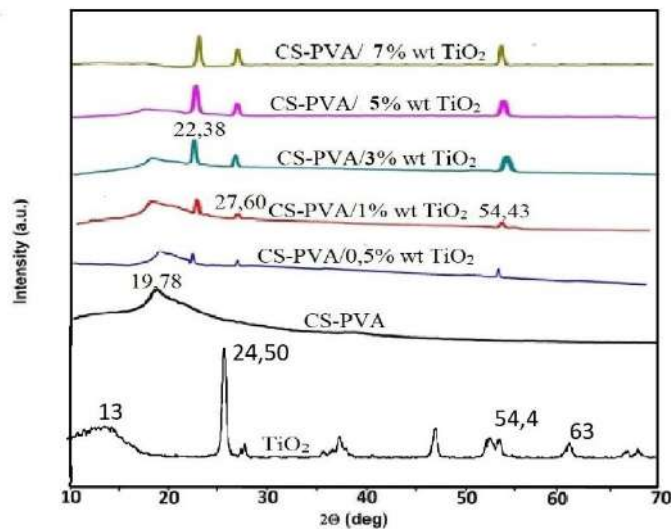


**Fig. 4.** XRD patterns for  $\text{TiO}_2$  nanoparticle, CS/PVA, and CS/PVA- $\text{TiO}_2$  nanocomposite. Why is not represented a pure  $\text{TiO}_2$  recorded spectrum?

The morphology of the polymer mixture of cassava starch (CS)/PVA and the morphological changes of the nanocomposite films after the addition of  $\text{TiO}_2$  can be observed from the material micrograph. The ability of starch granules to interact with various ceramic and mineral particles can hold these particles, which causes the added  $\text{TiO}_2$  to adhere to the surface of the starch granules well. Meanwhile, mixing CS/PVA suspension with  $\text{TiO}_2$  particles, during the gelatinization process, the  $\text{TiO}_2$  particles remain attached to the surface of the starch granules and interact with the continuous phase macromolecules of water-soluble amylose and PVA, this process most likely occurs through hydrogen bonding. SEM photographs show the morphology of each film sample appears to have a heterogeneous surface relief (Fig. 5a). The CS/PVA blend film had a small amount of agglomeration, but the agglomeration formed was not very obvious. This is due to the strong interaction between the molecules of the CS/PVA blend and the compatibility of the CS/PVA blend. Meanwhile, the addition of  $\text{TiO}_2$  nanoparticles to CS/PVA composites showed an increase in agglomeration formation. The addition of 7% wt  $\text{TiO}_2$  nanoparticles to the CS/PVA composite showed the most agglomeration of  $\text{TiO}_2$  and was clearly visible. This increase in agglomeration is due to the inert nature of  $\text{TiO}_2$  as a filler of CS/PVA composites. Significant nano-

TiO<sub>2</sub> agglomeration can affect the surface roughness of the nanocomposite film. The positive effect of the surface roughness of the nanocomposite film can be beneficial in improving the charge transfer on the friction surface when applied as a triboelectric nanogenerator (TENG) friction film. Furthermore, the possibility of TiO<sub>2</sub> nanoparticles with large specific surface area and high surface energy as a filler material for polymer composites may cause some -OH groups in the biopolymer matrix to be adsorbed on the surface of nano-TiO<sub>2</sub> which can help the dispersion of TiO<sub>2</sub> particles in CS/PVA composites through van der Waals force (Fig. 5b). Whereas, this is in contrast with the addition of TiO<sub>2</sub> concentration of more than 1% wt indicating the association of filler particles in the composite. In addition, the presence of TiO<sub>2</sub> particles with a high ratio in the film can create a winding path that prolongs the transport of water vapor molecules.

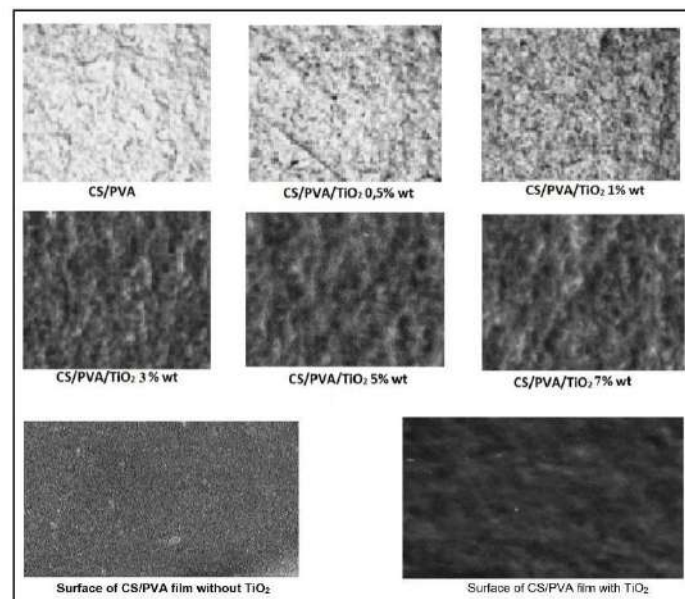

a

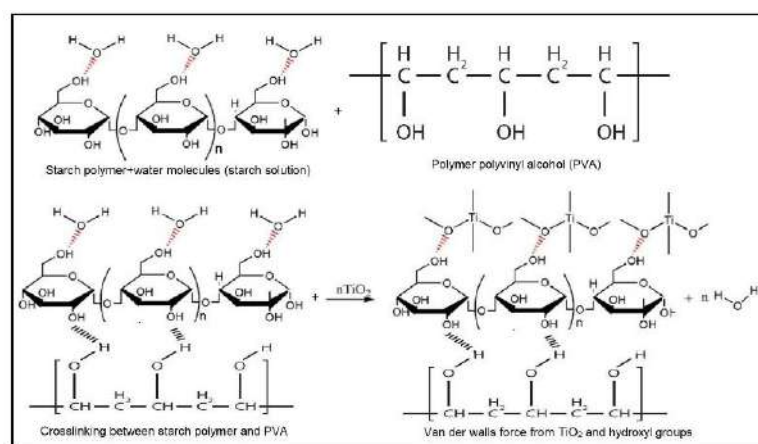

b

**Fig. 5.** Morphology surface and reaction between TiO<sub>2</sub> and polymer OH: a - surface photographs of CS/PVA without TiO<sub>2</sub> and with TiO<sub>2</sub>, b- hydroxyl groups adsorbed on nano-TiO<sub>2</sub> surface

1. Bad quality of SEM.

2. The authors use the next statement “the TiO<sub>2</sub> filler particles were evenly distributed within the polymer matrix” based on SEM images. Nevertheless, it is not possible to see it with the current quality. Even more, the size of TiO<sub>2</sub> particles in 20 nm and magnification in 500x does not allow for analyzing the uniform of distribution.
3. In the reviewer’s thinking as proof of the statement, the elements distribution maps have to be provided.

### 3. 2. Mechanical properties

To analyze the performance of CS/PVA-TiO<sub>2</sub> nanocomposite films related to mechanical viability, tests were carried out which included; Tensile Strength (T<sub>S</sub>) is the maximum tensile stress that the material can sustain before failure, Young's modulus (M<sub>y</sub>) is the level of elasticity of the material under longitudinal traction, and elongation at break point (E<sub>B</sub>) is a measure of the elasticity of the material. The results of the study of mechanical properties (**Table 2**) show that the tensile properties of the CS/PVA composite film are very good with 14.23 MPa and elongation at break point of 112.13%. The mechanical properties of CS/PVA composites are good due to the high mechanical properties of PVA due to the flexible C–C and a large number of –OH groups. In addition, the interaction of the –OH group of both CS and PVA polymers through hydrogen bonds makes good compatibility between CS and PVA polymers. So far, the results of previous studies reported that decreasing the concentration of PVA polymer in starch/PVA composites decreased the mechanical properties of the films [36, 37]. Meanwhile, the incorporation of TiO<sub>2</sub> particles into the CS/PVA composite showed a significant increase in the Tensile Strength value for the CS/PVA/TiO<sub>2</sub> film sample – 0.5 wt% increased from 14.23 MPa to 19.11 MPa. While the addition of TiO<sub>2</sub> – 1 wt% showed the optimal Tensile Strength of 21.20 MPa. However, the effect of TiO<sub>2</sub> on the CS/PVA composite caused the elongation at break value of the CS/PVA-TiO<sub>2</sub> nanocomposite to decrease. On the other hand, the addition of TiO<sub>2</sub> nanoparticles above 3 wt% shows that the Tensile Strength tends to decrease and the elongation at break tends to decrease. The possibility of adding more than 3 wt% of nanoparticles causes TiO<sub>2</sub> particles to agglomerate and spread unevenly. where these results are in line with research reported by previous researchers [31, 38]. besides, the concentration of filler material can increase the adhesion strength of the material [39-40]. The improvement of mechanical properties of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films was in line with previous studies using a variety of fillers on starch/glycerol/Li composite films [41], and starch-sisal fiber [42]. In addition to fillers, the effect of using glycerol also has an impact on the properties of elongation at the break [43, 44], dan Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties [45–49]. The results of testing the mechanical properties of the film with variations in the percentage of TiO<sub>2</sub> content were 0.5%, 1 %, 3 %, 5 %, and 7 % are presented in **Table 2**.


**Table 2**

#### Mechanical Characterization of Nanocomposite Film

In the table, it is seen certain dependencies between X (TiO<sub>2</sub> quantity) vs Y

(Mechanical property). It will be much better if the authors show them as plots.

Composite Sample	Mechanical Characterization		
	Ultimate Tensile Strength (Ts), MPa	Elongation at break (Eb), %	Young's Modulus (My), MPa
CS-PVA	14.23±2.25	112.13±2.28	70.27±4.12
CS-PVA/0,5 TiO <sub>2</sub> wt%	19.11±1.35	80.45±9.25	113.38±4.57
CS-PVA/1 TiO <sub>2</sub> wt%	21.20±2.52	78.20±17.12	75.45±6.59
CS-PVA/3 TiO <sub>2</sub> wt%	10.13±1.26	81.43±4.22	73.27±8.53
CS-PVA/5 TiO <sub>2</sub> wt%	9.27±1.60	76.23±2.55	75.83±8.12
CS-PVA/7 TiO <sub>2</sub> wt%	9.50±1.75	73.23±15.54	74.76±9.35

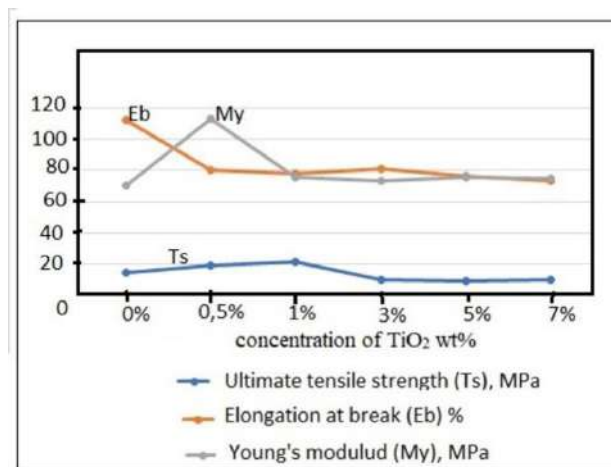


**Fig. 6.** Comparison of Ts, Eb, and My values of CS/PVA-TiO<sub>2</sub> nanocomposite films due to different concentrations of TiO<sub>2</sub>

### 3. 3. Water-resistance of CS/PVA-TiO<sub>2</sub> nanocomposite films

The water resistance test of CS/PVA-TiO<sub>2</sub> nanocomposite films aims to determine the degree of film damage when interacting with water molecules. The test method and results of water-resistance testing of nanocomposite films are presented in **Fig. 7**. To determine the water resistance of CS/PVA-TiO<sub>2</sub> nanocomposite films, it was carried out by immersing the nanocomposite films in cylindrical beaker filled with distilled water. Dimensions of the film tested L x w x h (30 x 20 x 0.01 mm). The immersion film was carried out until the film texture was damaged and crushed, as presented in (**Fig. 7, a**). The water resistance test results of the films are presented (**Fig. 7, b**), the water resistance of CS/PVA nanocomposite films with TiO<sub>2</sub> nanofiller increased 2-fold compared to that without TiO<sub>2</sub>. where, the water resistance of the CS film for 17 hours, CS/PVA increased for 20 hours, and the optimal water resistance of the SC/PVA-TiO<sub>2</sub> nanocomposite film for 32 hours with the addition of 7% by weight of TiO<sub>2</sub>. Split the sentence. The resistance of CS films is influenced by the number of hydroxyl groups in the polymer molecule, where the hydroxyl groups bind to water molecules by forming hydrogen bonds. The increase in the number of hydroxyl groups in the CS/PVA film can occur from the intramolecular interaction of the CS/PVA polymer mixture, which can significantly increase the binding of water molecules. Meanwhile, the waterproof properties of CS/PVA-TiO<sub>2</sub> nanocomposite films can be due to the



influence of hydroxyl groups that bind water molecules through hydrogen bonds. In addition, the presence of  $\text{TiO}_2$  in the CS/PVA polymer mixture makes the film denser, thereby increasing the absorption capacity of water molecules. On the other hand,  $\text{TiO}_2$  also has hydrophobic properties which can slow down the absorption of water molecules on the surface film. This result is not much different from the results of previous research reports, the effect of  $\text{TiO}_2$  nanofiller in polymer films causes a decrease in moisture penetration of corn starch/PVA- $\text{TiO}_2$  films [38], Potato Starch/Montmorillonite- $\text{TiO}_2$  composite films [31], Potato starch/lactucin- $\text{TiO}_2$  composite films [46].

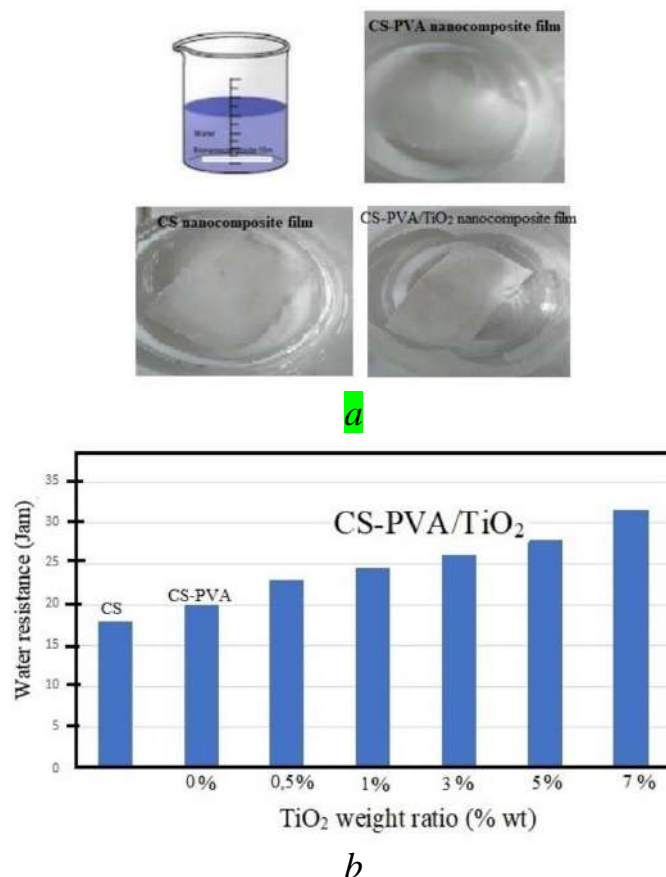

**Fig. 7.** Methods and analysis of water resistance: *a* – film testing method; *b* – results of water resistance testing of CS/PVA- $\text{TiO}_2$  nanocomposite films


Figure 6a has a bad quality.

### 3. 4. Water contact angle

Water contact angle measurements were carried out to evaluate the wettability of the surface of the film against water molecules. This is general information. It has to be deleted to prevent wasting the time of a reader. The CS/PVA composite film sample yielded a value of  $69.9^\circ$  indicating hydrophilic properties.

The hydrophilic properties increased due to the increase in polar groups such as C—O and —OH due to the mixing of PVA polymer with water-soluble properties. This increase in the —OH group increases the ability to form hydrogen bonds with water

molecules resulting in higher wettability. The decrease in the water contact angle on the surface of the starch/PVA film was in line with previous studies which was caused by an increase in the hydroxyl chains [34, 37, 38]. Meanwhile, the addition of  $\text{TiO}_2$  to the CS/PVA composite with the addition of 0.5 wt% to 7 wt%  $\text{TiO}_2$  nanoparticles showed a trend of increasing the contact angle of the film surface ( $70.8^\circ$ ,  $71.1^\circ$ ,  $74.3^\circ$ ,  $77.5^\circ$ ,  $83.6^\circ$ ) (Fig.8). The increase in contact angle was due to the distribution of  $\text{TiO}_2$  particles on the surface of the CS/PVA- $\text{TiO}_2$  nanocomposite films. The increase in the coarser surface structure of the film is the basis for increasing the hydrophobicity of the film. where, the results of this study are in line with previously reported studies [48, 49]. Rewrite the sentence.

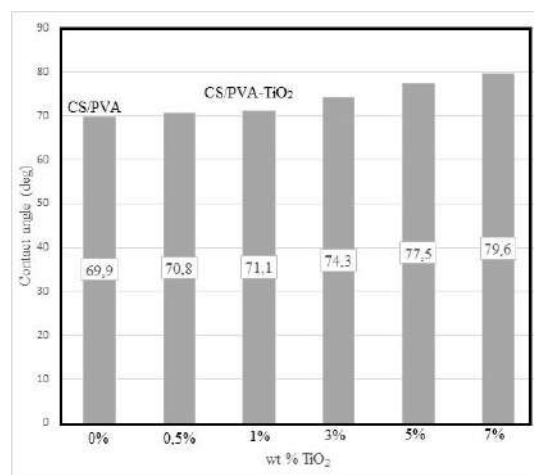


**Fig. 8.** The water contact angle of CS/PVA nanocomposite film vs CS/PVA- $\text{TiO}_2$  nanocomposite film

### 3. 5. Performance TENG of CS/PVA- $\text{TiO}_2$ nanocomposite films

The TENG current output mechanism can be divided into three stages (Fig. 9). In the first stage, at the initial position, the electrode A is parallel to the electret. In the second stage, the electret rotates the position of electrode A and electrode B parallel to the electret causes the charge on electrode A to be transferred to electrode B through an external load (resistor) and generate current and voltage across the load resistor during this working period. The third stage is the final state where electrode B is parallel to the electret. While the TENG output circuit uses a rectifier diode and a capacitor as electrical storage to convert AC to DC before being channeled to the ED load. Figure 2 has to be modified: figure 2c has to be presented here as figure 9. Next figures have to be shifted in numeration.

TENG performance measurements (Fig. 9) were carried out at different humidity levels (15%, and 95%), the rotor rotation speed was controlled stable ( $\omega = 200$  rad/s), and the load was  $50\text{M}\Omega$ . TENG output performance test with CS-PVA triboelectric film without  $\text{TiO}_2$  at low humidity level (RH, 15%), as shown in (Fig. 10). The results of the output voltage and current output voltage and current  $\sim 25.5$  V and  $\sim 3.6$   $\mu\text{A}$  without addition of  $\text{TiO}_2$  in CS-PVA nanocomposite matrix, are presented in (Fig. 10, a, b). Meanwhile, the addition of  $\text{TiO}_2$  in the weight ratio (0% to 7 % wt  $\text{TiO}_2$ ) showed a linear increase in voltage and current, respectively, as shown in (Fig. 10, a, b). The

optimal output voltage and current were achieved at a concentration of 3% wt  $\text{TiO}_2$  with a value of 112.5 V and 10.2  $\mu\text{A}$ . This increase in output voltage and current is due to an increase in the value of the dielectric constant due to the presence of  $\text{TiO}_2$  in the CS-PVA polymer mixture which can increase the triboelectric of the film. These results show similarities with some of the results of previous research reports, such as; an increase in dielectric properties of Poly (Vinylidene Fluoride) film with  $\text{TiO}_2$  NP deposition [9],  $\text{TiO}_2$  doping on Portland Cement [46], Dielectric constant changes linearly as a function of weight ratio of PDMS embedded  $\text{TiO}_x$  NP [10], natural rubber (NR)- $\text{TiO}_2$  [11].

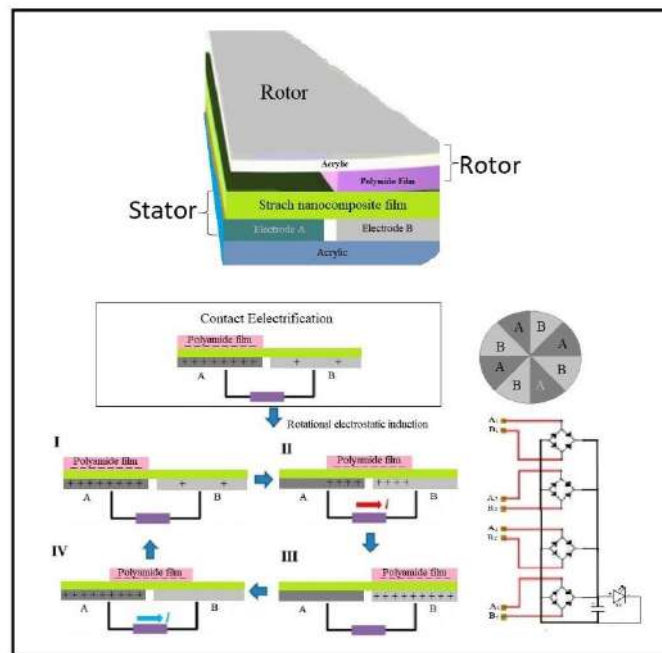


**Fig. 9.** Measurement of rotary disc freestanding TENG (RDF-TENG) with electrode components A, and B using copper tape thickness 1 mm, and electronic components (bridge diode 1A 500V), electrolytic capacitor 1000uF 16V, Light Emitting Diode lamp voltage 2,5 V). What electronic components' parameters were used (diode bridges, capacitor, LED?)


In addition, the effect of differences in relative humidity factors (RH, 15%, and 95%) on the output performance of CS/PVA- $\text{TiO}_2$  film-based TENG at a weight ratio above 3 %  $\text{TiO}_2$  shows that the resulting voltage and current increase are directly correlated with increased humidity levels (**Fig. 10**). The output performance of TENG when the relative humidity condition 15% showed an output voltage  $\sim 112.5$  V and current  $\sim 10.2$   $\mu\text{A}$  (**Fig. 10, a, b**). Enhanced relative humidity of the cylinder chamber is carried out by continuously injecting wet air into the closed cylinder chamber to increase the humidity 95% (as shown in **Fig. 9**). Under conditions of relatively high humidity (95%), TENG can produce  $\sim 180$  V and current from  $\sim 13.7$   $\mu\text{A}$ . However, the TENG output voltage and current increase was lower at a  $\text{TiO}_2$  weight ratio of less than 3 %, as shown in (**Fig. 11**). Meanwhile, the increase in TENG optimal output voltage and current when humidity is high (RH, 95%) with a concentration of 7%  $\text{TiO}_2$  wt can



reach 1.6-fold from  $\sim 112.5$  V to  $\sim 180$  V, and the current increases 1.4-fold from  $\sim 10.2$   $\mu\text{A}$  to  $\sim 13.7$   $\mu\text{A}$  (**Fig. 10**), and (**Fig. 11**). The output voltage and current of RDF-TENG when the humidity is 15% are presented in **Fig. 10**, and the humidity is 95% are presented in **Fig. 11**.

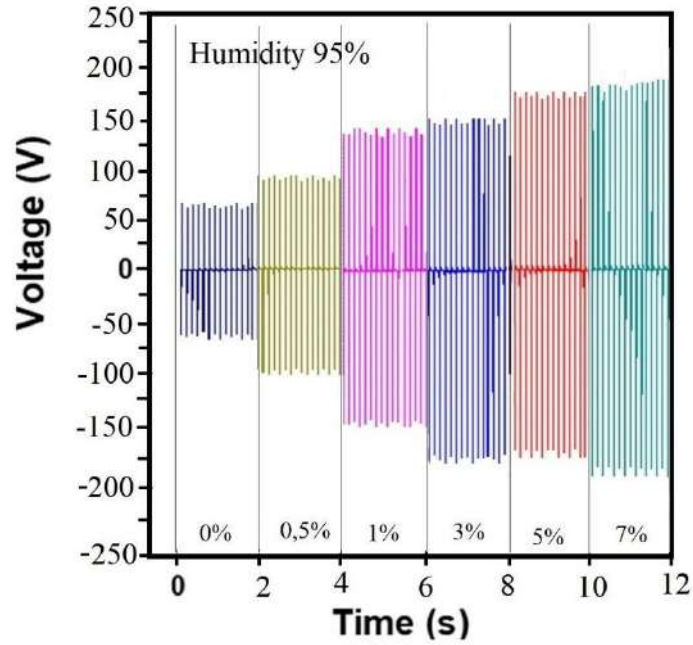


*a*

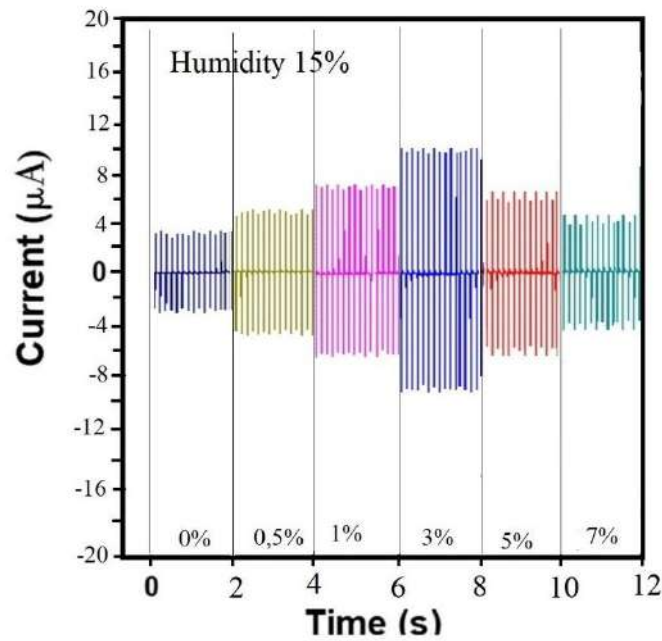


*b*

**Fig. 10.** Performance RDF-TENG at humidity 15%: *a* – open circuit output voltage ( $V_{oc}$ ); *b* – closed circuit output current ( $I_{sc}$ )

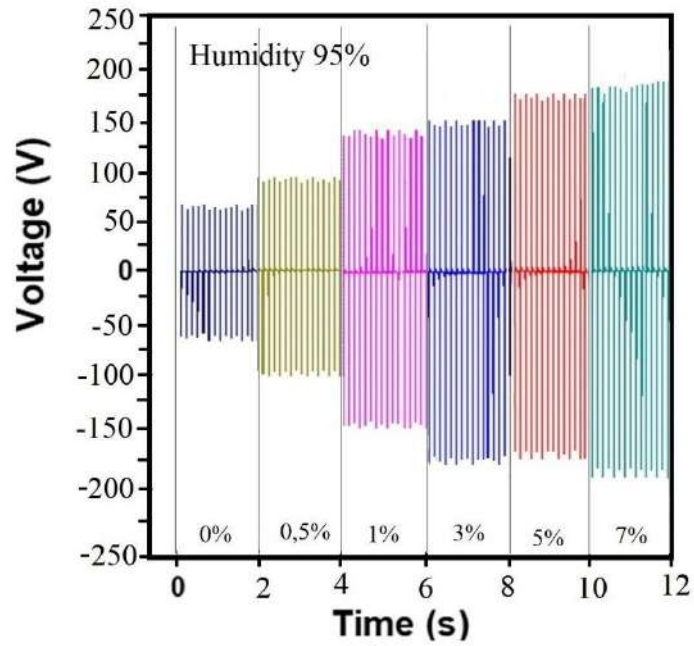

*a*

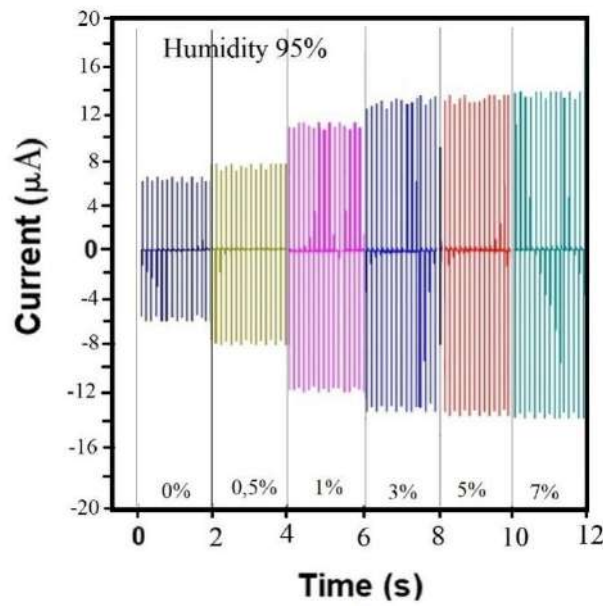

*b*

*b*

**Fig. 11.** Performance RDF-TENG at humidity 95 %: *a* – open circuit output voltage ( $V_{oc}$ ); *b* – closed circuit output current ( $I_{sc}$ )

The increase in RDF-TENG output voltage and current is caused by the formation of hydrogen bonds between hydroxyl groups and water molecules (when humidity is high) on the surface of the CS-PVA/TiO<sub>2</sub> nanocomposite film increasing the positive triboelectrification properties of the film. This is not much different from the research reported by Wang et al. using starch polymers rich in hydroxyl groups with the formation of hydrogen bonds with water molecules when humidity is high can increase

the output current of RDF-TENG based starch films [50]. PVA film is rich in hydroxyl chains and can increase the number of hydroxyl chains when mixed with starch molecules. In this case, it can bind more water molecules when the humidity is high and increase participation in triboelectric charging. The results of this study are also in line with previous studies using hydroxyl-rich biofilms, at high humidity of 95% a water molecule bonds with the hydroxyl through hydrogen bonds which increases the generation of charge when the two films rub together and increases RDF-TENG work [51].

#### **4. Conclusions**

We developed a cassava starch (CS)/PVA-TiO<sub>2</sub> nanocomposite film using the solvent casting method for the application of the RDF-TENG triboelectric film. The addition of TiO<sub>2</sub> to the CS/PVA polymer composite from the SEM and XRD tests showed that the TiO<sub>2</sub> nanoparticles were evenly incorporated into the CS/PVA polymer matrix, and affected the crystal structure of the film. In addition, the presence of TiO<sub>2</sub> nanoparticles in the CS/PVA polymer resulted in an increase in Tensile Strength of 19.11 Mpa for a 0.5% wt TiO<sub>2</sub> sample, and an optimal Tensile Strength of 21.20 MPa with a concentration of 1% wt TiO<sub>2</sub> but the elongation at break value of the nanocomposite film CS/PVA-TiO<sub>2</sub> decreased. In addition, the effect of TiO<sub>2</sub> particles increases water resistance and decreases water wettability with an increase in the water contact angle of 83.60 at a concentration of 7% wt TiO<sub>2</sub> which means an increase in hydrophobic properties. The performance of RDF-TENG films without the addition of TiO<sub>2</sub> on the CS-PVA nanocomposite matrix resulted in an output voltage and current of ~25.5 V and ~3.6  $\mu$ A, and the performance RDF-TENG increased optimally with the addition of 3% TiO<sub>2</sub> with an increase in the output voltage of 4.4-fold, and current 2.8-fold. while performance under different humidity conditions (15% and 95% RH) output voltage increased 1.6-fold and current increased 1.4-fold with output voltage and current from ~112.5 V to ~180 V and current respectively from ~10.2  $\mu$ A to ~13.7  $\mu$ A. The increase was caused by the interaction of hydroxyl groups and water molecules through hydrogen bonds and the availability of free oxygen due to the distribution of TiO<sub>2</sub> particles which increased the positive triboelectrification properties of the film. The performance of RDF TENG with low rotation and small torque has shown a relatively constant conversion efficiency. This is different from other rotational power generation machines, such as electromagnetic generators (EMG) which require high rotation and large torque to improve conversion efficiency. This provides an alternative solution for energy conversion models especially low mechanical energy by using triboelectric nanogenerator models.

In addition, I suggest authors compare electrical engine power for rotation and RDF-TENG output energy in order to find the efficiency evaluation coefficient. This illustrates transformation efficiency.

#### **Conflict of interest**

The authors declare no conflict of interest. The funders had no role in research design; in the collection, analysis, or interpretation of data, in the writing of the manuscript which may influence the work reported in this paper, or in the decision to

publish its results.

### **Financing**

This work is supported and funded by the Institute for Research and Community Service, Universitas Negeri Surabaya (Unesa), with a grant contract number B/37502/2022.

### **Data availability**

Manuscript has data included as electronic supplementary material, in a data repository; <https://github.com/arisansori/Supplementary-Materials-.git>

### **Acknowledgements**

We gratefully acknowledge the support of the Surabaya State University (Unesa) Research and Community Service Institute, for research funding with a grant contract number: B/37502/2022. We are also grateful for the technical support from the Energy Conversion Laboratory at the Department of Mechanical Engineering, University Brawijaya, Central Laboratory of Life Sciences, University Brawijaya, and Advanced Mineral & Material Central Laboratory FMIPA, State University of Malang.

### **References**

- [1] G. I. Dzhardimalieva, B. C. Yadav, T. V. Lifintseva, and I. E. Uflyand, "Polymer chemistry underpinning materials for triboelectric nanogenerators (TENGs): Recent trends," *Eur. Polym. J.*, vol. 142, p. 110163, 2021, doi: 10.1016/j.eurpolymj.2020.110163.
- [2] J. Wang *et al.*, "Achieving ultrahigh triboelectric charge density for efficient energy harvesting," *Nat. Commun.*, vol. 8, no. 1, pp. 1–7, 2017, doi: 10.1038/s41467-017-00131-4.
- [3] K. Xia, J. Fu, and Z. Xu, "Multiple-Frequency High-Output Triboelectric Nanogenerator Based on a Water Balloon for All-Weather Water Wave Energy Harvesting," *Adv. Energy Mater.*, vol. 10, no. 28, pp. 1–9, 2020, doi: 10.1002/aenm.202000426.
- [4] G. Song *et al.*, "Molecularly Engineered Surface Triboelectric Nanogenerator by Self-Assembled Monolayers (METS)," *Chem. Mater.*, vol. 27, no. 13, pp. 4749–4755, 2015, doi: 10.1021/acs.chemmater.5b01507.
- [5] S. Mallakpour and N. Jarang, "Mechanical, thermal and optical properties of nanocomposite films prepared by solution mixing of poly(vinyl alcohol) with titania nanoparticles modified with citric acid and Vitamin C," *J. Plast. Film Sheeting*, vol. 32, no. 3, pp. 293–316, 2016, doi: 10.1177/8756087915597024.
- [6] Khushboo and P. Azad, *Design and implementation of conductor-to-dielectric lateral sliding TENG mode for low power electronics*, vol. 698, no. May. Springer Singapore, 2019.
- [7] H. W. Park *et al.*, "Electron blocking layer-based interfacial design for highly-enhanced triboelectric nanogenerators," *Nano Energy*, vol. 50, pp. 9–15, 2018, doi: 10.1016/j.nanoen.2018.05.024.
- [8] P. Trihutomo, Marji, M. Harly, B. A. Wahyudi, and M. B. Radja, "the

Effect of Clathrin Protein Addition on Increasing the Number of Electrons in Organic Dye-Sensitized Solar Cell (Dssc)," *EUREKA, Phys. Eng.*, vol. 2022, no. 2, pp. 15–27, 2022, doi: 10.21303/2461-4262.2022.001957.

[9] P. Kum-onsa *et al.*, "Gold-nanoparticle-deposited TiO<sub>2</sub> nanorod/poly(Vinylidene fluoride) composites with enhanced dielectric performance," *Polymers (Basel)*, vol. 13, no. 13, pp. 1–14, 2021, doi: 10.3390/polym13132064.

[10] N. D. Huynh, H. Park, K. Chung, and D. Choi, "Effect on TENG Performance by Phase Control of TiO<sub>x</sub> Nanoparticles," *Compos. Res.*, vol. 31, no. 6, pp. 365–370, 2018.

[11] W. Bunriw, V. Harnchana, C. Chanthad, and V. N. Huynh, "Natural rubber-TiO<sub>2</sub> nanocomposite film for triboelectric nanogenerator application," *Polymers (Basel)*, vol. 13, no. 13, pp. 1–12, 2021, doi: 10.3390/polym13132213.

[12] Y. Wang, L. Zhang, and A. Lu, "Highly stretchable, transparent cellulose/PVA composite hydrogel for multiple sensing and triboelectric nanogenerators," *J. Mater. Chem. A*, vol. 8, no. 28, pp. 13935–13941, 2020, doi: 10.1039/d0ta02010a.

[13] K. Shi, X. Huang, B. Sun, Z. Wu, J. He, and P. Jiang, "Cellulose/BaTiO<sub>3</sub> aerogel paper based flexible piezoelectric nanogenerators and the electric coupling with triboelectricity," *Nano Energy*, vol. 57, pp. 450–458, 2019, doi: 10.1016/j.nanoen.2018.12.076.

[14] X. Chen, A. Yusuf, J. S. del Rio, and D. Y. Wang, "A facile and robust route to polyvinyl alcohol-based triboelectric nanogenerator containing flame-retardant polyelectrolyte with improved output performance and fire safety," *Nano Energy*, vol. 81, p. 105656, 2021, doi: 10.1016/j.nanoen.2020.105656.

[15] R. Singh and H. W. Rhee, "The rise of bio-inspired energy devices," *Energy Storage Mater.*, vol. 23, no. February, pp. 390–408, 2019, doi: 10.1016/j.ensm.2019.04.030.

[16] Z. Zhu, K. Xia, Z. Xu, H. Lou, and H. Zhang, "Starch Paper-Based Triboelectric Nanogenerator for Human Perspiration Sensing," *Nanoscale Res. Lett.*, vol. 13, pp. 4–9, 2018, doi: 10.1186/s11671-018-2786-9.

[17] Y. Chi *et al.*, "Rice paper-based biodegradable triboelectric nanogenerator," *Microelectron. Eng.*, vol. 216, no. June, p. 111059, 2019, doi: 10.1016/j.mee.2019.111059.

[18] V. Gots, P. Palchyk, and O. Berdnyk, "Investigation of Properties of Modified Basalt Fibers," *EUREKA Phys. Eng.*, vol. 4, no. 4, pp. 43–48, 2018, doi: 10.21303/2461-4262.2018.00673.

[19] R. Ccorahua, J. Huaroto, C. Luyo, M. Quintana, and E. A. Vela, "Enhanced-performance bio-triboelectric nanogenerator based on starch polymer electrolyte obtained by a cleanroom-free processing method," *Nano Energy*, vol. 59, no. March, pp. 610–618, 2019, doi: 10.1016/j.nanoen.2019.03.018.

[20] L. Shi *et al.*, "Enhanced performance triboelectric nanogenerators based on solid polymer electrolytes with different concentrations of cations," *Nano Energy*, vol. 64, no. August, p. 103960, 2019, doi: 10.1016/j.nanoen.2019.103960.

[21] J. Shen, Z. Li, J. Yu, and B. Ding, "Humidity-resisting triboelectric nanogenerator for high performance biomechanical energy harvesting," *Nano Energy*,

vol. 40, pp. 282–288, 2017, doi: 10.1016/j.nanoen.2017.08.035.

[22] R. Ccorahua, A. Cordero, C. Luyo, M. Quintana, and E. Vela, “Starch-Cellulose-Based Triboelectric Nanogenerator Obtained by a Low-Cost Cleanroom-Free Processing Method,” *MRS Adv.*, vol. 4, no. 23, pp. 1315–1320, 2019, doi: 10.1557/adv.2018.652.

[23] F. G. Torres, O. P. Troncoso, C. Torres, D. A. Díaz, and E. Amaya, “Biodegradability and mechanical properties of starch films from Andean crops,” *Int. J. Biol. Macromol.*, vol. 48, no. 4, pp. 603–606, 2011, doi: 10.1016/j.ijbiomac.2011.01.026.

[24] J. Y. Kim, Y. G. Choi, S. R. Byul Kim, and S. T. Lim, “Humidity stability of tapioca starch-pullulan composite films,” *Food Hydrocoll.*, vol. 41, pp. 140–145, 2014, doi: 10.1016/j.foodhyd.2014.04.008.

[25] R. Ccorahua, J. Huaroto, C. Luyo, M. Quintana, and E. A. Vela, “Enhanced-performance bio-triboelectric nanogenerator based on starch polymer electrolyte obtained by a cleanroom-free processing method,” *Nano Energy*, vol. 59, pp. 610–618, 2019, doi: 10.1016/j.nanoen.2019.03.018.

[26] B. Ben Doudou, A. Vivet, J. Chen, A. Laachachi, T. Falher, and C. Poilâne, “Hybrid carbon nanotube - Silica/ polyvinyl alcohol nanocomposites films: Preparation and characterisation,” *J. Polym. Res.*, vol. 21, no. 4, 2014, doi: 10.1007/s10965-014-0420-9.

[27] Fei P, Shi Y, Zhou M, Cai J, Tang S, Xiong H. Effects of nano-TiO<sub>2</sub> on the properties and structures of starch/poly( $\epsilon$ -caprolactone) composites. *J Appl Polym Sci*, vol. 130, no.6, pp. 4129-4136, 2013, doi:10.1002/app.39695

[28] J. Alvarez-Ramirez, J. Vazquez-Arenas, A. García-Hernández, and E. J. Vernon-Carter, “Improving the mechanical performance of green starch/glycerol/Li + conductive films through cross-linking with Ca<sup>2+</sup>,” *Solid State Ionics*, vol. 332, no. November 2018, pp. 1–9, 2019, doi: 10.1016/j.ssi.2019.01.002.

[29] M. Zamanian, H. Sadriani, M. Khojastehpour, F. Hosseini, and J. Thibault, “Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties of PVA films,” *J. Membr. Sci. Res.*, vol. 7, no. 2, pp. 67–73, 2021, doi: 10.22079/JMSR.2020.112911.1283.

[30] N. E. Kochkina and O. A. Butikova, “Effect of fibrous TiO<sub>2</sub> filler on the structural, mechanical, barrier and optical characteristics of biodegradable maize starch/PVA composite films,” *Int. J. Biol. Macromol.*, vol. 139, pp. 431–439, 2019, doi: 10.1016/j.ijbiomac.2019.07.213.

[31]. A. Oleyaei, H. Almasi, B. Ghanbarzadeh, and A. A. Moayedi, *Synergistic reinforcing effect of TiO<sub>2</sub> and montmorillonite on potato starch nanocomposite films: Thermal, mechanical and barrier properties*, vol. 152. Elsevier Ltd., 2016.

[32] A. M. Abdullah, S. B. Aziz, and S. R. Saeed, “Structural and electrical properties of polyvinyl alcohol (PVA):Methyl cellulose (MC) based solid polymer blend electrolytes inserted with sodium iodide (NaI) salt,” *Arab. J. Chem.*, vol. 14, no. 11, p. 103388, 2021, doi: 10.1016/j.arabjc.2021.103388.

[33] A. D. Adamu, S. S. Jikan, B. H. A. Talip, N. A. Badarulzaman, and S. Yahaya, “Effect of glycerol on the properties of tapioca starch film,” *Mater. Sci. Forum*, vol. 888 MSF, pp. 239–243, 2017, doi:

10.4028/www.scientific.net/MSF.888.239.

[34] H. Abral, A. Hartono, F. Hafizulhaq, D. Handayani, E. Sugiarti, and O. Pradipta, "Characterization of PVA/cassava starch biocomposites fabricated with and without sonication using bacterial cellulose fiber loadings," *Carbohydr. Polym.*, vol. 206, pp. 593–601, 2019, doi: 10.1016/j.carbpol.2018.11.054.

[35] R. Surudžić *et al.*, "Physico-chemical and mechanical properties and antibacterial activity of silver/poly(vinyl alcohol)/graphene nanocomposites obtained by electrochemical method," *Compos. Part B Eng.*, vol. 85, pp. 102–112, 2016, doi: 10.1016/j.compositesb.2015.09.029.

[36] Tian, J. Yan, A. V. Rajulu, A. Xiang, and X. Luo, "Fabrication and properties of polyvinyl alcohol/starch blend films: Effect of composition and humidity," *Int. J. Biol. Macromol.*, vol. 96, pp. 518–523, 2017, doi: 10.1016/j.ijbiomac.2016.12.067.

[37] S. Patil *et al.*, "Effect of polymer blending on mechanical and barrier properties of starch-polyvinyl alcohol based biodegradable composite films," *Food Biosci.*, vol. 44, no. PA, p. 101352, 2021, doi: 10.1016/j.fbio.2021.101352.

[38] N. E. Kochkina and O. A. Butikova, "Effect of fibrous TiO<sub>2</sub> filler on the structural, mechanical, barrier and optical characteristics of biodegradable maize starch/PVA composite films," *Int. J. Biol. Macromol.*, vol. 139, pp. 431–439, 2019, doi: 10.1016/j.ijbiomac.2019.07.213.

[39] A. Garbuz, P. Bilym, and D. Zubenko, "Features of Changes of Structure and Adhesive Properties for Acrylic Adhesives Under the Influence of the Filler," *EUREKA Phys. Eng.*, vol. 3, no. 3, pp. 13–16, 2016, doi: 10.21303/2461-4262.2016.00075.

[40] A. A. Khalaf, S. A. Abed, S. S. Alkhfaji, M. A. Al-Obaidi, and M. M. Hanon, "the Effect of Adding Natural Materials Waste on the Mechanical Properties and Water Absorption of Epoxy Composite Using Grey Relations Analysis," *EUREKA, Phys. Eng.*, no. 1, pp. 131–142, 2022, doi: 10.21303/2461-4262.2022.001952.

[41] J. Alvarez-Ramirez, J. Vazquez-Arenas, A. García-Hernández, and E. J. Vernon-Carter, "Improving the mechanical performance of green starch/glycerol/Li + conductive films through cross-linking with Ca<sup>2+</sup>," *Solid State Ionics*, vol. 332, no. November 2018, pp. 1–9, 2019, doi: 10.1016/j.ssi.2019.01.002.

[42] M. Ji *et al.*, "Enhanced mechanical properties, water resistance, thermal stability, and biodegradation of the starch-sisal fibre composites with various fillers," *Mater. Des.*, vol. 198, p. 109373, 2021, doi: 10.1016/j.matdes.2020.109373.

[43] P. Bergo, P. J. A. Sobral, and J. M. Prison, "Effect of glycerol on physical properties of cassava starch films," *J. Food Process. Preserv.*, vol. 34, no. SUPPL. 2, pp. 401–410, 2010, doi: 10.1111/j.1745-4549.2008.00282.x.

[44] A. D. Adamu, S. S. Jikan, B. H. A. Talip, N. A. Badarulzaman, and S. Yahaya, "Effect of glycerol on the properties of tapioca starch film," *Mater. Sci. Forum*, vol. 888 MSF, pp. 239–243, 2017, doi: 10.4028/www.scientific.net/MSF.888.239.

[45] Y. Wang *et al.*, "Development and characterization of potato starch/lactucin/nano-TiO<sub>2</sub> food packaging for sustained prevention of mealworms," *Food Packag. Shelf Life*, vol. 33, p. 100837, Sep. 2022, doi: 10.1016/J.FPSL.2022.100837.



[46] J. Sintusiri, V. Harnchana, V. Amornkitbamrung, A. Wongsas, and P. Chindaprasirt, "Portland Cement-TiO<sub>2</sub> triboelectric nanogenerator for robust large-scale mechanical energy harvesting and instantaneous motion sensor applications," *Nano Energy*, vol. 74, no. January, p. 104802, 2020, doi: 10.1016/j.nanoen.2020.104802.

[47] H. W. Park *et al.*, "Effects of embedded TiO<sub>2</sub>-x nanoparticles on triboelectric nanogenerator performance," *Micromachines*, vol. 9, no. 8, 2018, doi: 10.3390/mi9080407.

[48] M. Zamanian, H. Sadrnia, M. Khojastehpour, F. Hosseini, and J. Thibault, "Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties of PVA films," *J. Membr. Sci. Res.*, vol. 7, no. 2, pp. 67–73, 2021, doi: 10.22079/JMSR.2020.112911.1283.

[49] L. Rong, M. Shen, H. Wen, Y. Ren, W. Xiao, and J. Xie, "Preparation and characterization of hyacinth bean starch film incorporated with TiO<sub>2</sub> nanoparticles and Mesona chinensis Benth polysaccharide," *Int. J. Biol. Macromol.*, vol. 190, no. 235, pp. 151–158, 2021, doi: 10.1016/j.ijbiomac.2021.08.180.

[50] N. Wang *et al.*, "New Hydrogen Bonding Enhanced Polyvinyl Alcohol Based Self-Charged Medical Mask with Superior Charge Retention and Moisture Resistance Performances," *Adv. Funct. Mater.*, vol. 31, no. 14, pp. 1–14, 2021, doi: 10.1002/adfm.202009172.

[51] N. Wang, Y. Zheng, Y. Feng, F. Zhou, and D. Wang, "Biofilm material based triboelectric nanogenerator with high output performance in 95% humidity environment," *Nano Energy*, vol. 77, p. 105088, 2020, doi: 10.1016/j.nanoen.2020.105088.

Review ke 3, 15 maret 2023

I have only one remark. You must add subsection **3.4. Limitations of the study and development prospects**. In this subsection you need report about:

- the limitations of this study can be indicated and must be taken into account when trying to apply in practice, as well as in further theoretical studies (everything that will contribute to understanding the real limits and conditions for the application of the proposed solutions and / or the results obtained with their use),
- in what direction should the study be developed?

Received date: 08.11.2022

Accepted date:

Section: *Materials Science*

**ENHANCED MECHANICAL AND WATER RESISTANCE PROPERTIES OF  
CASSAVA STARCH-PVA NANOCOMPOSITES WITH TiO<sub>2</sub> NANOFILLERS  
FOR TRIBOELECTRIC NANOGENERATORS FILMS**

***Aris Ansori***

**Corresponding author**

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str., Malang, Indonesia, 65145*

*Department of Mechanical engineering*

*Universitas Negeri Surabaya*

*Ketintang str, Surabaya, Indonesia 60231*

*arisansori@unesa.ac.id*

*ORCID: orcid.org/0000-0001-8760-5093*

***Sudjito Soeparman***

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str, Malang, Indonesia, 65145*

*sudjitospn@ub.ac.id*

*ORCID: orcid.org/0000-0003-3490-7543*

***Denny Widhiyanuriyawan***

*Department of Mechanical Engineering*

*Brawijaya University*

*Veteran str, Malang, Indonesia, 65145*

*denny\_w@ub.ac.id*

*ORCID: orcid.org/0000-0001-5729-4212*

**Teguh Dwi Widodo**  
*Department of Mechanical Engineering*  
*Brawijaya University*  
*Veteran str, Malang, Indonesia, 65145*  
*widodoteguhdwi@ub.ac.id*  
*ORCID: orcid.org/0000-0002-7005-7315*

Author's order	First Name	Middle name	Last Name
1	Aris		Ansori
2	Sudjito		Soeparman
3	Denny		Widhiyanuriyawan
4	Teguh	Dwi	Widodo

## Abstract

The utilization of biopolymers for energy applications continues to attract researchers, due to the unique properties of biopolymers that are easily modified, such as cassava starch (CS) biopolymer which has hydroxyl molecular chains. However, the brittle, and non-waterproof nature of starch films is an obstacle to their use in triboelectric nanogenerator (TENG) solid-solid films. This study aims to improve the physicochemical properties of cassava starch films by modifying them into nanocomposite films. The nanocomposite film was made from 70:30 CS/polyvinyl alcohol (PVA) composite and variation of TiO<sub>2</sub> nanoparticles addition using solvent casting method. The results showed that the mechanical properties of cassava starch film increased with the addition of PVA. Meanwhile, the addition of TiO<sub>2</sub> above 1 wt% of the mechanical properties of the film tends to decrease. The film has low wettability properties with a contact angle of 83.6°. The performance of the nanocomposite film as a Rotary disc freestanding film (RDF-TENG) produces 4.4-fold the output voltage and 2.8-fold the current compared to the film without TiO<sub>2</sub>. This is a new finding that the CS/PVA-TiO<sub>2</sub> nanocomposite film has the potential for TENG films in high-humidity environmental conditions.

**Keywords:** nanocomposite film, TiO<sub>2</sub>, film properties, performance, the triboelectric nanogenerator

## 1. Introduction

Triboelectric nanogenerator (TENG) is a micro/nano energy harvesting device that converts the mechanical energy of the surrounding environment into electrical energy based on the triboelectricity effect between two materials that have different electronegativity levels and has been proven to be effective and efficient [1]. TENG working principles based on contact electrification and electrostatic induction make a self-powered system with high efficiency, low cost, abundant mechanical energy source, and high output [2, 3]. TENG was first developed by Wang et al. in 2013, The research was carried out by utilizing the triboelectric effect of materials to harvest mechanical energy into electricity and showed high energy conversion efficiency [4].

TENG has become one of the promising energy conversion devices to convert mechanical energy into electrical energy due to the capacity of triboelectric materials.

The TENG device generally consists of two friction materials and electrodes at the top and bottom of the device. Physical contact between two friction materials with different levels of electronegativity can induce a triboelectric charge which can produce a potential decrease when separated by mechanical forces and increase the flow of electrons between the electrodes via an external circuit. The dominant factor that determines the performance of TENG's output is the TENG friction material, such as; the use of nanocomposite friction materials on a nanoscale which has the advantages of mechanical strength, toughness, flexibility, transparency, dielectric, thermal or electrical conductivity properties which show an effective and efficient TENG performance improvement [5, 6].

However, TENG triboelectric nanocomposite films are still dominated by synthetic polymers which require a complicated, long, and expensive fabrication process. such as; PDMS nanocomposite films with  $\text{TiO}_2$  deposition can cause changes in oxygen vacancies on the PDMS surface which can contribute to electron exchange and trapping and have an impact on increasing TENG output power [7], DSSC output power [8], Poly (vinylidene fluoride) (PVDF) polymer with  $\text{TiO}_2$  NPs as filler can improve the dielectric properties [9], Polydimethylsiloxane (PDMS) with different  $\text{TiO}_x$  weight ratios as a function of dielectric constant control with 5% rutile  $\text{TiO}_x$  and 7%  $\text{TiO}_x$  anatase phase produces TENG output highest  $\sim 180 \text{ V}/8,2 \mu\text{A}$  and  $211,6 \text{ V}/8,7 \mu\text{A}$  [10].

Biodegradable devices are in great demand because of the abundant raw materials available, low cost, simple process, and environmentally friendly. Various natural biodegradable materials, such as; natural rubber [11], cellulose [12, 13], chitosan, polyvinyl alcohol (PVA) [14], rice paper, and starch paper have been used to make biodegradable TENGs [15–17], and environmentally friendly raw materials and do not cause harmful effects on humans and the environment [18]. The use of starch has begun to be developed for the TENG triboelectric film because it has properties such as; biocompatible and biodegradable [16, 19–22], abundant availability, easy process, inexpensive, possessing hydroxyl groups, amorphous crystal structure, and rheological properties can provide the required resistance for TENG triboelectric film applications [23].

Meanwhile, previous studies showed high performance of TENG based on starch biofilm, such as; TENG-based, due to the binding of water molecules and hydroxyl groups through hydrogen bonds [21]. TENG-based potato starch biofilm exhibits high output voltages from 60 mV to 300 mV per  $4 \text{ cm}^2$  area, but the surface of the film is prone to cracking at several duty cycles [22]. Tapioca starch film rich in hydroxyl groups can enhance the triboelectric effect by binding water molecules on the friction film surface through hydrogen bonding [24]. The use of starch polymer electrolyte film made from a mixture of potato starch and 0.5%  $\text{CaCl}_2$  showed an increase in voltage output three times higher than pure starch from 0.4 V to 1.2 V. Starch polymer electrolyte between potato starch and 0,5%  $\text{CaCl}_2$  showed an increase in voltage output three times higher than pure starch from 0.4 v to 1.2 V [25].

However, the strong hydrophilicity of starch causes poor mechanical properties and easily soluble in prolonged contact with water. This becomes a bottleneck for starch films for TENG biodegradable applications that require long-term stability.

Therefore, to increase the functionality of starch by modifying starch into nanocomposite films. In this study, we fabricated a starch-based nanocomposite film, by synthesizing cassava starch/PVA-TiO<sub>2</sub> into a nanocomposite film. Our knowledge, the use of TiO<sub>2</sub> as a filler in starch composites to improve mechanical properties and water resistance for Biodegradable TENG has never been reported. Meanwhile, the addition of PVA to starch polymers as a composite matrix can help the formation of polymer composite bonds through hydrogen bonding and increase the number of hydroxyl groups. [26]. The use of TiO<sub>2</sub> nanofiller which is an inorganic nanoparticle with a large specific surface area and high surface energy can result in some -OH groups or dangling bonds contained in the biopolymer matrix that can be adsorbed on the nano-TiO<sub>2</sub> surface, which can affect the physical characteristics of the natural polymer/composite properties. In addition, the formation of hydrogen bonds and C-O-Ti bonds between starch matrices and TiO<sub>2</sub> can help the dispersion of TiO<sub>2</sub> as a filler in starch matrices which can improve the compatibility between starch and TiO<sub>2</sub> [27].

Meanwhile, the special emphasis of this study is to investigate the effect of TiO<sub>2</sub> in CS/PVA polymer blends on mechanical properties, water resistance, and TENG characterization with CS/PVA-TiO<sub>2</sub> nanocomposite films as positive friction surfaces. We analyze the performance TENG of CS/PVA-TiO<sub>2</sub> nanocomposite films and the changes in properties of CS/PVA nanocomposite films with different concentrations of TiO<sub>2</sub> nanofillers.

The improvement in tensile strength and elongation at break of CS/PVA composite films is due to the high mechanical properties of PVA. In addition, the water resistance property was improved with the formation of more OH groups. Meanwhile, the effect of TiO<sub>2</sub> addition in CS/PVA composite increases the rigidity of the molecular chain with the help of hydrogen and covalent bonds, the elasticity of the molecular chain decreases which causes the elongation at break value to tend to decrease with the increase of TiO<sub>2</sub> concentration in the CS/PVA matrix. The presence of TiO<sub>2</sub> makes the more dense film, thus increasing the absorption of water molecules so that the film is not easily damaged.

Meanwhile, the performance of RDF-TENG nanocomposite CS/PVA film produced an output voltage and current of ~25.5 V and ~3.6  $\mu$ A. The effect of TiO<sub>2</sub> addition on the performance of RDF-TENG film of CS/PVA-TiO<sub>2</sub> nanocomposite was optimally improved by the addition of 3% TiO<sub>2</sub> which resulted in 4.4 times the output voltage and 2.8 times the current compared to the TENG film of CS/PVA without TiO<sub>2</sub> nano-filler. Therefore, these CS/PVA-TiO<sub>2</sub> nanocomposite films have the potential for TENG films under high-humidity environmental conditions.

## **2. Materials and methods**


### **2.1. Materials**

Materials starch used in the experiment is cassava starch produced by PT. Budi starch & Sweetener. Tbk. in Indonesia, Polyvinyl Alcohol (PVA) with an average molecular weight of  $M_w = 89,000\text{--}98,000$ , was procured from Sigma Aldrich, Anatase TiO<sub>2</sub> nanoparticles with a particle size of 20 nm were purchased from Sigma-Aldrich, glycerol (99% purity, clear, colorless, and density: 1.261 g/cm<sup>3</sup>) from Merck, distilled water specification; PH 8, resistivity >200 K $\Omega$ , conductivity <5  $\mu$ S/cm, Copper tape

type dual side conductor (adhesive side and conductive outside side) and thickness 0,5 mm.

## 2. 2. Preparation of cassava starch (CS)/PVA-TiO<sub>2</sub> nanocomposite

**Fig. 1** Describes making cassava starch (CS)/PVA-TiO<sub>2</sub> nanocomposite using the solvent casting method.

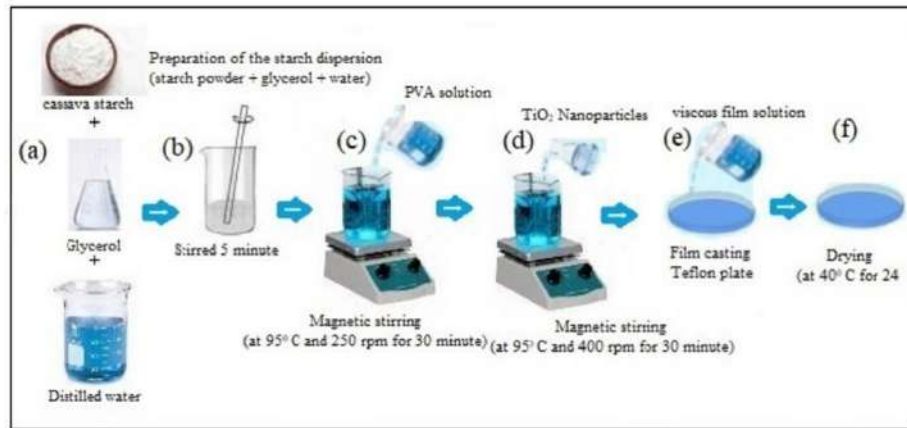

**Fig. 1.** Preparation of CS/PVA-TiO<sub>2</sub> nanocomposite films

Preparation of CS/PVA-TiO<sub>2</sub> nanocomposite films by solvent casting method as shown in **Fig. 1**. by steps; (a). making a solution of cassava starch (CS), with a composition of cassava starch (4.2 g), and glycerol (3 g) as plasticizer dispersed with distilled water (50 mL) in borosilicate glass, (b). The solution of cassava starch (CS), and glycerol was mechanically stirred for 5 minutes until the solution was completely homogeneous, (c). cassava starch solution (CS) was stirred with a magnetic stirrer at a speed of 250 rpm at a temperature of 95 °C for 30 minutes to obtain a gelatinized starch suspension and added PVA solution while stirring continuously (250 rpm) for 30 minutes until it dissolved completely and a clear solution was formed, (d). CS/PVA clear solution was added with TiO<sub>2</sub> nanoparticles (0.5, 1, 3, 5, 7 % wt), (e). CS/PVA-TiO<sub>2</sub> nanocomposite films were cast with a Teflon mold diameter of 100 mm, (f). The drying of the film was carried out in a hot air oven at 40 °C for 24 hours. Meanwhile, the composition ratio of Cassava starch (CS), PVA, and TiO<sub>2</sub> for nanocomposite film samples are presented in **Table 1**.

**Table 1**

Composition of The Various Film Nanocomposite Samples

Nanocomposite Sample	Composition		
	Cassava strach (CS)	PVA	TiO <sub>2</sub> ( % wt)
CS-PVA	70	30	0
CS-PVA/0,5 TiO <sub>2</sub> wt%	70	30	0,5
CS-PVA/1 TiO <sub>2</sub> wt%	70	30	1
CS-PVA/3 TiO <sub>2</sub> wt%	70	30	3
CS-PVA/5 TiO <sub>2</sub> wt%	70	30	5
CS-PVA/7 TiO <sub>2</sub> wt%	70	30	7


First, to determine the constant weight ratio of the CS/PVA mixture (70:30), cassava starch (4.2 g) was dispersed with distilled water (50 mL) in borosilicate glass, the addition of glycerol (3 g) served as a plasticizer and mechanical stirring was carried out until completely homogeneous. Furthermore, stirring with a magnetic stirrer at 250 rpm at a temperature of 95 °C for 30 minutes to obtain a gelatinized starch suspension. Meanwhile, in another borosilicate glass, the PVA solution was prepared by dissolving 1,8 g of PVA with 40 mL of distilled water and mechanically stirring (250 rpm) for 5 minutes, then the temperature was gradually increased to 95 °C and continuously stirred (250 rpm) for 30 minutes until completely dissolved and a clear solution is formed. Mixing of the two solutions (gelatinized CS suspension- PVA suspension) was carried out at room temperature and continued to be stirred with a magnetic stirrer (250 rpm, 95 °C).

Furthermore, the PVA solution, cassava starch suspension, and TiO<sub>2</sub> (0,5%, 1%, 3 %, 5%, and 7% wt) (**Table 1**) particle dispersion (CS/PVA-TiO<sub>2</sub>) were combined and stirred continuously at 400 rpm and a temperature of 95 °C for 30 minutes using a magnetic stirrer. The solution was in a vacuum for 10 minutes using vacuum machine to remove residual air from the solution. The viscous solution produced from the CS/PVA-TiO<sub>2</sub> polymer was poured into a Teflon mold (radius 50 mm). when pouring, the volume of the polymer mixture in each mold was controlled constant, producing relatively the same thickness as the nanocomposite film sample. The drying of the film was carried out in a hot air oven at 40 °C for 24 hours. The dry film was then carefully peeled off from the Teflon mold and produced a film with an average thickness of 100 μm. The resulting nanocomposite films were kept in a zippered bag until tests were carried out to reduce water absorption according to the Ramirez method [28].

### **2. 3. Fabrication of Rotary Disk Freestanding (RDF-TENG)**

The rotary disk freestanding TENG (RDF-TENG) structure consists of two parts, rotor and stator. Rotor structure parameters with the number of film segments ( $n$ ) = 4, outer radius ( $r_2$ ) = 50 mm, inner radius ( $r_1$ ) = 5 mm, and made of commercial polyimide thin film (0.03 mm) as a triboelectric film glued to an acrylic surface (radius = 50 mm). Meanwhile, the stator structure parameters consisting of CS-PVA/TiO<sub>2</sub> nanocomposite films were cut to form an equal interval electrode model with the number of film segments ( $n$ ) = 8, outer radius ( $r_2$ ) = 50 mm, inner radius ( $r_1$ ) = 5 mm, and the nanocomposite film thickness was 100 μm. Next, the cut nanocomposite film was glued to the copper foil (electrode film A, and B). Where the tip of the copper foil electrode is slightly exaggerated to connect the external circuit with the help of a conducting wire so that electrons can flow into the external circuit. External mechanical energy uses a DC electric motor that is connected to the TENG rotor shaft in a freestanding rotational mode. Meanwhile, the gap between the rotor and stator was controlled with a distance of 0,10 mm to keep the friction between the surface of the polyimide film and the CS/PVA-TiO<sub>2</sub> nanocomposite film stable. The design and structure of RDF-TENG with cassava starch/PVA-TiO<sub>2</sub> nanocomposite films are presented in **Fig. 2a**.



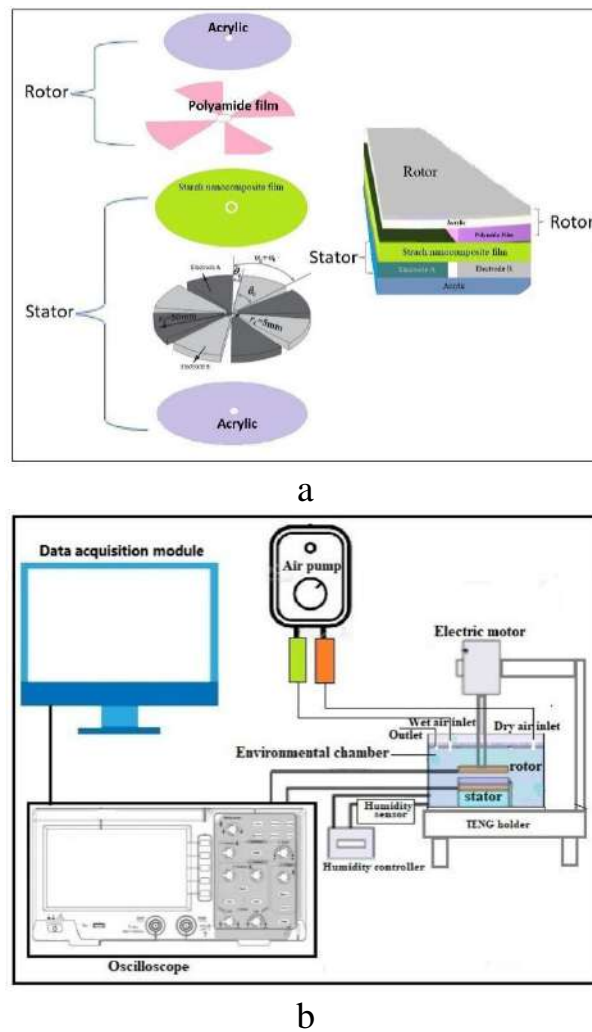

**Fig. 2.** RDF-TENG testing and structure: a - RDF TENG array, b- TENG testing instrument

The schematic diagram of the TENG output test mechanism is shown in **Fig. 2b**. Conditioning for humidity levels of 15% and 95% were carried out by placing the TENG in a closed cylindrical chamber. The operating Rotary-disk freestanding (RDF-TENG) mode consists of a rotor with four electret sectors attached to a dielectric substrate using a polyimide film. The stator is composed of six sectors of a CS-PVA/TiO<sub>2</sub> nanocomposite film connected to a copper foil electrode. Distance between the rotor and stator surfaces with an air gap of 0.10 mm.

## 2. 4. Characterizations of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films

### 2. 4. 1. Chemical, structural, and morphological analysis

Surface analysis and morphology of starch/PVA-TiO<sub>2</sub> nanocomposite films using Scanning Electron Microscope (FESEM) FEI Quanta FEG 650. The dry film sample was sprayed with gold-palladium under vacuum conditions to increase its conductivity. The test was carried out at a voltage of 15xKV with a magnification of 500x, and 10Kx. The functional groups of the nanocomposite films were analyzed using Fourier transform infrared spectroscopy (FTIR) with an IRPrestige-21 spectrophotometer (Shimadzu, USA). FTIR measurements were carried out at room temperature (25 ±10

C) in the wave number range of 600–4000  $\text{cm}^{-1}$  with a resolution of 2  $\text{cm}^{-1}$  and an average of more than 32 scans. The X-ray diffraction (XRD) analysis to determine the crystalline atom form of starch/PVA-TiO<sub>2</sub>. The degree of crystallinity of the film samples was recorded using a PAN analytical Xpert Pro diffractometer with Cu K $\alpha$  radiation at 40kV and 40 mA, using a 20 mm Ni filter. All sample films were scanned between  $2\theta = 5^\circ$  to  $69.99^\circ$  at  $5^\circ/\text{min}$  measurement Temperature of  $25^\circ\text{C}$ .

#### **2. 4. 2. Mechanical properties**

Testing the mechanical properties of the film consists of tensile strength (Ts), Elongation at break (Eb), and Young's Modulus (My). Testing according to the ASTM standard method D882-10 (ASTM, 2010) using the Tensile Testing Machine. The samples film (length  $\times$  width  $\times$  thickness = 100 mm  $\times$  20 mm  $\times$  5 mm) was conditioned at RH = 55% for 48 hours. Next, each film sample was mounted between the machine's grips and tested at a crosshead speed of 5 mm/min at room temperature ( $23^\circ\text{C}$ ) [29].

#### **2. 4. 3. Water-resistance**

Water resistance testing was conducted to identify the degree of water damage to the film. The film samples (length  $\times$  width  $\times$  thickness = 100 mm  $\times$  20 mm  $\times$  0.5 mm) were immersed into beakers filled with distilled water. The immersion time of each film sample until the film texture was damaged (destroyed) in the water. The results of recording the immersion time of the film sample were used to determine the level of resistance of the film sample to water.

#### **2. 4. 4. Water contact angle**

Measurement of the contact angle of the nanocomposite film was carried out to determine the level of wettability of the film surface to water. The sample contact angle was measured using a contact angle goniometer (Rame-Hart Instrument C, USA). The film sample (length  $\times$  width  $\times$  thickness = 25 mm  $\times$  25 mm  $\times$  0.5 mm) was placed horizontally on the contact angle measuring bench by the sessile drop method [30]. Drops of 4  $\mu\text{L}$  deionized water were placed on the film's top surface. droplet images and contact angle values are recorded from the software 20 seconds after deposition. The contact angle is calculated using a mathematical equation with the shape of a water droplet and calculates the tangent line between the water droplet and the solid film. For each film sample, 5 readings were taken at different film locations.

#### **2. 4. 5. Electrical output measurement**

TENG output performance measurement using freestanding rotary mode. The rotating mechanical energy of the DC motor is used to rotate the TENG rotor. To measure the TENG output voltage and current, the TENG rotor is energized externally by the DC motor rotation. The rotation is controlled at 200 rpm using a controller that regulates the electric current entering the DC electric motor. The rotation of the rotor on the stator causes friction on the surface of the polyimide film and the CS-PVA/TiO<sub>2</sub> nanocomposite film causing a triboelectricity effect. The electrode poles of films A and B were measured output voltage and current using a digital oscilloscope (DSOX6004A Digital Storage Oscilloscope) with a load resistance of 100 M $\Omega$ . Meanwhile, the TENG

output performance test based on CS-PVA/TiO<sub>2</sub> nanocomposite films under different humidity conditions was carried out in a cylindrical chamber, before the testing film was put in a closed box for 24 hours with adjusted humidity control (RH 15%, and 95%) with a saturated salt solution. Furthermore, testing the output performance of TENG in the same humidity control box was carried out in a closed cylindrical chamber, a cylindrical chamber equipped with two inlets and one outlet. Where the first inlet drains dry air (located on the right), and the second inlet drains moist air (located on the left). Meanwhile, the outlet is used to control air circulation in the cylinder (located on the left). This control mode can accurately achieve the required relative humidity in the room.

### **3. Results and discussion**

#### **3. 1. Chemical, structural, and morphological analysis of the cassava starch-PVA/TiO<sub>2</sub> nanocomposite film**


Structural analysis can be observed from the FTIR spectrum of the material in the range of 4000–700 cm<sup>-1</sup>. Where the molecular bond spectra of the CS/PVA polymer matrix and the change after incorporation of TiO<sub>2</sub> filler which has several characteristic peaks reflect the structure of the two biopolymers. The transmittance band of about 3285 cm<sup>-1</sup> was determined from the stretching vibration of the hydroxyl group (–OH) in CS and PVA polymers having a hydroxyl-rich average. The peak transmittance band of 1641.42 cm<sup>-1</sup> indicates the formation of hydrogen bonds in pure starch due to the flexion of the –OH molecule and shows the hygroscopic nature of the starch polymer. Characteristics of the bending of C-OH in the 1205 cm<sup>-1</sup> transmittance band. The peak at 770 – 1120 cm<sup>-1</sup> is associated with the stretching of the C–O bond of the macromolecular portion, where an intramolecular hydrogen bond is formed between two adjacent OH groups that are on the same side of the plane of the C–C carbon chain of the C–O–C group of the unit. glucose in starch [31].

Pure PVA showed hydroxyl and acetate groups, where the intermolecular and intramolecular hydrogen –OH bonds were shown in a wider band at 3296.35 cm<sup>-1</sup>.

The structure of the alkaline group confirmed the peak in the transmission band 1480 – 1190 cm<sup>-1</sup> associated with the planar buckling vibrations of C–H and O–H in both CS and PVA. The presence of a carbonyl group (C=O) is indicated by the 1732 cm<sup>-1</sup> transmission band and a hydrocarbon (alkane) group in PVA is indicated by a peak at 1373.32 cm<sup>-1</sup> [32]. Meanwhile, the chemical interaction between CS/PVA polymer molecules that causes changes in the characteristic spectral peaks of the composite, the C-OH hydrocarbon group is estimated to come from the C-O vibrations, which is confirmed by the peak of 1000-1250 cm<sup>-1</sup>. In addition, the vibration of the –OH group confirmed the absorption peak in the range of 3300-3000 cm<sup>-1</sup>. The formation of the C–H alkene functional group due to the mixing of CS/PVA which was confirmed at a wavelength of 675-995 cm<sup>-1</sup> and C-H alkane which was confirmed at a wavelength of 2850-2970 cm<sup>-1</sup>.

In addition, the C-H functional group of the aromatic ring was confirmed at the wavelength of 690–900 cm<sup>-1</sup>. The mixing of CS/PVA polymer showed flexural vibrations of the hydrogen bonding of the –OH group at 1710.86 cm<sup>-1</sup> and the C–O strain at 1050-1300 cm<sup>-1</sup>. The stronger interaction of CS/PVA molecules is shown by


intermolecular interactions through the formation of hydrogen bonds with water vapor molecules which can increase triboelectricity. At low concentrations (below 7 %  $\text{TiO}_2$  wt) in the CS/PVA polymer mixture in the FTIR spectrum, the vibration peaks did not show any additional peaks. This may be due to the overlapping bands of the CS/PVA components. However, the increase in  $\text{TiO}_2$  concentration (above 1%  $\text{TiO}_2$  wt) showed a slight shift in the peak positions of several bands in the range of 900-1100  $\text{cm}^{-1}$ . It is assumed that the absorption band at 1000  $\text{cm}^{-1}$  is associated with the  $\text{TiO}_2$  crystal domains hydrated into the CS/PVA polymer matrix. In addition, the titanium ions of the  $\text{TiO}_2$  particles can interact with the hydroxyl groups of CS/PVA, which make the nanocomposite films highly compatible. The results of the FTIR test for each concentration of  $\text{TiO}_2$  nanofiller in the cassava starch/PVA composite are presented in **Fig. 3**.

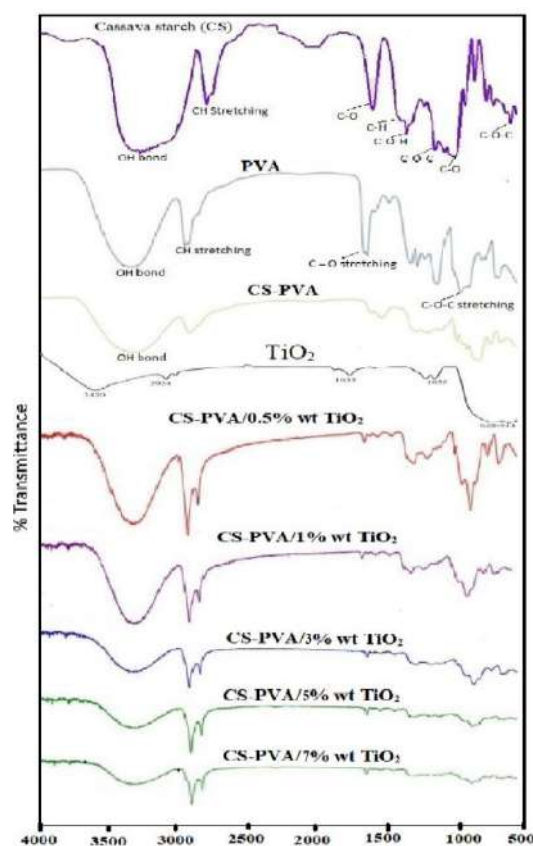

**Fig. 3.** Chemical formula analysis of cassava starch/PVA- $\text{TiO}_2$

The results of the XRD test for each concentration of  $\text{TiO}_2$  nanofiller in the cassava starch/PVA nanocomposite are presented in **Fig. 4**. Shows the XRD pattern of the sample film, the cassava starch film produced peaks at  $2\theta = 15.73^\circ$ ,  $16.51^\circ$ ,  $17.23^\circ$ ,  $19.69^\circ$ ,  $22.14^\circ$ , and  $24.37^\circ$ . Whereas, an important diffraction peak located at  $19.69^\circ$  which indicates strong intermolecular and intramolecular hydrogen bonds, and is indicative of a semi-crystalline structure, this is not much different from the signal of the  $20^\circ$  peaks of cassava starch [33]. Meanwhile, the CS-PVA composite sample formulation produced peaks at  $2\theta = 13.11^\circ$ ,  $17.21^\circ$ ,  $19.76^\circ$ , and  $24.54^\circ$ , which indicated a change in peak. These peaks can reveal that polymer cassava starch (CS) is dispersed in PVA which can change the characterization of the films [34-35]. The incorporation


of TiO<sub>2</sub> filler into CS/PVA with variations in TiO<sub>2</sub> concentration below 1% wt showed peak changes that were not easily visible at low concentrations. However, increasing the concentration above 1% by weight showed peaks at  $2\theta = 22.38^\circ$ ,  $27.60^\circ$ , and  $54.43^\circ$  in semicrystalline structure nanocomposite films and indicated the presence of titanium dioxide embedded in the CS/PVA polymer.

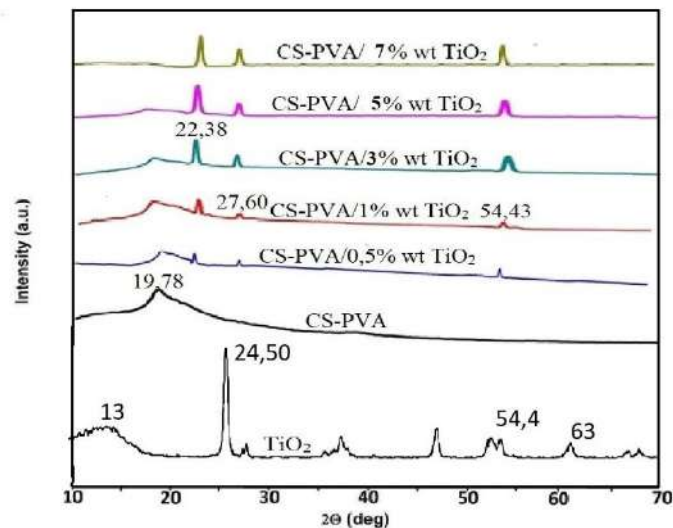


**Fig. 4.** XRD patterns for TiO<sub>2</sub> nanoparticle, CS/PVA, and CS/PVA-TiO<sub>2</sub> nanocomposite.

The morphology of the polymer mixture of cassava starch (CS)/PVA and the morphological changes of the nanocomposite films after the addition of TiO<sub>2</sub> can be observed from the material micrograph. The ability of starch granules to interact with various ceramic and mineral particles can hold these particles, which causes the added TiO<sub>2</sub> to adhere to the surface of the starch granules well. Meanwhile, mixing CS/PVA suspension with TiO<sub>2</sub> particles, during the gelatinization process, the TiO<sub>2</sub> particles remain attached to the surface of the starch granules and interact with the continuous phase macromolecules of water-soluble amylose and PVA, this process most likely occurs through hydrogen bonding. SEM photographs show the morphology of each film sample appears to have a heterogeneous surface relief (Fig. 5a). The CS/PVA blend film had a small amount of agglomeration, but the agglomeration formed was not very obvious. This is due to the strong interaction between the molecules of the CS/PVA blend and the compatibility of the CS/PVA blend. Meanwhile, the addition of TiO<sub>2</sub> nanoparticles to CS/PVA composites showed an increase in agglomeration formation. The addition of 7% wt TiO<sub>2</sub> nanoparticles to the CS/PVA composite showed the most agglomeration of TiO<sub>2</sub> and was clearly visible. This increase in agglomeration is due to the inert nature of TiO<sub>2</sub> as a filler of CS/PVA composites. Significant nano-TiO<sub>2</sub> agglomeration can affect the surface roughness of the nanocomposite film. The positive effect of the surface roughness of the nanocomposite film can be beneficial in improving the charge transfer on the friction surface when applied as a triboelectric nanogenerator (TENG) friction film. Furthermore, the possibility of TiO<sub>2</sub> nanoparticles with large specific surface area and high surface energy as a filler material for polymer

composites may cause some -OH groups in the biopolymer matrix to be adsorbed on the surface of nano-TiO<sub>2</sub> which can help the dispersion of TiO<sub>2</sub> particles in CS/PVA composites through van der Waals force (Fig. 5b). Whereas, this is in contrast with the addition of TiO<sub>2</sub> concentration of more than 1% wt indicating the association of filler particles in the composite. In addition, the presence of TiO<sub>2</sub> particles with a high ratio in the film can create a winding path that prolongs the transport of water vapor molecules.

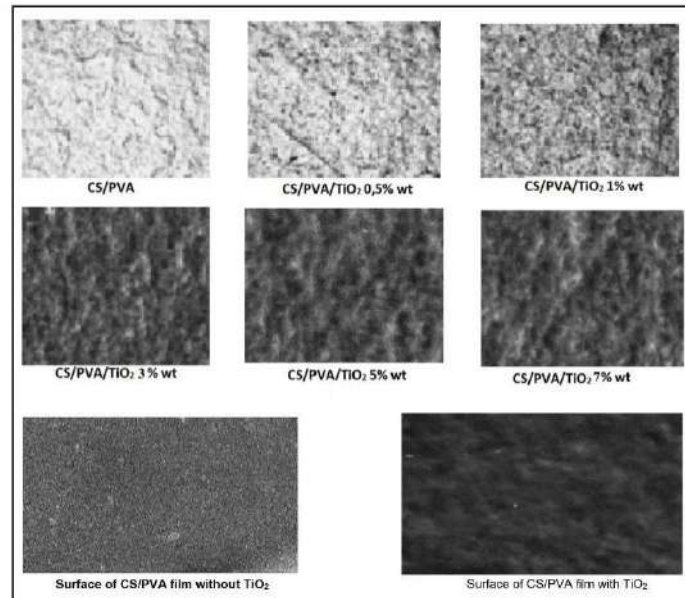

a

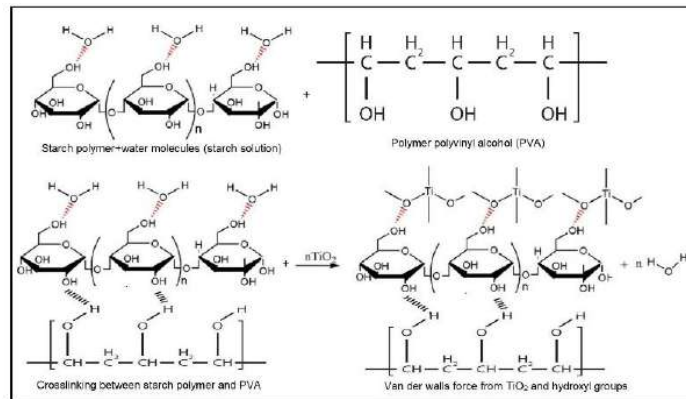

b

**Fig. 5.** Morphology surface and reaction between TiO<sub>2</sub> and polymer OH: a - surface photographs of CS/PVA without TiO<sub>2</sub> and with TiO<sub>2</sub>, b- hydroxyl groups adsorbed on nano-TiO<sub>2</sub> surface

### 3. 2. Mechanical properties

To analyze the performance of CS/PVA-TiO<sub>2</sub> nanocomposite films related to mechanical viability, tests were carried out which included; Tensile Strength (T<sub>s</sub>) is the maximum tensile stress that the material can sustain before failure, Young's modulus (M<sub>y</sub>) is the level of elasticity of the material under longitudinal traction, and elongation at break point (E<sub>B</sub>) is a measure of the elasticity of the material. The results of the study




of mechanical properties (**Table 2**) show that the tensile properties of the CS/PVA composite film are very good with 14.23 MPa and elongation at break point of 112.13%. The mechanical properties of CS/PVA composites are good due to the high mechanical properties of PVA due to the flexible C–C and a large number of –OH groups. In addition, the interaction of the –OH group of both CS and PVA polymers through hydrogen bonds makes good compatibility between CS and PVA polymers. So far, the results of previous studies reported that decreasing the concentration of PVA polymer in starch/PVA composites decreased the mechanical properties of the films [36, 37]. Meanwhile, the incorporation of TiO<sub>2</sub> particles into the CS/PVA composite showed a significant increase in the Tensile Strength value for the CS/PVA/TiO<sub>2</sub> film sample – 0.5 wt% increased from 14.23 MPa to 19.11 MPa. While the addition of TiO<sub>2</sub> – 1 wt% showed the optimal Tensile Strength of 21.20 MPa. However, the effect of TiO<sub>2</sub> on the CS/PVA composite caused the elongation at break value of the CS/PVA-TiO<sub>2</sub> nanocomposite to decrease. On the other hand, the addition of TiO<sub>2</sub> nanoparticles above 3 wt% shows that the Tensile Strength tends to decrease and the elongation at break tends to decrease. The possibility of adding more than 3 wt% of nanoparticles causes TiO<sub>2</sub> particles to agglomerate and spread unevenly. where these results are in line with research reported by previous researchers [31, 38]. besides, the concentration of filler material can increase the adhesion strength of the material [39-40]. The improvement of mechanical properties of cassava starch/PVA-TiO<sub>2</sub> nanocomposite films was in line with previous studies using a variety of fillers on starch/glycerol/Li composite films [41], and starch-sisal fiber [42]. In addition to fillers, the effect of using glycerol also has an impact on the properties of elongation at the break [43, 44], dan Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties [45–49]. The results of testing the mechanical properties of the film with variations in the percentage of TiO<sub>2</sub> content were 0.5%, 1 %, 3 %, 5 %, and 7 % are presented in **Table 2**.

**Table 2**

Mechanical Characterization of Nanocomposite Film

Composite Sample	Mechanical Characterization		
	Ultimate Tensile Strength (Ts), MPa	Elongation at break (Eb), %	Young's Modulus (My), MPa
CS-PVA	14.23±2.25	112.13±2.28	70.27±4.12
CS-PVA/0,5 TiO <sub>2</sub> wt%	19.11±1.35	80.45±9.25	113.38±4.57
CS-PVA/1 TiO <sub>2</sub> wt%	21.20±2.52	78.20±17.12	75.45±6.59
CS-PVA/3 TiO <sub>2</sub> wt%	10.13±1.26	81.43±4.22	73.27±8.53
CS-PVA/5 TiO <sub>2</sub> wt%	9.27±1.60	76.23±2.55	75.83±8.12
CS-PVA/7 TiO <sub>2</sub> wt%	9.50±1.75	73.23±15.54	74.76±9.35




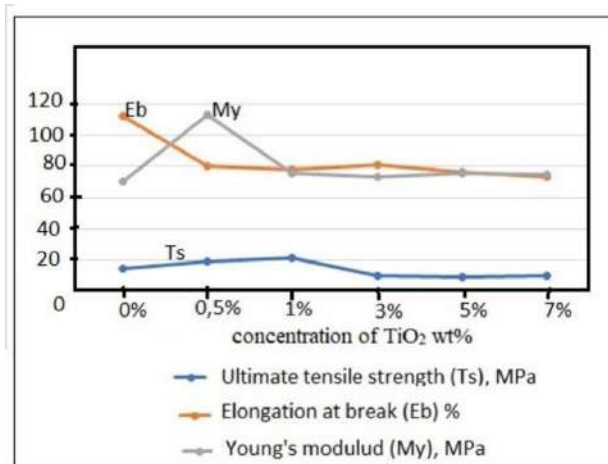

**Fig. 6.** Comparison of Ts, Eb, and My values of CS/PVA-TiO<sub>2</sub> nanocomposite films due to different concentrations of TiO<sub>2</sub>

### 3. 3. Water-resistance of CS/PVA-TiO<sub>2</sub> nanocomposite films

The water resistance test of CS/PVA-TiO<sub>2</sub> nanocomposite films aims to determine the degree of film damage when interacting with water molecules. The test method and results of water-resistance testing of nanocomposite films are presented in **Fig. 7**. To determine the water resistance of CS/PVA-TiO<sub>2</sub> nanocomposite films, it was carried out by immersing the nanocomposite films in cylindrical beaker filled with distilled water. Dimensions of the film tested L x w x h (30 x 20 x 0.01 mm). The immersion film was carried out until the film texture was damaged and crushed, as presented in (**Fig. 7, a**). The water resistance test results of the films are presented (**Fig. 7, b**), the water resistance of CS/PVA nanocomposite films with TiO<sub>2</sub> nanofiller increased 2-fold compared to that without TiO<sub>2</sub>. where, the water resistance of the CS film for 17 hours, CS/PVA increased for 20 hours, and the optimal water resistance of the SC/PVA-TiO<sub>2</sub> nanocomposite film for 32 hours with the addition of 7% by weight of TiO<sub>2</sub>. The resistance of CS films is influenced by the number of hydroxyl groups in the polymer molecule, where the hydroxyl groups bind to water molecules by forming hydrogen bonds. The increase in the number of hydroxyl groups in the CS/PVA film can occur from the intramolecular interaction of the CS/PVA polymer mixture, which can significantly increase the binding of water molecules. Meanwhile, the waterproof properties of CS/PVA-TiO<sub>2</sub> nanocomposite films can be due to the influence of hydroxyl groups that bind water molecules through hydrogen bonds. In addition, the presence of TiO<sub>2</sub> in the CS/PVA polymer mixture makes the film denser, thereby increasing the absorption capacity of water molecules. On the other hand, TiO<sub>2</sub> also has hydrophobic properties which can slow down the absorption of water molecules on the surface film. This result is not much different from the results of previous research reports, the effect of TiO<sub>2</sub> nanofiller in polymer films causes a decrease in moisture penetration of corn starch/PVA-TiO<sub>2</sub> films [38], Potato Starch/Montmorillonite-TiO<sub>2</sub> composite films [31], Potato starch/lactucin-TiO<sub>2</sub> composite films [46].

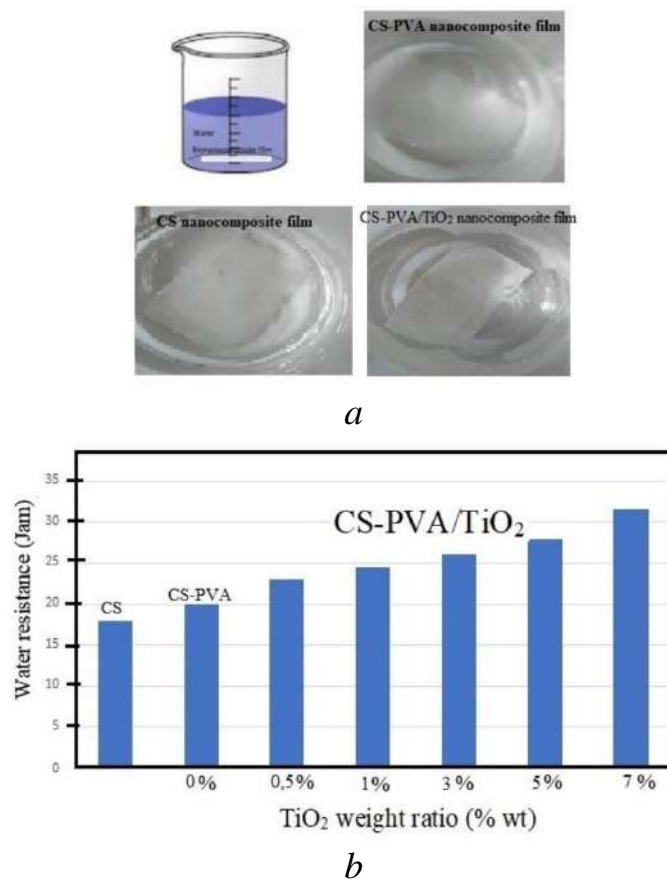


**Fig. 7.** Methods and analysis of water resistance: *a* – film testing method; *b* – results of water resistance testing of CS/PVA-TiO<sub>2</sub> nanocomposite films

### 3. 4. Water contact angle

Water contact angle measurements were carried out to evaluate the wettability of the surface of the film against water molecules. The CS/PVA composite film sample yielded a value of 69,9° indicating hydrophilic properties.

The hydrophilic properties increased due to the increase in polar groups such as C—O and —OH due to the mixing of PVA polymer with water-soluble properties. This increase in the —OH group increases the ability to form hydrogen bonds with water molecules resulting in higher wettability. The decrease in the water contact angle on the surface of the starch/PVA film was in line with previous studies which was caused by an increase in the hydroxyl chains [34, 37, 38]. Meanwhile, the addition of TiO<sub>2</sub> to the CS/PVA composite with the addition of 0.5 wt% to 7 wt% TiO<sub>2</sub> nanoparticles showed a trend of increasing the contact angle of the film surface (70.8°, 71.1°, 74.3°, 77.5°, 83.6°) (Fig.8). The increase in contact angle was due to the distribution of TiO<sub>2</sub> particles on the surface of the CS/PVA-TiO<sub>2</sub> nanocomposite films. The increase in the coarser surface structure of the film is the basis for increasing the hydrophobicity of the film. where, the results of this study are in line with previously reported studies [48, 49].

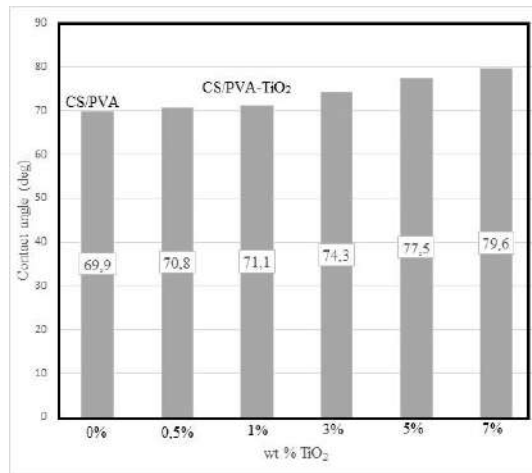

**Fig. 8.** The water contact angle of CS/PVA nanocomposite film vs CS/PVA-TiO<sub>2</sub> nanocomposite film

### 3.5. Limitations of the study and development prospects


The limitations of the CS/PVA-TiO<sub>2</sub> nanocomposite film study are still limited to the physicochemical properties of the film to overcome the reduced performance of solid-solid TENG under high humidity conditions by increasing the hydroxyl groups that can bind water vapor molecules through hydrogen bonding, and increasing the density of the film by using TiO<sub>2</sub> fillers for increased absorption of water molecules. However, the tribological performance of CS/PVA-TiO<sub>2</sub> nanocomposite film when the relative humidity is high has not been studied in detail. This is important to do as a parameter of the durability of the CS/PVA-TiO<sub>2</sub> nanocomposite film as a triboelectric nanogenerator (TENG) friction film. The direction of further development studies can examine the tribological properties of CS/PVA-TiO<sub>2</sub> nanocomposite films that tend to be hydrophilic, such as; the effect of TiO<sub>2</sub> fillers in the CA/PVA composite matrix on the level of surface roughness, and the effect of relative humidity on the coefficient of friction, mass loss, short circuit current, and open circuit voltage for the surface of CS/PVA-TiO<sub>2</sub> nanocomposite films.

### 3. 6. Performance TENG of CS/PVA-TiO<sub>2</sub> nanocomposite films

The TENG current output mechanism can be divided into three stages (**Fig. 9**). In the first stage, at the initial position, the electrode A is parallel to the electret. In the second stage, the electret rotates the position of electrode A and electrode B parallel to the electret causes the charge on electrode A to be transferred to electrode B through an external load (resistor) and generate current and voltage across the load resistor during this working period. The third stage is the final state where electrode B is parallel to the electret. While the TENG output circuit uses a rectifier diode and a capacitor as electrical storage to convert AC to DC before being channeled to the ED load.

TENG performance measurements (**Fig. 9**) were carried out at different humidity levels (15%, and 95%), the rotor rotation speed was controlled stable ( $\omega = 200$  rad/s), and the load was 50M $\Omega$ . TENG output performance test with CS-PVA triboelectric film without TiO<sub>2</sub> at low humidity level (RH, 15%), as shown in (**Fig. 10**). The results


of the output voltage and current output voltage and current  $\sim 25.5$  V and  $\sim 3.6$   $\mu$ A without addition of  $\text{TiO}_2$  in CS-PVA nanocomposite matrix, are presented in (**Fig. 10, a, b**). Meanwhile, the addition of  $\text{TiO}_2$  in the weight ratio (0% to 7 % wt  $\text{TiO}_2$ ) showed a linear increase in voltage and current, respectively, as shown in (**Fig. 10, a, b**). The optimal output voltage and current were achieved at a concentration of 3%wt  $\text{TiO}_2$  with a value of 112.5 V and 10.2  $\mu$ A. This increase in output voltage and current is due to an increase in the value of the dielectric constant due to the presence of  $\text{TiO}_2$  in the CS-PVA polymer mixture which can increase the triboelectric of the film. These results show similarities with some of the results of previous research reports, such as; an increase in dielectric properties of Poly (Vinylidene Fluoride) film with  $\text{TiO}_2$  NP deposition [9],  $\text{TiO}_2$  doping on Portland Cement [46], Dielectric constant changes linearly as a function of weight ratio of PDMS embedded  $\text{TiO}_x$  NP [10], natural rubber (NR)- $\text{TiO}_2$  [11].

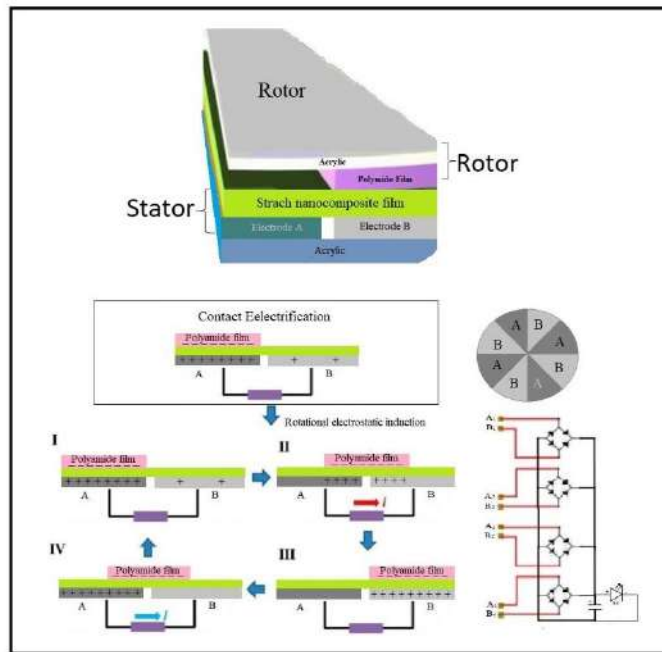


**Fig. 9.** Measurement of rotary disc freestanding TENG (RDF-TENG) with electrode components A, and B using copper tape thickness 1 mm, and electronic components (bridge diode 1A 500V), electrolytic capacitor 1000uF 16V, Light Emitting Diode lamp voltage 2,5 V)

In addition, the effect of differences in relative humidity factors (RH, 15%, and 95%) on the output performance of CS/PVA- $\text{TiO}_2$  film-based TENG at a weight ratio above 3 %  $\text{TiO}_2$  shows that the resulting voltage and current increase are directly correlated with increased humidity levels (**Fig. 10**). The output performance of TENG when the relative humidity condition 15% showed an output voltage  $\sim 112.5$  V and current  $\sim 10.2$   $\mu$ A (**Fig. 10, a, b**). Enhanced relative humidity of the cylinder chamber is carried out by continuously injecting wet air into the closed cylinder chamber to increase the humidity 95% (as shown in **Fig. 9**). Under conditions of relatively high humidity (95%), TENG can produce  $\sim 180$  V and current from  $\sim 13.7$   $\mu$ A. However, the

TENG output voltage and current increase was lower at a  $\text{TiO}_2$  weight ratio of less than 3 %, as shown in (Fig. 11). Meanwhile, the increase in TENG optimal output voltage and current when humidity is high (RH, 95%) with a concentration of 7%  $\text{TiO}_2$  wt can reach 1.6-fold from ~112.5 V to ~180 V, and the current increases 1.4-fold from ~10.2  $\mu\text{A}$  to ~13.7  $\mu\text{A}$  (Fig. 10), and (Fig. 11). The output voltage and current of RDF-TENG when the humidity is 15% are presented in Fig. 10, and the humidity is 95% are presented in Fig. 11.

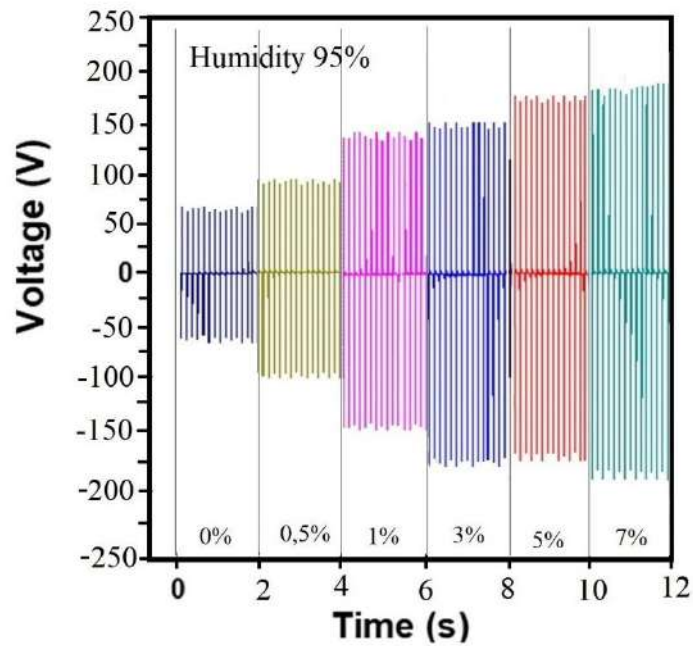


*a*

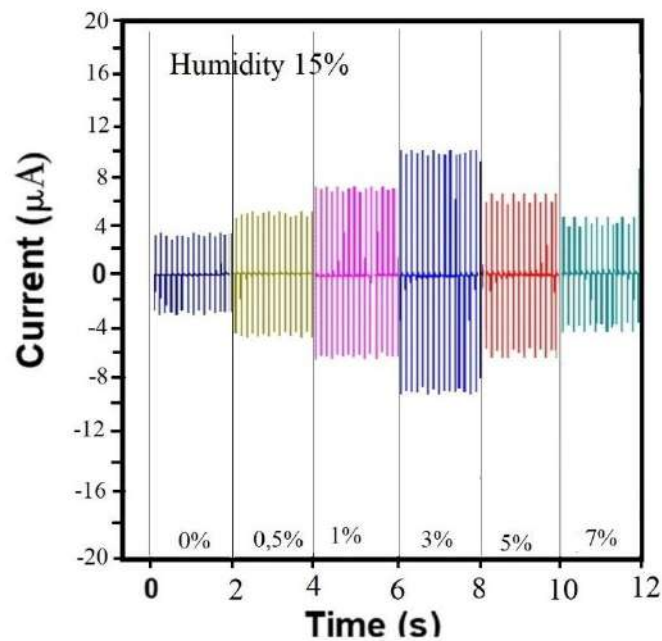


*b*

**Fig. 10.** Performance RDF-TENG at humidity 15%: *a* – open circuit output voltage

( $V_{oc}$ );  $b$  – closed circuit output current ( $I_{sc}$ )

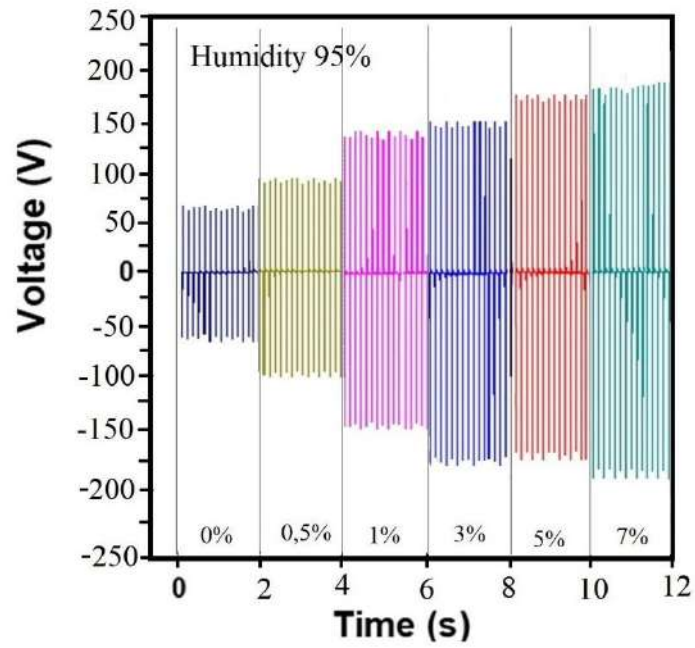

*a*

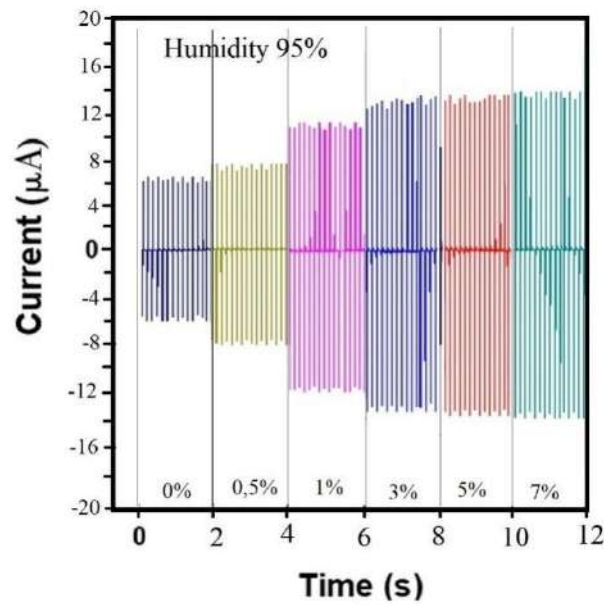

**b**

*b*

**Fig. 11.** Performance RDF-TENG at humidity 95 %: *a* – open circuit output voltage ( $V_{oc}$ ); *b* – closed circuit output current ( $I_{sc}$ )

The increase in RDF-TENG output voltage and current is caused by the formation of hydrogen bonds between hydroxyl groups and water molecules (when humidity is high) on the surface of the CS-PVA/TiO<sub>2</sub> nanocomposite film increasing the positive triboelectrification properties of the film. This is not much different from the research

reported by Wang et al. using starch polymers rich in hydroxyl groups with the formation of hydrogen bonds with water molecules when humidity is high can increase the output current of RDF-TENG based starch films [50]. PVA film is rich in hydroxyl chains and can increase the number of hydroxyl chains when mixed with starch molecules. In this case, it can bind more water molecules when the humidity is high and increase participation in triboelectric charging. The results of this study are also in line with previous studies using hydroxyl-rich biofilms, at high humidity of 95% a water molecule bonds with the hydroxyl through hydrogen bonds which increases the generation of charge when the two films rub together and increases RDF-TENG work [51].

#### **4. Conclusions**

We developed a cassava starch (CS)/PVA-TiO<sub>2</sub> nanocomposite film using the solvent casting method for the application of the RDF-TENG triboelectric film. The addition of TiO<sub>2</sub> to the CS/PVA polymer composite from the SEM and XRD tests showed that the TiO<sub>2</sub> nanoparticles were evenly incorporated into the CS/PVA polymer matrix, and affected the crystal structure of the film. In addition, the presence of TiO<sub>2</sub> nanoparticles in the CS/PVA polymer resulted in an increase in Tensile Strength of 19.11 MPa for a 0.5% wt TiO<sub>2</sub> sample, and an optimal Tensile Strength of 21.20 MPa with a concentration of 1% wt TiO<sub>2</sub> but the elongation at break value of the nanocomposite film CS/PVA-TiO<sub>2</sub> decreased. In addition, the effect of TiO<sub>2</sub> particles increases water resistance and decreases water wettability with an increase in the water contact angle of 83.60 at a concentration of 7% wt TiO<sub>2</sub> which means an increase in hydrophobic properties. The performance of RDF-TENG films without the addition of TiO<sub>2</sub> on the CS-PVA nanocomposite matrix resulted in an output voltage and current of ~25.5 V and ~3.6  $\mu$ A, and the performance RDF-TENG increased optimally with the addition of 3% TiO<sub>2</sub> with an increase in the output voltage of 4.4-fold, and current 2.8-fold. while performance under different humidity conditions (15% and 95% RH) output voltage increased 1.6-fold and current increased 1.4-fold with output voltage and current from ~112.5 V to ~180 V and current respectively from ~10.2  $\mu$ A to ~13.7  $\mu$ A. The increase was caused by the interaction of hydroxyl groups and water molecules through hydrogen bonds and the availability of free oxygen due to the distribution of TiO<sub>2</sub> particles which increased the positive triboelectrification properties of the film. The performance of RDF TENG with low rotation and small torque has shown a relatively constant conversion efficiency. This is different from other rotational power generation machines, such as electromagnetic generators (EMG) which require high rotation and large torque to improve conversion efficiency. This provides an alternative solution for energy conversion models especially low mechanical energy by using triboelectric nanogenerator models.

#### **Conflict of interest**

The authors declare no conflict of interest. The funders had no role in research design; in the collection, analysis, or interpretation of data, in the writing of the manuscript which may influence the work reported in this paper, or in the decision to publish its results.



## Financing

This work is supported and funded by the Institute for Research and Community Service, Universitas Negeri Surabaya (Unesa), with a grant contract number B/37502/2022.

## Data availability

Manuscript has data included as electronic supplementary material, in a data repository; <https://github.com/arisansori/Supplementary-Materials-.git>

## Acknowledgements

We gratefully acknowledge the support of the Surabaya State University (Unesa) Research and Community Service Institute, for research funding with a grant contract number: B/37502/2022. We are also grateful for the technical support from the Energy Conversion Laboratory at the Department of Mechanical Engineering, University Brawijaya, Central Laboratory of Life Sciences, University Brawijaya, and Advanced Mineral & Material Central Laboratory FMIPA, State University of Malang.

## References

- [1] G. I. Dzhardimalieva, B. C. Yadav, T. V. Lifintseva, and I. E. Uflyand, "Polymer chemistry underpinning materials for triboelectric nanogenerators (TENGs): Recent trends," *Eur. Polym. J.*, vol. 142, p. 110163, 2021, doi: 10.1016/j.eurpolymj.2020.110163.
- [2] J. Wang *et al.*, "Achieving ultrahigh triboelectric charge density for efficient energy harvesting," *Nat. Commun.*, vol. 8, no. 1, pp. 1–7, 2017, doi: 10.1038/s41467-017-00131-4.
- [3] K. Xia, J. Fu, and Z. Xu, "Multiple-Frequency High-Output Triboelectric Nanogenerator Based on a Water Balloon for All-Weather Water Wave Energy Harvesting," *Adv. Energy Mater.*, vol. 10, no. 28, pp. 1–9, 2020, doi: 10.1002/aenm.202000426.
- [4] G. Song *et al.*, "Molecularly Engineered Surface Triboelectric Nanogenerator by Self-Assembled Monolayers (METS)," *Chem. Mater.*, vol. 27, no. 13, pp. 4749–4755, 2015, doi: 10.1021/acs.chemmater.5b01507.
- [5] S. Mallakpour and N. Jarang, "Mechanical, thermal and optical properties of nanocomposite films prepared by solution mixing of poly(vinyl alcohol) with titania nanoparticles modified with citric acid and Vitamin C," *J. Plast. Film Sheeting*, vol. 32, no. 3, pp. 293–316, 2016, doi: 10.1177/8756087915597024.
- [6] Khushboo and P. Azad, *Design and implementation of conductor-to-dielectric lateral sliding TENG mode for low power electronics*, vol. 698, no. May. Springer Singapore, 2019.
- [7] H. W. Park *et al.*, "Electron blocking layer-based interfacial design for highly-enhanced triboelectric nanogenerators," *Nano Energy*, vol. 50, pp. 9–15, 2018, doi: 10.1016/j.nanoen.2018.05.024.
- [8] P. Trihutomo, Marji, M. Harly, B. A. Wahyudi, and M. B. Radja, "the Effect of Clathrin Protein Addition on Increasing the Number of Electrons in Organic

Dye-Sensitized Solar Cell (Dssc),” *EUREKA, Phys. Eng.*, vol. 2022, no. 2, pp. 15–27, 2022, doi: 10.21303/2461-4262.2022.001957.

[9] P. Kum-onsa *et al.*, “Gold-nanoparticle-deposited TiO<sub>2</sub> nanorod/poly(Vinylidene fluoride) composites with enhanced dielectric performance,” *Polymers (Basel)*, vol. 13, no. 13, pp. 1–14, 2021, doi: 10.3390/polym13132064.

[10] N. D. Huynh, H. Park, K. Chung, and D. Choi, “Effect on TENG Performance by Phase Control of TiO<sub>x</sub> Nanoparticles,” *Compos. Res.*, vol. 31, no. 6, pp. 365–370, 2018.

[11] W. Bunriw, V. Harnchana, C. Chanthad, and V. N. Huynh, “Natural rubber-TiO<sub>2</sub> nanocomposite film for triboelectric nanogenerator application,” *Polymers (Basel)*, vol. 13, no. 13, pp. 1–12, 2021, doi: 10.3390/polym13132213.

[12] Y. Wang, L. Zhang, and A. Lu, “Highly stretchable, transparent cellulose/PVA composite hydrogel for multiple sensing and triboelectric nanogenerators,” *J. Mater. Chem. A*, vol. 8, no. 28, pp. 13935–13941, 2020, doi: 10.1039/d0ta02010a.

[13] K. Shi, X. Huang, B. Sun, Z. Wu, J. He, and P. Jiang, “Cellulose/BaTiO<sub>3</sub> aerogel paper based flexible piezoelectric nanogenerators and the electric coupling with triboelectricity,” *Nano Energy*, vol. 57, pp. 450–458, 2019, doi: 10.1016/j.nanoen.2018.12.076.

[14] X. Chen, A. Yusuf, J. S. del Rio, and D. Y. Wang, “A facile and robust route to polyvinyl alcohol-based triboelectric nanogenerator containing flame-retardant polyelectrolyte with improved output performance and fire safety,” *Nano Energy*, vol. 81, p. 105656, 2021, doi: 10.1016/j.nanoen.2020.105656.

[15] R. Singh and H. W. Rhee, “The rise of bio-inspired energy devices,” *Energy Storage Mater.*, vol. 23, no. February, pp. 390–408, 2019, doi: 10.1016/j.ensm.2019.04.030.

[16] Z. Zhu, K. Xia, Z. Xu, H. Lou, and H. Zhang, “Starch Paper-Based Triboelectric Nanogenerator for Human Perspiration Sensing,” *Nanoscale Res. Lett.*, vol. 13, pp. 4–9, 2018, doi: 10.1186/s11671-018-2786-9.

[17] Y. Chi *et al.*, “Rice paper-based biodegradable triboelectric nanogenerator,” *Microelectron. Eng.*, vol. 216, no. June, p. 111059, 2019, doi: 10.1016/j.mee.2019.111059.

[18] V. Gots, P. Palchyk, and O. Berdnyk, “Investigation of Properties of Modified Basalt Fibers,” *EUREKA Phys. Eng.*, vol. 4, no. 4, pp. 43–48, 2018, doi: 10.21303/2461-4262.2018.00673.

[19] R. Ccorahua, J. Huaroto, C. Luyo, M. Quintana, and E. A. Vela, “Enhanced-performance bio-triboelectric nanogenerator based on starch polymer electrolyte obtained by a cleanroom-free processing method,” *Nano Energy*, vol. 59, no. March, pp. 610–618, 2019, doi: 10.1016/j.nanoen.2019.03.018.

[20] L. Shi *et al.*, “Enhanced performance triboelectric nanogenerators based on solid polymer electrolytes with different concentrations of cations,” *Nano Energy*, vol. 64, no. August, p. 103960, 2019, doi: 10.1016/j.nanoen.2019.103960.

[21] J. Shen, Z. Li, J. Yu, and B. Ding, “Humidity-resisting triboelectric nanogenerator for high performance biomechanical energy harvesting,” *Nano Energy*, vol. 40, pp. 282–288, 2017, doi: 10.1016/j.nanoen.2017.08.035.

[22] R. Ccorahua, A. Cordero, C. Luyo, M. Quintana, and E. Vela, "Starch-Cellulose-Based Triboelectric Nanogenerator Obtained by a Low-Cost Cleanroom-Free Processing Method," *MRS Adv.*, vol. 4, no. 23, pp. 1315–1320, 2019, doi: 10.1557/adv.2018.652.

[23] F. G. Torres, O. P. Troncoso, C. Torres, D. A. Díaz, and E. Amaya, "Biodegradability and mechanical properties of starch films from Andean crops," *Int. J. Biol. Macromol.*, vol. 48, no. 4, pp. 603–606, 2011, doi: 10.1016/j.ijbiomac.2011.01.026.

[24] J. Y. Kim, Y. G. Choi, S. R. Byul Kim, and S. T. Lim, "Humidity stability of tapioca starch-pullulan composite films," *Food Hydrocoll.*, vol. 41, pp. 140–145, 2014, doi: 10.1016/j.foodhyd.2014.04.008.

[25] R. Ccorahua, J. Huaroto, C. Luyo, M. Quintana, and E. A. Vela, "Enhanced-performance bio-triboelectric nanogenerator based on starch polymer electrolyte obtained by a cleanroom-free processing method," *Nano Energy*, vol. 59, pp. 610–618, 2019, doi: 10.1016/j.nanoen.2019.03.018.

[26] B. Ben Doudou, A. Vivet, J. Chen, A. Laachachi, T. Falher, and C. Poilâne, "Hybrid carbon nanotube - Silica/ polyvinyl alcohol nanocomposites films: Preparation and characterisation," *J. Polym. Res.*, vol. 21, no. 4, 2014, doi: 10.1007/s10965-014-0420-9.

[27] Fei P, Shi Y, Zhou M, Cai J, Tang S, Xiong H. Effects of nano-TiO<sub>2</sub> on the properties and structures of starch/poly( $\epsilon$ -caprolactone) composites. *J Appl Polym Sci*, vol. 130, no.6, pp. 4129-4136, 2013, doi:10.1002/app.39695

[28] J. Alvarez-Ramirez, J. Vazquez-Arenas, A. García-Hernández, and E. J. Vernon-Carter, "Improving the mechanical performance of green starch/glycerol/Li + conductive films through cross-linking with Ca<sup>2+</sup>," *Solid State Ionics*, vol. 332, no. November 2018, pp. 1–9, 2019, doi: 10.1016/j.ssi.2019.01.002.

[29] M. Zamanian, H. Sadrnia, M. Khojastehpour, F. Hosseini, and J. Thibault, "Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties of PVA films," *J. Membr. Sci. Res.*, vol. 7, no. 2, pp. 67–73, 2021, doi: 10.22079/JMSR.2020.112911.1283.

[30] N. E. Kochkina and O. A. Butikova, "Effect of fibrous TiO<sub>2</sub> filler on the structural, mechanical, barrier and optical characteristics of biodegradable maize starch/PVA composite films," *Int. J. Biol. Macromol.*, vol. 139, pp. 431–439, 2019, doi: 10.1016/j.ijbiomac.2019.07.213.

[31]. A. Oleyaei, H. Almasi, B. Ghanbarzadeh, and A. A. Moayedi, *Synergistic reinforcing effect of TiO<sub>2</sub> and montmorillonite on potato starch nanocomposite films: Thermal, mechanical and barrier properties*, vol. 152. Elsevier Ltd., 2016.

[32] A. M. Abdullah, S. B. Aziz, and S. R. Saeed, "Structural and electrical properties of polyvinyl alcohol (PVA):Methyl cellulose (MC) based solid polymer blend electrolytes inserted with sodium iodide (NaI) salt," *Arab. J. Chem.*, vol. 14, no. 11, p. 103388, 2021, doi: 10.1016/j.arabjc.2021.103388.

[33] A. D. Adamu, S. S. Jikan, B. H. A. Talip, N. A. Badarulzaman, and S. Yahaya, "Effect of glycerol on the properties of tapioca starch film," *Mater. Sci. Forum*, vol. 888 MSF, pp. 239–243, 2017, doi: 10.4028/www.scientific.net/MSF.888.239.

- [34] H. Abral, A. Hartono, F. Hafizulhaq, D. Handayani, E. Sugiarti, and O. Pradipta, "Characterization of PVA/cassava starch biocomposites fabricated with and without sonication using bacterial cellulose fiber loadings," *Carbohydr. Polym.*, vol. 206, pp. 593–601, 2019, doi: 10.1016/j.carbpol.2018.11.054.
- [35] R. Surudžić *et al.*, "Physico-chemical and mechanical properties and antibacterial activity of silver/poly(vinyl alcohol)/graphene nanocomposites obtained by electrochemical method," *Compos. Part B Eng.*, vol. 85, pp. 102–112, 2016, doi: 10.1016/j.compositesb.2015.09.029.
- [36] Tian, J. Yan, A. V. Rajulu, A. Xiang, and X. Luo, "Fabrication and properties of polyvinyl alcohol/starch blend films: Effect of composition and humidity," *Int. J. Biol. Macromol.*, vol. 96, pp. 518–523, 2017, doi: 10.1016/j.ijbiomac.2016.12.067.
- [37] S. Patil *et al.*, "Effect of polymer blending on mechanical and barrier properties of starch-polyvinyl alcohol based biodegradable composite films," *Food Biosci.*, vol. 44, no. PA, p. 101352, 2021, doi: 10.1016/j.fbio.2021.101352.
- [38] N. E. Kochkina and O. A. Butikova, "Effect of fibrous TiO<sub>2</sub> filler on the structural, mechanical, barrier and optical characteristics of biodegradable maize starch/PVA composite films," *Int. J. Biol. Macromol.*, vol. 139, pp. 431–439, 2019, doi: 10.1016/j.ijbiomac.2019.07.213.
- [39] A. Garbuz, P. Bilym, and D. Zubenko, "Features of Changes of Structure and Adhesive Properties for Acrylic Adhesives Under the Influence of the Filler," *EUREKA Phys. Eng.*, vol. 3, no. 3, pp. 13–16, 2016, doi: 10.21303/2461-4262.2016.00075.
- [40] A. A. Khalaf, S. A. Abed, S. S. Alkhfaji, M. A. Al-Obaidi, and M. M. Hanon, "the Effect of Adding Natural Materials Waste on the Mechanical Properties and Water Absorption of Epoxy Composite Using Grey Relations Analysis," *EUREKA, Phys. Eng.*, no. 1, pp. 131–142, 2022, doi: 10.21303/2461-4262.2022.001952.
- [41] J. Alvarez-Ramirez, J. Vazquez-Arenas, A. García-Hernández, and E. J. Vernon-Carter, "Improving the mechanical performance of green starch/glycerol/Li + conductive films through cross-linking with Ca<sup>2+</sup>," *Solid State Ionics*, vol. 332, no. November 2018, pp. 1–9, 2019, doi: 10.1016/j.ssi.2019.01.002.
- [42] M. Ji *et al.*, "Enhanced mechanical properties, water resistance, thermal stability, and biodegradation of the starch-sisal fibre composites with various fillers," *Mater. Des.*, vol. 198, p. 109373, 2021, doi: 10.1016/j.matdes.2020.109373.
- [43] P. Bergo, P. J. A. Sobral, and J. M. Prison, "Effect of glycerol on physical properties of cassava starch films," *J. Food Process. Preserv.*, vol. 34, no. SUPPL. 2, pp. 401–410, 2010, doi: 10.1111/j.1745-4549.2008.00282.x.
- [44] A. D. Adamu, S. S. Jikan, B. H. A. Talip, N. A. Badarulzaman, and S. Yahaya, "Effect of glycerol on the properties of tapioca starch film," *Mater. Sci. Forum*, vol. 888 MSF, pp. 239–243, 2017, doi: 10.4028/www.scientific.net/MSF.888.239.
- [45] Y. Wang *et al.*, "Development and characterization of potato starch/lactucin/nano-TiO<sub>2</sub> food packaging for sustained prevention of mealworms," *Food Packag. Shelf Life*, vol. 33, p. 100837, Sep. 2022, doi: 10.1016/J.FPSL.2022.100837.
- [46] J. Sintusiri, V. Harnchana, V. Amornkitbamrung, A. Wongsas, and P.

Chindaprasirt, "Portland Cement-TiO<sub>2</sub> triboelectric nanogenerator for robust large-scale mechanical energy harvesting and instantaneous motion sensor applications," *Nano Energy*, vol. 74, no. January, p. 104802, 2020, doi: 10.1016/j.nanoen.2020.104802.

[47] H. W. Park *et al.*, "Effects of embedded TiO<sub>2</sub>-x nanoparticles on triboelectric nanogenerator performance," *Micromachines*, vol. 9, no. 8, 2018, doi: 10.3390/mi9080407.

[48] M. Zamanian, H. Sadrnia, M. Khojastehpour, F. Hosseini, and J. Thibault, "Effect of TiO<sub>2</sub> nanoparticles on barrier and mechanical properties of PVA films," *J. Membr. Sci. Res.*, vol. 7, no. 2, pp. 67–73, 2021, doi: 10.22079/JMSR.2020.112911.1283.

[49] L. Rong, M. Shen, H. Wen, Y. Ren, W. Xiao, and J. Xie, "Preparation and characterization of hyacinth bean starch film incorporated with TiO<sub>2</sub> nanoparticles and Mesona chinensis Benth polysaccharide," *Int. J. Biol. Macromol.*, vol. 190, no. 235, pp. 151–158, 2021, doi: 10.1016/j.ijbiomac.2021.08.180.

[50] N. Wang *et al.*, "New Hydrogen Bonding Enhanced Polyvinyl Alcohol Based Self-Charged Medical Mask with Superior Charge Retention and Moisture Resistance Performances," *Adv. Funct. Mater.*, vol. 31, no. 14, pp. 1–14, 2021, doi: 10.1002/adfm.202009172.

[51] N. Wang, Y. Zheng, Y. Feng, F. Zhou, and D. Wang, "Biofilm material based triboelectric nanogenerator with high output performance in 95% humidity environment," *Nano Energy*, vol. 77, p. 105088, 2020, doi: 10.1016/j.nanoen.2020.105088.